Cisco.300-175.v2018-01-17.q235

Exam Code:	300-175
Exam Name:	Implementing Cisco Data Center Unified Computing
Certification Provider:	Cisco
Free Question Number:	235
Version:	v2018-01-17
# of views:	1425
# of Questions views:	93719
https://www.freecram.net/torrent/Cisco.300-175.v2018-01-17.q235.html	

NEW QUESTION: 1
Refer to the exhibit.

```
FI-A# scope org
FI-A /org# scope boot-policy Testing
FI-A /org/boot-policy # create san
FI-A /org/boot-policy/san* # set order 1
FI-A /org/boot-policy/san* # create san-image primary
FI-A /org/boot-policy/san/san-image* # set vhba vHBA3
FI-A /org/boot-policy/san/san-image* # create path primary
FI-A /org/boot-policy/san/san-image/path* # set lun 0
FI-A /org/boot-policy/san/san-image/path* # commit-buffer
FI-A /org/boot-policy/san/san-image/path #
```

You are configuring a Cisco UCS Fabric Interconnect. You associate a blade server to a service profile that has the Testing boot policy. Which statement describes the result of the configuration?
A. The iSCSI boot was created for the LAN boot policy.
B. The blade server fails to boot due to a missing configuration line of set order 0.
C. The blade server first tries to boot by using vHBA3 across the SAN network.
D. The blade server first tries to boot from the local storage, and if this fails, it boots from vHBA3.
Answer: C (LEAVE A REPLY)
Reference:http://www.cisco.com/c/en/us/td/docs/unified_computing/ucs/sw/cli/config/guide/
2-
2/b_UCSM_CLI_Configuration_Guide_2_2/configuring_server_boot.pdf

NEW QUESTION: 2

Which option lists the features that are needed to install VMware ESXi on a local drive from an image file?
A. Virtual Media and VMFS
B. Virtual Media and Virtual KVM
C. Virtual Boot and VMFS
D. Virtual KVM and Virtual Boot
Answer: (SHOW ANSWER)
Reference: http://www.techrepublic.com/blog/smb-technologist/installing-vsphere-on-cisco-ucs-cseries-servers/

NEW QUESTION: 3
Which two tasks can you perform from Cisco UCS Manager? (Choose two.)
A. Restart an Oracle database.
B. Configure SAN PIN groups.
C. Configure or manage external storage on the SAN.
D. Deploy an operating system.
E. Configure QoS classes and definitions.
Answer: (SHOW ANSWER)

NEW QUESTION: 4
You plan to implement FCoE on a Cisco UCS -Series server. Which option must you configure from the Cisco Integrated Management Controller GUI?
A. a vNIC failover
B. a boot table entry
C. NIV
D. FIP mode
Answer: (SHOW ANSWER)
Reference:
http://www.cisco.com/c/en/us/td/docs/unified_computing/ucs/c/sw/gui/config/guide/1-
2 1/b_Cisco_UCS_CSeries_Servers_Integrated_Management_Controller_Configuration_G uide_1_2
_ 1/Cisco_UCS_CSeries_Servers_Integrated_Management_Controller_Configuration_Guid e_1_2_
1_chapter9.html

NEW QUESTION: 5
Which three items represent some of the features that can be defined in a Cisco Unified
Computing System Manager port profile? (Choose three.)
A. NetFlow
B. network control policy
C. VLAN or VLANs
D. QoS policy
E. port security
F. ACL
Answer: B,C,D (LEAVE A REPLY)

NEW QUESTION: 6
Which protocol is not supported for Cisco UCS backups and imports?
A. SFTP
B. HTTP
C. SCP
D. TFTP
E. FTP
Answer: (SHOW ANSWER)

NEW QUESTION: 7
Which boot option is recommended for a boot policy because it offers the most service profile mobility within a system?
A. SAN boot
B. LAN boot
C. local disk boot
D. iSCSI boot
Answer: (SHOW ANSWER)

NEW QUESTION: 8
Which VMware ESXi 5.0 CLI command will validate PassThru interfaces when they are available?
A. vemifconfig -v
B. vempassthru-v
C. vem status -v
D. vempts -v
E. vemintf -v
Answer: (SHOW ANSWER)

NEW QUESTION: 9
Which two options are valid modes for VM-FEX in a Cisco UCS Manager port profile?
(Choose two.)
A. transparent
B. standard
C. bypass
D. advanced
E. low-pass
F. high-performance
Answer: (SHOW ANSWER)

NEW QUESTION: 10
You attempt to perform an ESXi update on a Cisco UCS C250 server, but the update does not recognize the NICs.
You must perform the update as quickly as possible. Which step must you do first?

Freecram.net

A. Reconfigure the NIC ID on the LOM.
B. Update the LOM firmware by using the Cisco Host Update Utility.
C. Update the NIC firmware by using the Cisco Host Update Utility.
D. Check the UCS compatibility matrix and replace the NIC with a supported one.
Answer: (SHOW ANSWER)

NEW QUESTION: 11
Which two components can be specified in a host firmware package? (Choose two.)
A. DIMM
B. CPU
C. Cisco Integrated Management Controller
D. BIOS
E. LOM
Answer: (SHOW ANSWER)

NEW QUESTION: 12
Which statement about fabric failover for Fibre Channel communication is true?
A. You can enable hardware Fibre Channel failover.
B. You must use a Fibre Channel multipath I/O driver.
C. Cisco UCS load balances Fibre Channel traffic between the two fabrics.
D. You do not have to use anything.
Answer: (SHOW ANSWER)

NEW QUESTION: 13
Scenario
In this scenario, you will refer to screenshots about Cisco UCS B-Series servers and UCS Manager.
Instructions
To access the multiple-choice questions, click on the numbered boxes on the left of the top panel.
There are four multiple-choice questions with this task.
Be sure to answer all four questions before selecting the Next button.


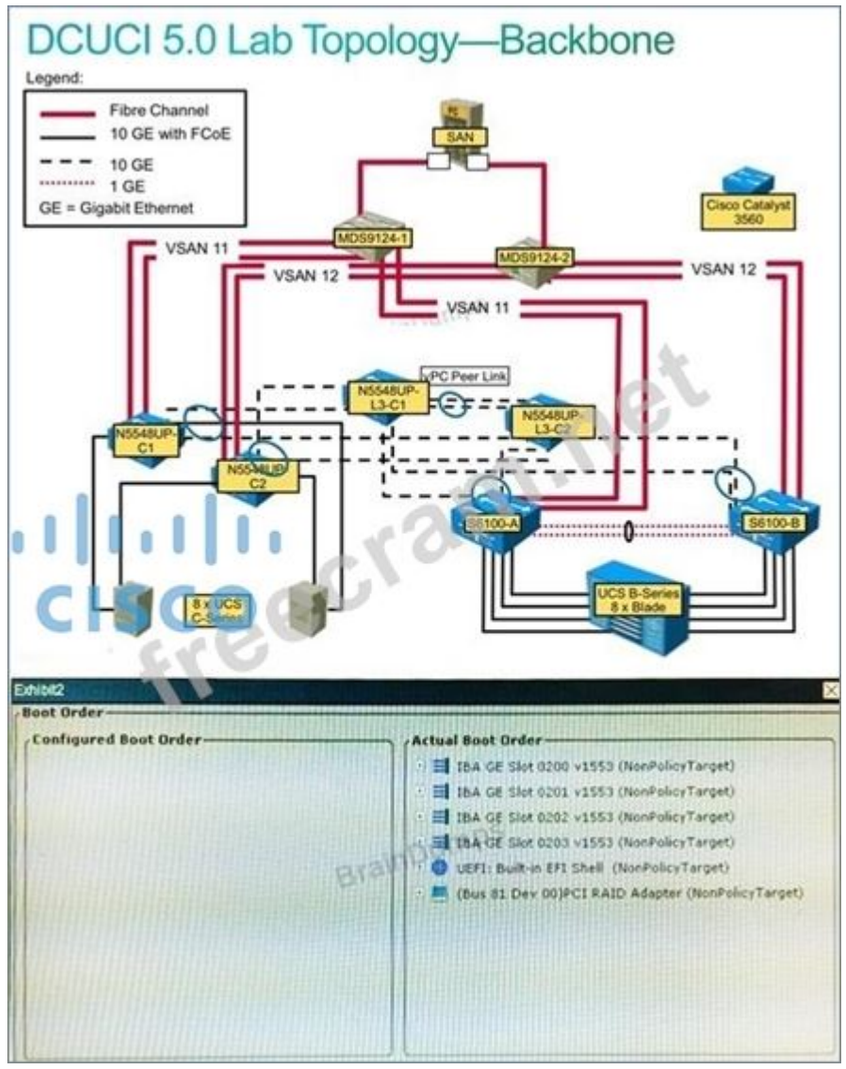

DCUCI 5.0 Lab Topology—Backbone
Legend:
Fibre Channel
10 GE with FCoE
10 GE
1 GE
GE = Gigabit Ethernet
SAN
Cisco Catalyst 3560
MDS9124-1
MDS9124-2
VSAN 11
VSAN 12
VSAN 12
VSAN 11
vPC Peer Link
N5548UP-L3-C1
N5548UP-L3-C2
N5548UP-C1
N5548UP-C2
S6100-A
S6100-B
UCS B-Series 8 x Blade
8 x UCS C-Series
Exhibit2
Boot Order
Configured Boot Order
Actual Boot Order
IBA GE Slot 0200 v1553 (NonPolicyTarget)
IBA GE Slot 0201 v1553 (NonPolicyTarget)
IBA GE Slot 0202 v1553 (NonPolicyTarget)
IBA GE Slot 0203 v1553 (NonPolicyTarget)
UEFI: Built-in EFI Shell (NonPolicyTarget)
(Bus 81 Dev 00)PCI RAID Adapter (NonPolicyTarget)


Exhibit5
cisco
User Details
User Properties
ID: 2
Enabled:
Username:
Role: read-only
Change Password:
New Password:
Confirm New Password:
Save Changes
Reset Values
Cancel

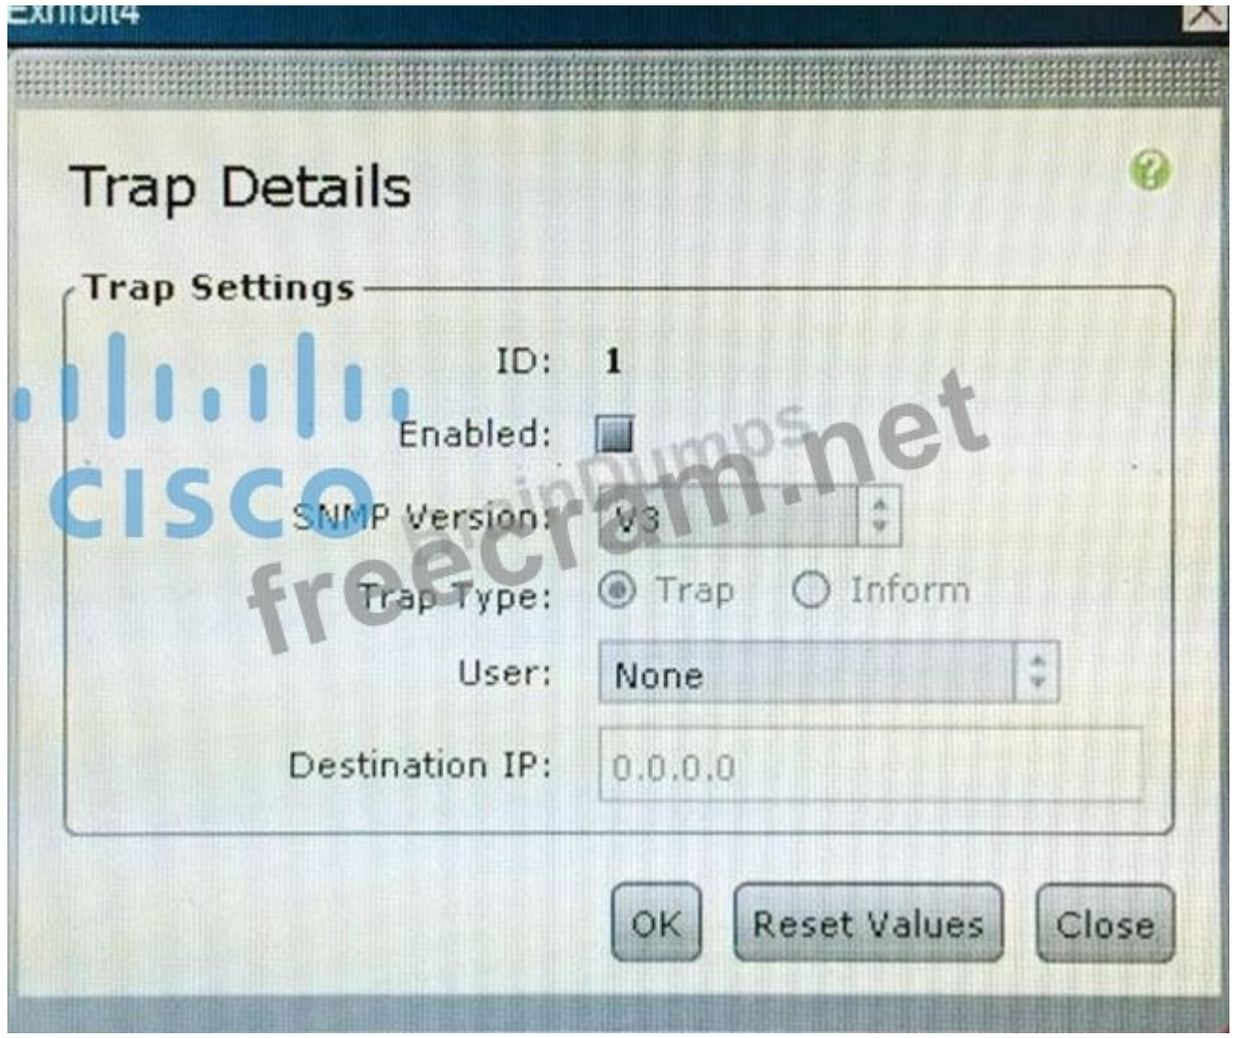

Refer to the screenshot in Exhibit 3. Which tab would you choose to determine that a user failed to login to Cisco IMC?

A. Fault Summary

B. System Event Log

C. CIMC Log

D. Logging Controls

Answer: C (LEAVE A REPLY)

Reference:

http://www.cisco.com/en/US/docs/unified_computing/ucs/c/sw/gui/config/guide/1.5/b_Cisco_UCS_C-series_GUI_Configuration_Guide.151_chapter_01110.html#d85279e21a1635

NEW QUESTION: 14

Which two prerequisites are required to configure a SAN boot from the FCoE storage of a Cisco UCS system? (Choose two.)

A. There must be IVR-enabled FCoE proxying between the Cisco UCS domain and the SAN storage device that hosts the operating system image.

B. The Cisco UCS domain must be able to communicate with the SAN storage device that hosts the operating system image.

C. A boot policy must he created that contains a local disk, and the LVM must be configured correctly.

D. There must be a boot target RAID on the device where the operating system image is located.
E. There must be a boot target LUN on the device where the operating system image is located.
Answer: (SHOW ANSWER)

NEW QUESTION: 15
Which options are valid port types when configuring fixed 10-Gb LAN interfaces on the
Cisco UCS 6200 Series Fabric Interconnects? (Choose three.)
A. FEX port
B. monitoring port
C. Fibre Channel storage port
D. uplink Ethernet port
E. server port
Answer: (SHOW ANSWER)

NEW QUESTION: 16
Refer to the exhibit.

```
FI-B(nxos)# show platform software enm internal info vlandb id 311

 vlan_id 311
 ----------
 Designated receiver: Po21
 Membership:
 Po22 Eth1/32 Eth1/20 Po1 Po21 Po30
```

Which two statements about the fabric interconnect are true? (Choose two.)
A. The fabric interconnect forwards broadcasts on VLAN 311 only when they are received on Po21.
B. All multicast traffic from a blade on VLAN 311 goes out of Po21.
C. IGMP join packets from blades on VLAN 311 goes out Po21.
D. Without any changes to the switch, eth 1/32 could become the designated receiver for
VLAN 311.
E. The fabric interconnect forwards all broadcast packets on VLAN 311 out of each interface listed in the Membership.
Answer: (SHOW ANSWER)

Valid 300-175 Dumps shared by EduDump.com for Helping Passing 300-175 Exam! EduDump.com now offer the **newest 300-175 exam dumps**, the EduDump.com 300-175 exam **questions have been updated** and **answers have been corrected** get the **newest** EduDump.com 300-175 dumps with Test Engine here:
https://www.edudump.com/exams/Cisco/300-175/premium/ (**175** Q&As Dumps, **35%OFF** **Special Discount Code:** **freecram**)

NEW QUESTION: 17
Under which condition can you select the option to "remove" a blade server from within the

Cisco UCS Manager?

A. The server has been physically removed before decommission.

B. The server has been sent a diagnostic interrupt.

C. The server has been powered down.

D. The server has been decommissioned before physical removal.

Answer: (SHOW ANSWER)

NEW QUESTION: 18

HOTSPOT



Answer:




NEW QUESTION: 19
Which component is unsupported by the UEFI boot device in the Cisco UCS C-series standalone?
A. FlexFlash card
B. PCI SSD
C. FCoE
D. USB
Answer: (SHOW ANSWER)

NEW QUESTION: 20
Where would you disable or enable Cisco Discovery Protocol?
A. LAN connectivity policy
B. network control policy
C. service profile
D. LAN uplinks manager
Answer: (SHOW ANSWER)

NEW QUESTION: 21
Which statement about Adapter FEX is true?
A. Adapter FEX extends the fabric down to the VM.
B. Adapter FEX extends the fabric down to the FEX port.
C. Adapter FEX extends the fabric into the server.
D. Adapter FEX extends the fabric into the hypervisor.
Answer: (SHOW ANSWER)

NEW QUESTION: 22
HOTSPOT

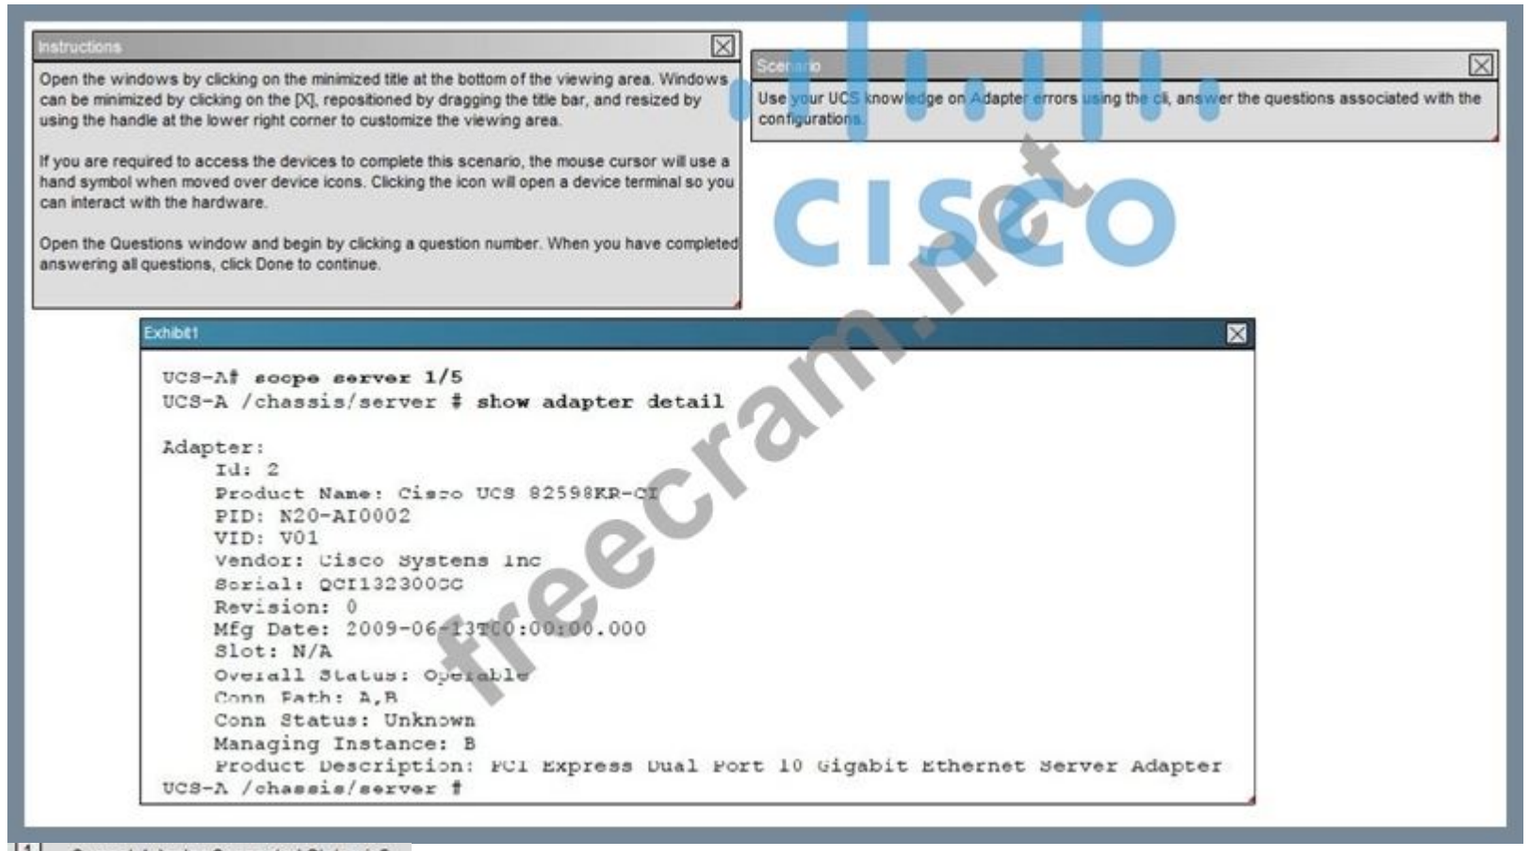



Answer:



NEW QUESTION: 23

Which consideration must be made while performing backup operations within the Cisco UCS Manager?

A. Rerunning an existing backup operation overwrites the existing backup file.

B. A user can perform incremental backups of a system configuration.

C. Scheduled backups are not available.

D. Each backup destination can have multiple backup operations.

Answer: (SHOW ANSWER)

NEW QUESTION: 24

Which two factors determine the recommended maximum number of virtual interfaces on a
Cisco UCS system? (Choose two.)
A. the number of interfaces sharing the uplinks
B. the driver version on the OS running on the compute blade
C. the number of compute blades in the system
D. the number of uplinks between I/O Module and Fabric Interconnect
Answer: (SHOW ANSWER)

NEW QUESTION: 25
Which option describes the possible result of a customer configuring a server pool that contains Cisco UCS B200 M2 and B250 M2 blades?
A. You must uncheck the Restrict Migration box in the service profile to allow service profile migration between blades in the server pool.
B. After service profile migration, the server fails in boot from SAN due to differences in PCI device IDs.
C. A service profile cannot migrate automatically from one blade to another blade within the server pool due to hardware failure.
D. You must decommission a blade server for the associated service profile to migrate to another blade in the server pool successfully.
Answer: (SHOW ANSWER)

NEW QUESTION: 26
A server discovery policy is defined in Cisco UCS Manager.
Which two actions are initiated by the policy when a new server starts? (Choose two.)
A. A service profile is created for the server with the identity burned into the server at time of manufacture.
B. The server is assigned to the selected organization, if configured.
C. The scrub policy is applied to the server, if configured.
D. The qualification in the server discovery policy is executed against the server.
E. The inventory of the server is analyzed.
Answer: (SHOW ANSWER)

NEW QUESTION: 27
Refer to the exhibit.

Table 1 1 - Fabric uplink interface active	All the HIF ports are pinned to the active uplink interface
Table 2 2 - Fabric uplink interfaces active	HIF Ports : 1,2,3,4 to uplink interface 1 HIF Ports: 5,6,7,8 to uplink interface 2
Table 3 4 - Fabric uplink interfaces active	HIF Ports: 1,8 to uplink interface 1 HIF Ports: 2,3 to uplink interface 2 HIF Ports: 6,7 to uplink interface 3 HIF Ports: 4,5 to uplink interface 4
Table 4 8 – Fabric uplink interfaces active	HIV Port: 1 to uplink interface 1 HIV Port: 2 to uplink interface 2 HIV Port: 3 to uplink interface 3 HIV Port: 4 to uplink interface 4 HIV Port: 5 to uplink interface 5 HIV Port: 6 to uplink interface 6 HIV Port: 7 to uplink interface 7 HIV Port: 8 to uplink interface 8

Which tables correctly map the HIF ports to active FEX NIF ports on a Cisco UCS 2208X IOM in discrete pinning mode?

A. Table 2 and Table 4

B. Table 1 and T able 4

C. Table 2 and Table 3

D. Table 1 and Table 2

E. Table 3 and Table 4

Answer: (SHOW ANSWER)

Reference:

http://www.cisco.com/c/en/us/td/docs/unified_computing/ucs/ts/guide/UCSTroubleshooting/

UCSTr oubleshooting_chapter_01001.html

NEW QUESTION: 28

Which two statements are true concerning the role-based access control specifics of a

Cisco Unified Computing System? (Choose two.)

A. By default, user accounts expire after 90 days; a warning message will he generated 10 days prior to expiration.

B. A locally authenticated user account is any user account that is authenticated through

LDAP, RADIUS. or TACACS+.

C. All roles include read access to all configuration settings in the Cisco Unfiled Computing

System domain.

D. A user that is assigned one or more roles will be allowed the privileges that are consistent across all of the assigned roles.

E. If a user maintains a local user account and a remote user account simultaneously, the roles that are defined in the local user account override those that are maintained in the remote user account.

Answer: (SHOW ANSWER)

NEW QUESTION: 29
Which two constructs allow for configuration of VLANs on specific uplink ports? (Choose two.)
A. LAN pin group
B. adapter policies
C. vNIC templates
D. VLAN manager
E. link profiles
F. VLAN groups
Answer: (SHOW ANSWER)
Reference:
http://www.cisco.com/c/en/us/td/docs/unified_computing/ucs/sw/gui/config/guide/1-0-2/b_GUI_Config_Guide/GUI_Config_Guide_chapter17.html
http://www.cisco.com/c/en/us/td/docs/unified_computing/ucs/sw/gui/config/guide/1-0-2/b_GUI_Config_Guide/GUI_Config_Guide_chapter14.html

NEW QUESTION: 30
Scenario
In this scenario, you will refer to screenshots about Cisco UCS B-Series servers and UCS
Manager.
Instructions
To access the multiple-choice questions, click on the numbered boxes on the left of the top panel.
There are four multiple-choice questions with this task.
Be sure to answer all four questions before selecting the Next button.

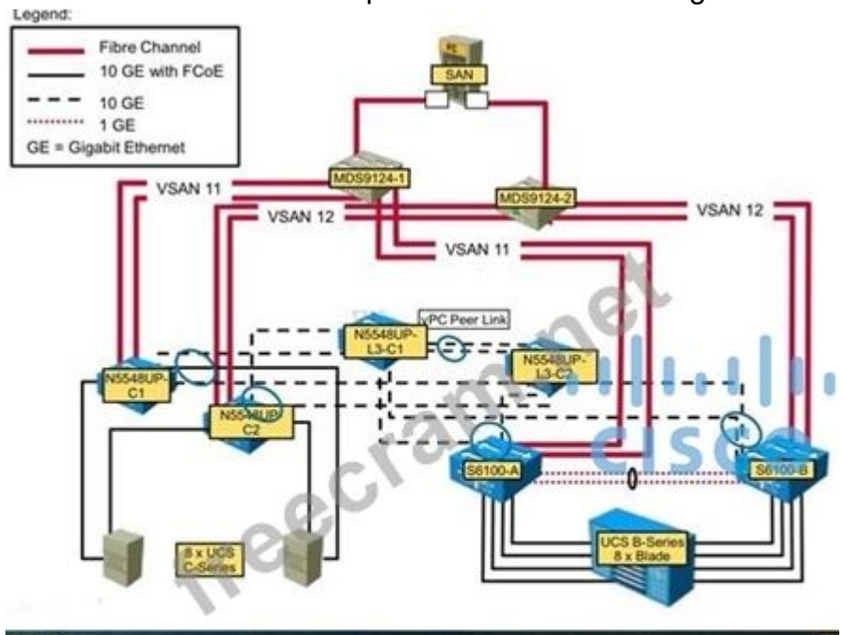


Exhibit2
```
interface Vethernet749
  description server 1/1, VNIC vNIC0
  switchport mode trunk
  untagged cos 4
  no pinning server sticky
  pinning server pinning-failure link-down
```

Exhibit3


Policies
root
Adapter Policies
BIOS Defaults
BIOS Policies
Boot Policies
Host Firmware Packages
IPMI Access Profiles
Local Disk Config Policies
Maintenance Policies
Management Firmware Packages
Memory Policy
Power Control Policies
Scrub Policies
Serial over LAN Policies
Server Pool Policies
Server Pool Policy Qualifications
Threshold Policies
iSCSI Authentication Profiles
vNIC/vHBA Placement Policies
Sub-Organizations



Refer to the Exhibit 2 screenshot of the NX-OS shell CLI in UCS Manager. What LAN policy correlates with the line "pinning server pinning-failure link-down"?

A. Dynamic vNIC Connection
B. Link Protocol
C. Flow Control
D. Network Control
Answer: (SHOW ANSWER)
Reference: http://www.cisco.com/c/en/us/support/docs/servers-unified-computing/ucs-5100-seriesblade-server-chassis/116075-ucs-app-connectivity-tshoot-00.html
http://www.cisco.com/c/en/us/td/docs/unified_computing/ucs/sw/gui/config/guide/2-2/b_UCSM_GUI_Configuration_Guide_2_2/b_UCSM_GUI_Configuration_Guide_2_2_cha pter_010101.html#concept_80DD753607A0427A9874F278E172F2FA

NEW QUESTION: 31
Which option does UEFI secure boot provide?
A. certificate verification of the OS
B. checksum verification of the OS
C. checksum verification of the EFI shell
D. certificate verification of the EFI shell
Answer: (SHOW ANSWER)


Valid 300-175 Dumps shared by EduDump.com for Helping Passing 300-175 Exam! EduDump.com now offer the **newest 300-175 exam dumps**, the EduDump.com 300-175 exam **questions have been updated** and **answers have been corrected** get the **newest** EduDump.com 300-175 dumps with Test Engine here:
https://www.edudump.com/exams/Cisco/300-175/premium/ (**175** Q&As Dumps, **35%OFF** **Special Discount Code:** **freecram**)

NEW QUESTION: 32
Which three items represent message formats that are available to send fault data using
Cisco Call Home? (Choose three.)
A. HTML
B. short text
C. XML
D. long text
E. SOAP API
F. Java
Answer: (SHOW ANSWER)

NEW QUESTION: 33
After an admin configures a service profile template and associates it to the blade, the admin notices that changes to the template are not automatically pushed to profiles that are inheriting that template. The service profile template and vNIC templates are set to "initial".
Which two actions resolve this issue? (Choose two.)
A. Change the type of the vNIC template from "initial" to "updating".
B. Delete the service profile template and re-create it as an updating template.
C. Delete the vNIC template and re-create it as an updating template.
D. Change the type of the service profile template from "initial" to "updating".
E. Delete and recreate all templates.
Answer: (SHOW ANSWER)

NEW QUESTION: 34
When upgrading a standalone Cisco UCS C-Series server, which method is correct?
A. direct upgrade on all components
B. Cisco Hardware Upgrade Utility
C. Cisco Server Upgrade Utility
D. Cisco Host Upgrade Utility
Answer: (SHOW ANSWER)

NEW QUESTION: 35
HOTSPOT

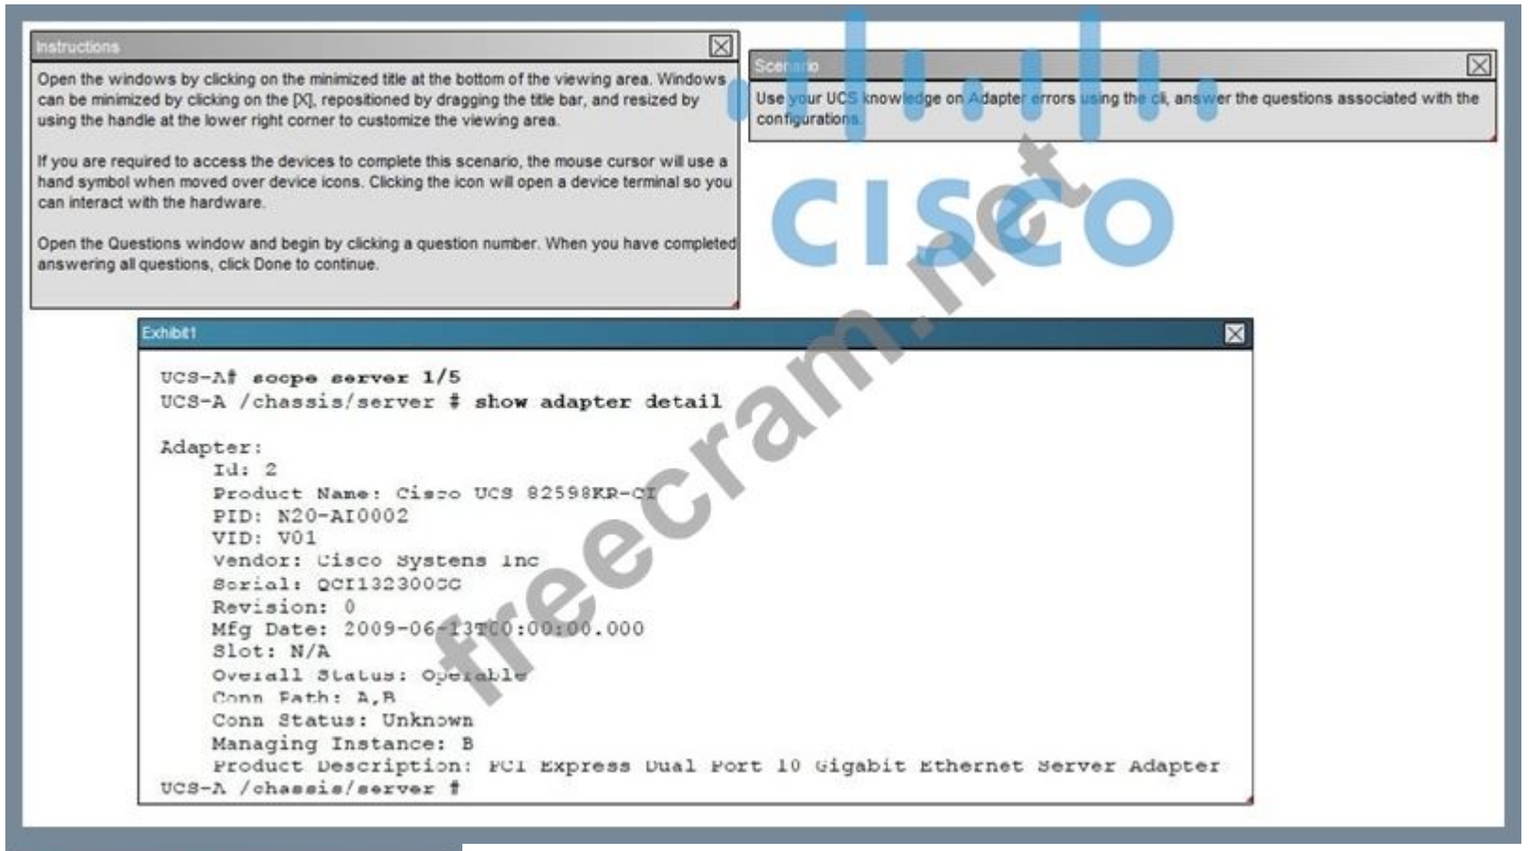

Answer:



NEW QUESTION: 36

An administrator is required to configure a policy in Cisco UCS to schedule backups.

Which two backup types can be scheduled? (Choose two.)

A. full state

B. import configuration

C. system configuration

D. logical configuration

E. all configuration

Answer: (SHOW ANSWER)

NEW QUESTION: 37
In order to manually boot from the FlexFlash SD card, which boot option must be in the boot policy used in the service profile?
A. SD card
B. remote virtual drive
C. remote boot
D. FlexFlash state
Answer: (SHOW ANSWER)

NEW QUESTION: 38
Which option describes what Cisco Integrated Management Controller Network Security provides?
A. user-configured ACLs to block known bad servers from accessing the Cisco IMC
B. 802.1x support, allowing the Cisco IMC to log in to a port security network
C. a whilelist that specifies the servers allowed to access the Cisco IMC
D. protection against DDoS on the Cisco IMC
Answer: (SHOW ANSWER)


NEW QUESTION: 39
You need to configure service profiles for a Cisco UCS system.
What is an advantage of using the Expert wizard to create the service profiles instead of using the Simple wizard?
A. Both wizards support the same features, but the Expert wizard provides no configuration options for the features.
B. Only the Expert wizard supports Fabric Interconnect expansion module ports to beused in 10-Gigabit uplink mode or Fibre Channel mode.
C. The Expert wizard supports all blade generations, whereas the Simple wizard supports only M1 blades, M2 blades, and Cisco VIC cards.
D. The Expert wizard supports stateless computing and mobile service profiles.
Answer: (SHOW ANSWER)

NEW QUESTION: 40
Which two options are valid server pool policy qualifications? (Choose two.)
A. power group
B. description
C. user label
D. server model
Answer: (SHOW ANSWER)

NEW QUESTION: 41
Which two statements about Cisco VM-FEX dynamic vNIC configuration and provisioning by using the Cisco UCS Manager are true? (Choose two.)
A. Dynamic vNIC parameters are configured by using SNMP.
B. Dynamic vNIC parameters must be configured manually before the virtual machine connects to its port group.
C. Dynamic vNIC parameters are configured dynamically after the assigned virtual machine connects to the port group.
D. Dynamic vNIC parameters are enabled by using the Fibre Channel Forwarder protocol.

E. Dynamic vNIC parameters are configured by inheriting the port-group parameters of the associated virtual machines.
Answer: (SHOW ANSWER)
Reference:
http://www.cisco.com/en/US/docs/switches/datacenter/nexus5000/sw/mkt_ops_guides/513
_n1_1/ n5k_ops_vmfex.pdf

NEW QUESTION: 42
View the Exhibit.

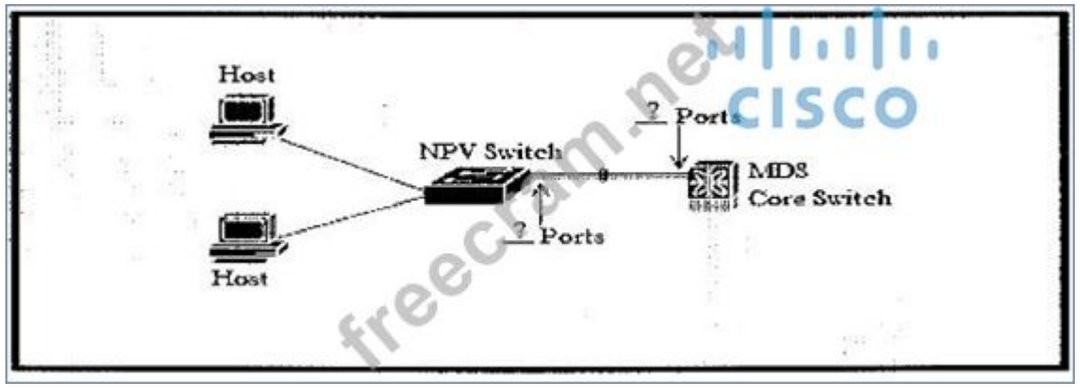

Refer to the exhibit. An engineer is implementing a new network design that includes a port channel to connect an MDS core switch and an NPV switch.
Which two Fibre Channel port types must be used to create the Fibre Channel port channel? (Choose two.)
A. E Port
B. F Port
C. TL Port
D. NP Port
E. NL Port
F. N Port
Answer: (SHOW ANSWER)

NEW QUESTION: 43
Which two statements about the provisioning of Cisco VM-FEX DirectPath I/O mode are true?
(Choose two.)
A. The VT-D feature on the ESX host server must be disabled before you can enable
VMDirectPath.
B. VM-FEX standard mode is the same as VM-FEX high-performance mode.
C. Enabling high performance turns on VMDirectPath mode.
D. VMDirectPath mode prevents the use of VMware vMotion.
E. To use Cisco VM-FEX DirectPath I/O mode, a virtual machine must have a dynamic vNIC and two static vNICs on the VIC adapter.
Answer: (SHOW ANSWER)
Reference: http://www.cisco.com/c/en/us/solutions/collateral/data-center- virtualization/unifiedcomputing/vm_fex_best_practices_deployment_guide.html

NEW QUESTION: 44


You need to upgrade the firmware on 15 Cisco UCS C-Series Rack Servers. Ten of the servers are integrated in a Cisco UCS cluster, and the other five servers are used in standalone mode. The Cisco UCS C-Series Rack-Mount Server Software Bundle is available.
Which set of statements about the upgrade process is true?
A. You can upgrade the firmware on all of the Cisco UCS C-Series Rack Servers by using the Cisco UCS C-Series Rack-Mount Standalone Server Software. You can upgrade the 10 servers that are integrated in a Cisco UCS cluster in Cisco UCS Manager, and you can upgrade the five standalone servers one by one.
B. First, you must integrate the standalone servers into the Cisco UCS system. Then, you can upgrade the firmware on all 15 servers from Cisco UCS Manager. Finally, you can revert the five servers to standalone mode.
C. You cannot upgrade the firmware on the servers in standalone mode. You must cluster the servers first over LAN or via cluster interfaces. After the firmware upgrade, you can revert the five servers to standalone mode.
D. You cannot use the Cisco UCS C-Series Rack-Mount Server Software Bundle with
Cisco UCS C-Series Servers in standalone mode. You must download and use the Cisco
UCS C-Series Rack-Mount Standalone Server Software package.
Answer: (SHOW ANSWER)

NEW QUESTION: 45
How many links are there between a second-generation IOM (Cisco UCS 2204 or 2208) and a third-generation half-width blade (Cisco UCS B200 M3 or B22 M3) in a Cisco UCS system?
A. 8
B. 4
C. 2
D. 1
Answer: (SHOW ANSWER)

NEW QUESTION: 46
Which three statements about what occurs when a Cisco UCS -Series Blade Server connects to the SAN across a fabric interconnect that is enabled in Fibre Channel NPV mode are true?
(Choose three.)
A. The server ports in F Port mode are pinned to the NP Ports.
B. Traffic that is received on the server ports in F Port mode from the server side is pinned to the
NPIV-enabled uplink ports on the fabric interconnect.
C. The E Ports are pinned to the E Ports on the fabric interconnect.
D. Zoning is deployed on the fabric interconnect.
E. The fabric interconnect must have the Fibre Channel uplink port connected to the upstream switch
F Port in NPIV mode that performs the Fibre Channel forwarder function.
F. The fabric interconnect is not assigned a Fibre Channel domain ID.
Answer: (SHOW ANSWER)

Valid 300-175 Dumps shared by EduDump.com for Helping Passing 300-175 Exam! EduDump.com now offer the **newest 300-175 exam dumps**, the EduDump.com 300-175 exam **questions have been updated** and **answers have been corrected** get the **newest** EduDump.com 300-175 dumps with Test Engine here:
https://www.edudump.com/exams/Cisco/300-175/premium/ (**175** Q&As Dumps, **35%OFF** **Special Discount Code:** **freecram**)

NEW QUESTION: 47
Scenario
In this scenario, you will refer to screenshots about Cisco UCS B-Series servers and UCS
Manager.
Instructions
To access the multiple-choice questions, click on the numbered boxes on the left of the top panel.
There are four multiple-choice questions with this task.
Be sure to answer all four questions before selecting the Next button.

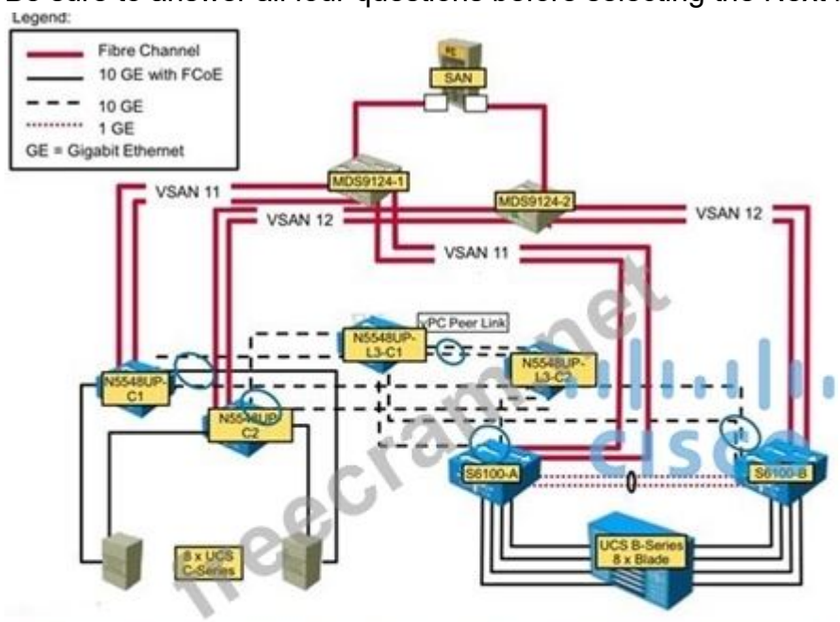

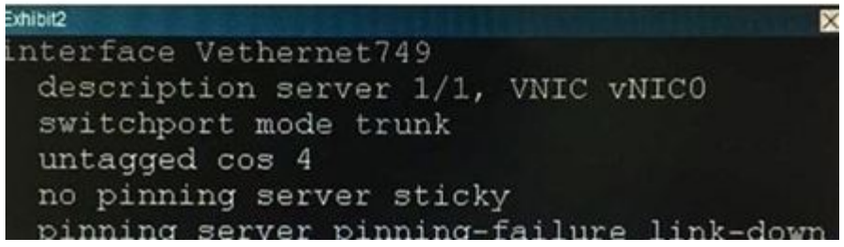

Exhibit2
```
interface Vethernet749
  description server 1/1, VNIC vNIC0
  switchport mode trunk
  untagged cos 4
  no pinning server sticky
  pinning server pinning-failure link-down
```

Exhibit3


Policies
root
Adapter Policies
BIOS Defaults
BIOS Policies
Boot Policies
Host Firmware Packages
IPMI Access Profiles
Local Disk Config Policies
Maintenance Policies
Management Firmware Packages
Memory Policy
Power Control Policies
Scrub Policies
Serial over LAN Policies
Server Pool Policies
Server Pool Policy Qualifications
Threshold Policies
iSCSI Authentication Profiles
vNIC/vHBA Placement Policies
Sub-Organizations




Refer to the Exhibit 4 screenshot of the UCS Manager. Which item can only be configured in the Storage Cloud?

A. iQN Pools
B. Storage FC Clinks
C. Port Channels
D. VSANs
E. Zoning
Answer: (SHOW ANSWER)
Reference: http://www.cisco.com/c/en/us/support/docs/servers-unified-computing/ucsinfrastructure-ucs-manager-software/116082-config-ucs-das-00.html

NEW QUESTION: 48
You manage Cisco UCS -Series Rack-Mount Servers. Which three components can you upgrade by using the Cisco Host Upgrade Utility? (Choose three.)
A. the LAN on motherboard
B. the Cisco Integrated Management Controller
C. the operating system images
D. the system BIOS
E. the fabric interconnects
F. the FEX modules
Answer: (SHOW ANSWER)
Reference: http://www.cisco.com/c/en/us/td/docs/unified_computing/ucs/c/sw/lomug/2-

0x/b_huu_2_0_3/b_huu_2_0_3_chapter_01.html


NEW QUESTION: 49
View the Exhibit.

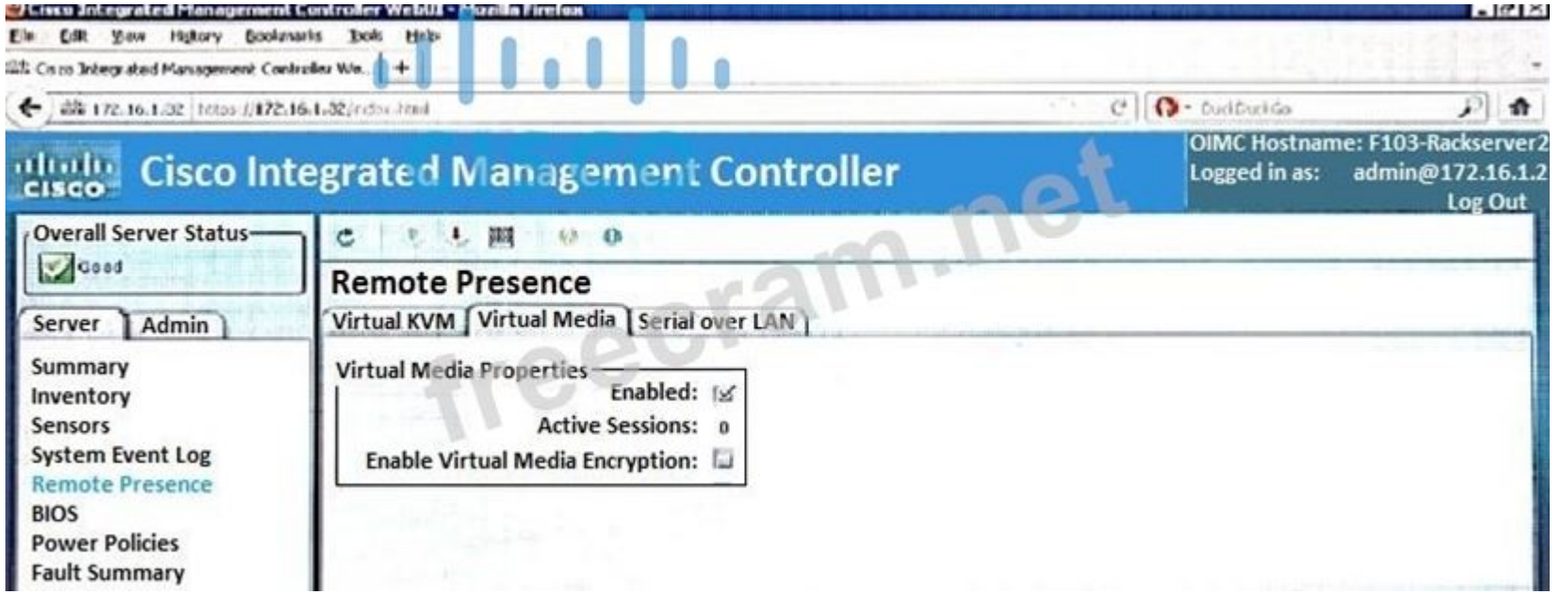


Refer to the exhibit. Which two media types can you mount from the KVM console? (Choose two.)
A. IMG
B. VMDK
C. VHDx
D. ISO
E. VHD
Answer: (SHOW ANSWER)

NEW QUESTION: 50
Which three options are needed when configuring local zoning on the Cisco UCS Fabric Interconnects? (Choose three.)
A. FC target endpoints
B. iSCSI target endpoints
C. SAN connectivity policy
D. storage connection policy
E. The fabric interconnects are operating in FC end-host mode.
F. The fabric interconnects are operating in FC switching mode.
Answer: (SHOW ANSWER)

NEW QUESTION: 51
DRAG DROP

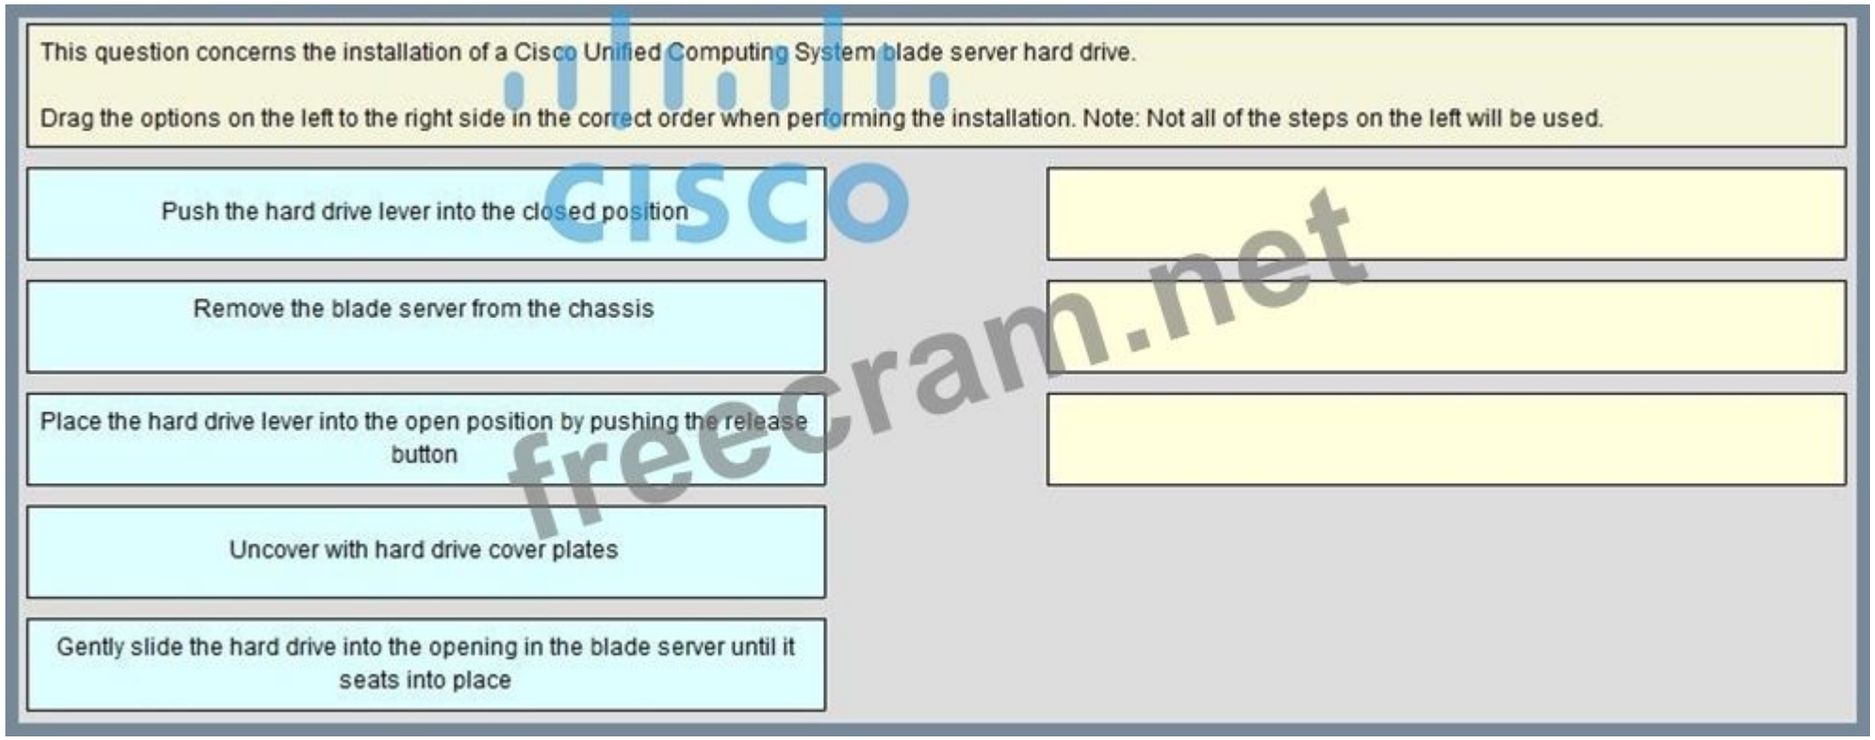

Answer:

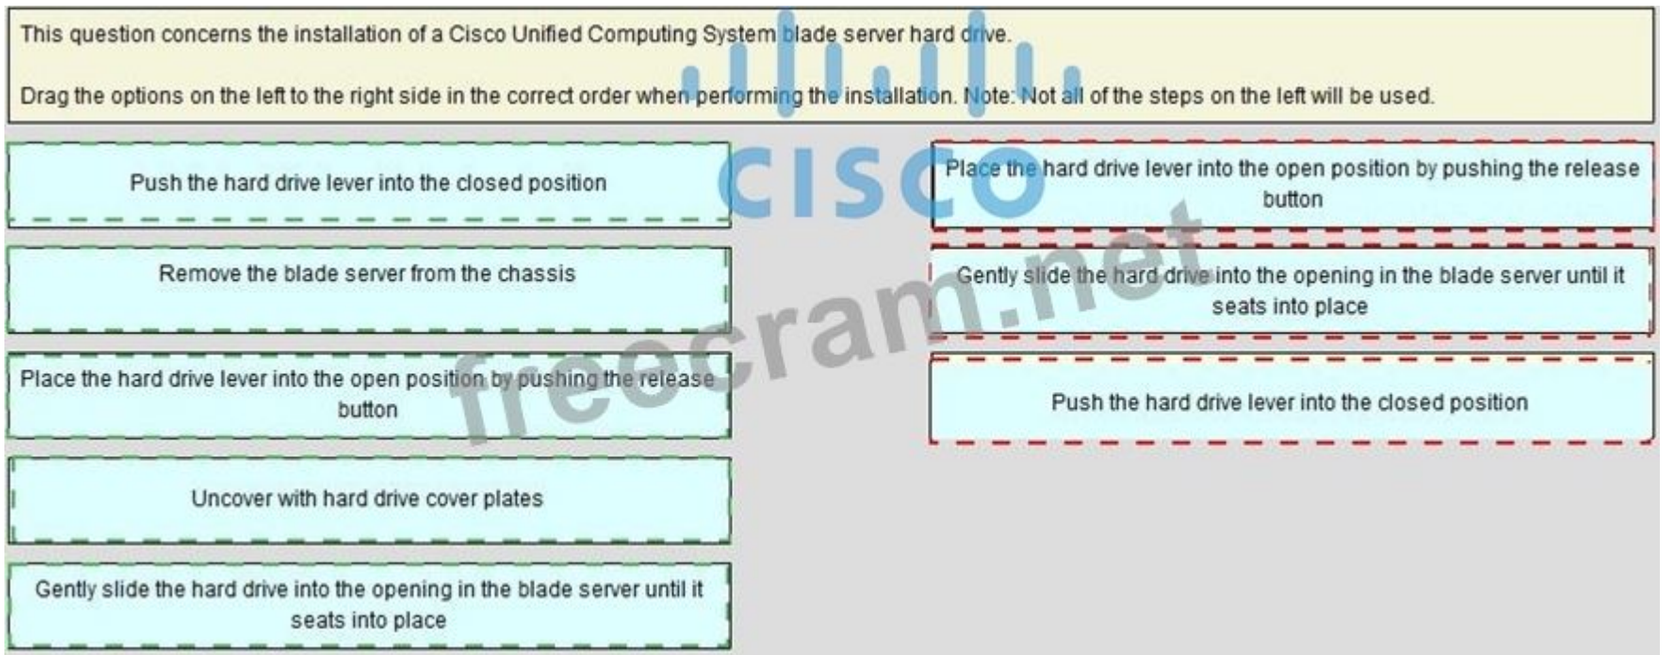

NEW QUESTION: 52

Which scheduling option sets the number of tasks that can be run?

A. max number of tasks

B. max number of concurrent tasks

C. max configuration requests

D. max changes


Answer: (SHOW ANSWER)

NEW QUESTION: 53
When implementing a Cisco UCS C-series standalone server, which of the following Cisco
Integrated Management Controller NIC modes allow use of the least number of physical ports while providing maximum levels of redundancy?
A. shared LOM
B. Cisco VIC
C. dedicated
D. shared LOM 10G
Answer: (SHOW ANSWER)

NEW QUESTION: 54
With Cisco UCS Manager, in which location do you monitor the chassis discovery process?
A. CMC
B. FSM
C. CDP
D. DME
Answer: (SHOW ANSWER)
Reference:
http://www.cisco.com/c/en/us/td/docs/unified_computing/ucs/sw/gui/config/guide/20/b_UCS
M_GUI_Configuration_Guide_2_0/b_UCSM_GUI_Configuration_Guide_2_0_chapter_01
00011.html

NEW QUESTION: 55
Which of the following supports more than two component-resident versions of firmware?
A. I/O modules
B. Cisco UCS fabric interconnects
C. mezzanine adapters
D. CIMCs
Answer: (SHOW ANSWER)

NEW QUESTION: 56
View the Exhibit.

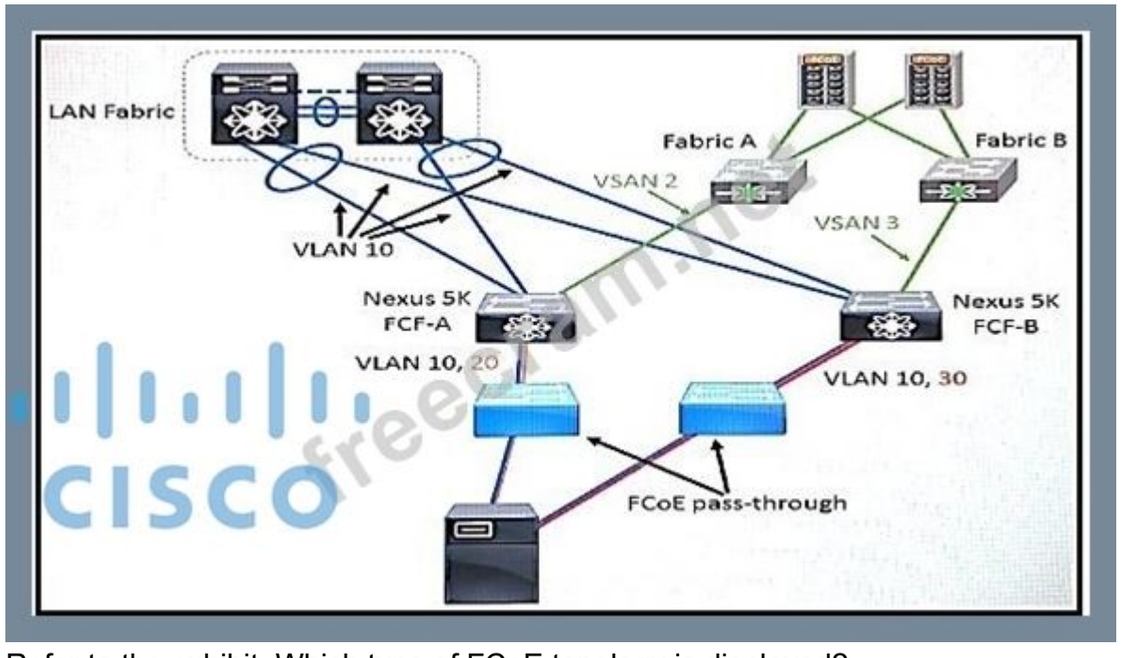

Refer to the exhibit. Which type of FCoE topology is displayed?

A. direct-attach

B. remote-attach

C. vPC

D. FCoE with Cisco 2232 Fabric Extenders

Answer: (SHOW ANSWER)

NEW QUESTION: 57

In an environment where multiple LDAP servers are used for user authentication, which Cisco UCS Manager feature must be configured?

A. LDAP Provider Group

B. Authentication Domain

C. Organization

D. LDAP Locale

Answer: (SHOW ANSWER)

NEW QUESTION: 58

Which statement about the purpose of a storage connection policy in Cisco UCS Manager is true?

A. It defines how zoning is configured for initiators and targets on the fabric interconnect.

B. It sets a minimum baseline of requirements for when vHBAs are configured in a service profile.


C. It sets a minimum baseline of requirements for when storage devices connect to the fabric interconnects.

D. It defines the number of storage connections that are allowed to connect to the fabric interconnects.

Answer: (SHOW ANSWER)

NEW QUESTION: 59

Refer to the exhibit.

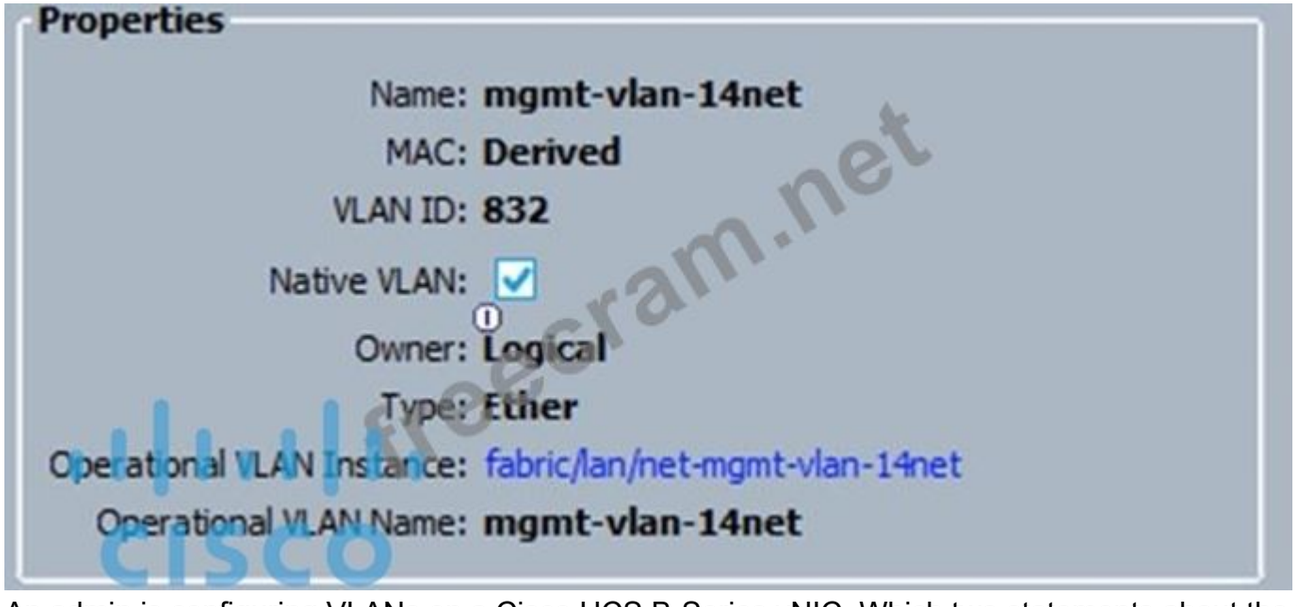

An admin is configuring VLANs on a Cisco UCS B-Series vNIC. Which two statements about the traffic coming from the operating system with this configuration are true? (Choose two.)

A. If traffic comes in untagged on this vNIC, it is placed in VLAN 832.

B. The uplink ports of the fabric interconnect have the native VLAN set to ID 832.

C. The VLAN must be configured with ID 832 within the operating system.

D. This configuration is not supported when hypervisors are used.

E. No VLAN tag should be added in the operating system.

Answer: A,E (LEAVE A REPLY)

NEW QUESTION: 60

Which three statements about default settings for fabric interconnect uplink ports are true? (Choose three.)

A. Specific VLANs are trunked on specific uplinks.

B. Cisco Discovery Protocol is enabled.

C. UDLD is enabled.

D. Cisco Discovery Protocol is disabled.

E. UDLD is disabled.

F. When a VLAN is configured, it is trunked on all uplinks.

G. They connect to the I/O modules.

Answer: (SHOW ANSWER)

NEW QUESTION: 61

You configure a service profile template from the Cisco UCS Manager GUI by using the
Create Local Disk Configuration Policy option The No RAID local disk policy mode is selected and the Protect Configuration property is disabled. You create a service profile that is created from the service profile template. You apply the service profile to a server that has an operating system installed on a RAID-10 volume. Which statement about the server after it is associated to the service profile is true?

A. The server has RAID-0 configured on the local disk.

B. The server has the local storage detached.

C. The server has RAID-1 configured on the local disk.
D. The local disk of the server remains RAID-10.
Answer: (SHOW ANSWER)

Valid 300-175 Dumps shared by EduDump.com for Helping Passing 300-175 Exam! EduDump.com now offer the **newest 300-175 exam dumps**, the EduDump.com 300-175 exam **questions have been updated** and **answers have been corrected** get the **newest** EduDump.com 300-175 dumps with Test Engine here: https://www.edudump.com/exams/Cisco/300-175/premium/ (**175** Q&As Dumps, **35%OFF** **Special Discount Code:** **freecram**)

NEW QUESTION: 62
Which two elements are defined in a dynamic vNIC connection policy? (Choose two.)
A. network control policy
B. QoS policy
C. number of dynamic vNICs
D. adapter policy
E. jumbo frame size
Answer: (SHOW ANSWER)

NEW QUESTION: 63
Which authentication provider requires a custom attribute?
A. TACACS+
B. RADIUS
C. LDAP
D. local authentication
Answer: (SHOW ANSWER)
Reference:
http://www.cisco.com/en/US/docs/unified_computing/ucs/sw/gui/config/guide/141/UCSM_G
UI_Co nfiguration_Guide_141_chapter7.html

NEW QUESTION: 64
How does a dynamic vNIC get allocated?
A. Dynamic vNICs can only be bound to the service profile through an updating template.
B. Dynamic vNICs are bound directly to a service profile.
C. Dynamic vNICs are assigned to VMs in VMware vCenter.
D. Dynamic vNICs are assigned by binding a port profile to the service profile.
Answer: (SHOW ANSWER)

NEW QUESTION: 65
You need to install a Windows Server operating system that has MPIO enabled, to optimize connectivity with storage arrays.
What is a valid prerequisite to perform this task?

A. If there are multiple paths that are configured to the boot LUN, all of these paths must be enabled when the LUN is installed.
B. If there are multiple paths that are configured to the boot LUN, only one path must be enabled when the LUN is installed.
C. iSCSI multipathing must be enabled on all of the vNICs and the physical adapters in the iSCSI initiator IP pools.
D. iSCSI multipathing must be disabled during the installation and re-enabled after MPIO is enabled on the host.
Answer: (SHOW ANSWER)

NEW QUESTION: 66
Which two prerequisites are required to configure a SAN boot from the iSCSI storage of a
Cisco UCS system? (Choose two.)
A. There must be FCIP connectivity between the Cisco UCS domain and the boot target storage.
B. There must be IP connectivity between the Cisco UCS domain and the boot target storage.
C. The operating system to boot must be an iSCSI initiator and must he target-capable.
D. The operating system to boot must be iBFT-capable.
E. There must be a group of IP addresses that is associated with the WWN pool.
Answer: (SHOW ANSWER)

NEW QUESTION: 67
Which consideration must be made when utilizing a WWxN pool?
A. Only HBA templates can use WWxN pools.
B. A SAN connectivity policy must be used.
C. WWNN assignment must be set to derived.
D. WWPN assignment must be set to derived.
Answer: D (LEAVE A REPLY)

NEW QUESTION: 68
Which item describes the failure scenario called a "split-brain" in the Cisco Unified
Computing System?
A. failure of a Cisco Unified Computing System Chassis Management Controller
B. failure of a Cisco Unified Computing System Fabric Interconnect
C. failure of the Cisco Unified Computing System L1-L2 network
D. failure of a Cisco Unified Computing System I/O module
E. failure of a Cisco Unified Computing System Chassis Management Switch
Answer: (SHOW ANSWER)

NEW QUESTION: 69
What is the purpose of the maximum ports that are filed in the port profile?
A. determines the maximum number of DVSs that can use the port profile
B. determines the maximum number of VMs that can use the DVS
C. determines the maximum number of uplinks that VMs can use
D. determines the maximum number of dynamic vNICS on the DVS
Answer: D (LEAVE A REPLY)

NEW QUESTION: 70
Which two statements about Call Home are true? (Choose two.)
A. In a cluster configuration, at least one fabric interconnect must have IP connectivity.
B. Call Home requires SCP to transfer the files securely.
C. The fabric interconnect must have IP connectivity to email server or the destination HTTP server
D. At least one destination profile must be configured.
E. The virtual IP address of the Cisco UCS Manager in a cluster is the source of the email.
Answer: (SHOW ANSWER)

NEW QUESTION: 71
What is a true statement concerning automatic Fibre Channel pinning on a Cisco Unified
Computing System 62XX Fabric Interconnect?
A. By default, uplink Fibre Channel interfaces are configured for VSAN trunking.
B. With VSAN trunking, the automatic pinning of server traffic to Fibre Channel uplink ports will be based on the server WWN.
C. The Fibre Channel pinning process is implemented differently than end-host MAC address pinning.
D. Using NPV, each downstream server will be pinned to an uplink port that is based on a
PIN group.
Answer: B (LEAVE A REPLY)

NEW QUESTION: 72
After staging a VEM file on a VMware ESXi 5.0 host in the /tmp directory, what is the correct command syntax to install the VEM?
A. esxcli software vib install -d /tmp/VEM500-20110825132140-BG-release.zip
-maintenance-mode
B. esxupdate software vib install -d /tmp/VEM500-20110825132140-BG-release.zip
-maintenance-mode
C. esxcli software vib install -v /tmp/VEM500-20110825132140-BG-release.zip
-maintenance-mode
D. esxupdate software vib install -v /tmp/VEM500-20110825132140-BG-release.vib
-maintenance-mode
Answer: (SHOW ANSWER)

NEW QUESTION: 73
At a customer site, a Cisco UCS cluster must be renamed due to a domain name change
You need to recommend a solution to ensure that Cisco UCS Manager can be accessed over HTTPS.
Which solution accomplishes this goal?
A. A default key ring certificate regeneration request must be issued from Cisco UCS
Manager.
B. The default key ring certificate must be regenerated manually.
C. The cluster must be reinstalled, in order to generate the default key ring certificate.
D. The default key ring certificate must he renewed automatically when the name changes.

Answer: (SHOW ANSWER)

NEW QUESTION: 74
In a standalone Cisco UCS C-Series server, which recommendations can be used to upgrade the BIOS?
A. Flash ROM Utility
B. EFI Interface
C. USB Flash Utility
D. Cisco Host Upgrade Utility
E. Cisco IMC
F. iFlash32 Utility
G. Cisco UCS Manager
Answer: (SHOW ANSWER)

NEW QUESTION: 75
Which policy is used to specify how Cisco UCS Manager should proceed for configuration changes that will have a service impact?
A. host firmware policy
B. maintenance policy
C. local disk policy
D. BIOS policy
Answer: (SHOW ANSWER)

NEW QUESTION: 76
HOTSPOT

Instructions

Open the windows by clicking on the minimized title at the bottom of the viewing area. Windows can be minimized by clicking on the [-], repositioned by dragging the title bar, and resized by using the handle at the lower right corner to customize the viewing area.

If you are required to access the devices to complete this scenario, the mouse cursor will use a hand symbol when moved over device icons. Click the icon to open a device terminal to interact with the hardware.

Open the **Questions** window and begin by clicking a question number. When you have completed answering all questions, click **Done** to continue.

Scenario

Use your UCS knowledge on Fabric Interconnect Failover to answer the questions associated with the UCS cluster.

Exhibit1

```
UCS-A# show cluster state
Cluster Id: 0xfc436fa8b8851le0-0xa370000573cb6c04

A: UP, PRIMARY
B: UP, SUBORDINATE

HA READY
UCS-A# connect local-mgmt
Cisco Nexus Operating System (NX-OS) Software
TAC support: http://www.cisco.com/tac
Copyright (c) 2002-2011, Cisco Systems, Inc. All rights reserved.
The copyrights to certain works contained in this software are
owned by other third parties and used and distributed under
license. Certain components of this software are licensed under
the GNU General Public License (GPL) version 2.0 or the GNU
Lesser General Public License (LGPL) Version 2.1. A copy of each
such license is available at
http://www.opensource.org/licenses/gpl-2.0.php and
http://www.opensource.org/licenses/lgpl-2.1.php

UCS-A(local-mgmt)# cluster lead b
UCS-A(local-mgmt)#
```

Questions

1
2
3

The connect local-mgmt command is required

- to allow the fabric interconnect to use the force command to be subordinate.
- To allow local management of the cluster to be configured.
- To configure HA on all fabric interconnect .
- To enable the fabric interconnect for a different HA state.

Answer:

Questions

1
2
3

The connect local-mgmt command is required

- to allow the fabric interconnect to use the force command to be subordinate.
- To allow local management of the cluster to be configured.
- To configure HA on all fabric interconnect .
- To enable the fabric interconnect for a different HA state.


Explanation:


freecram.net

to allow local management of the cluster to be configured.


Valid 300-175 Dumps shared by EduDump.com for Helping Passing 300-175 Exam! EduDump.com now offer the **newest 300-175 exam dumps**, the EduDump.com 300-175 exam **questions have been updated** and **answers have been corrected** get the **newest** EduDump.com 300-175 dumps with Test Engine here: https://www.edudump.com/exams/Cisco/300-175/premium/ (**175** Q&As Dumps, **35%OFF Special Discount Code: freecram**)

NEW QUESTION: 77
HOTSPOT

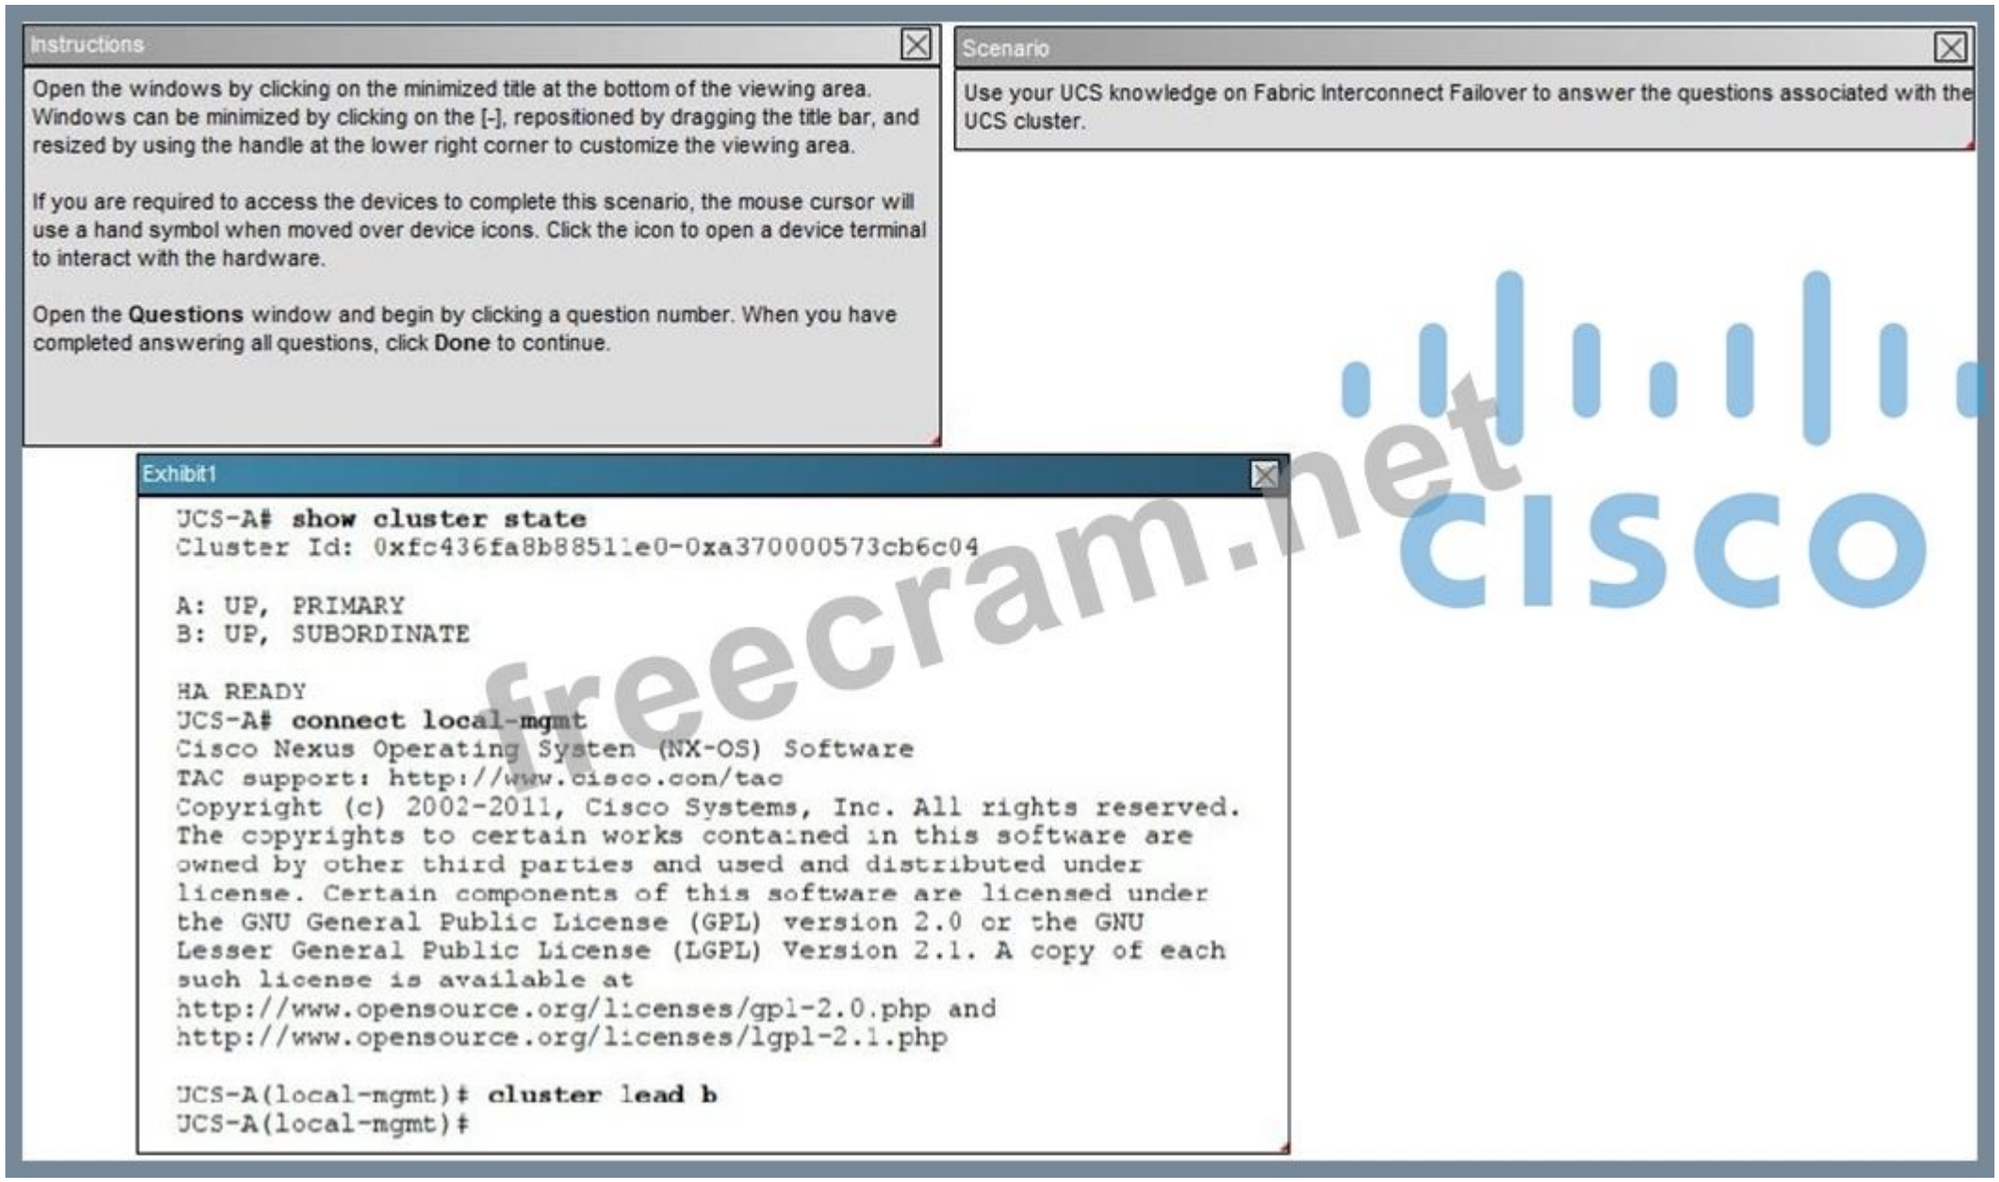

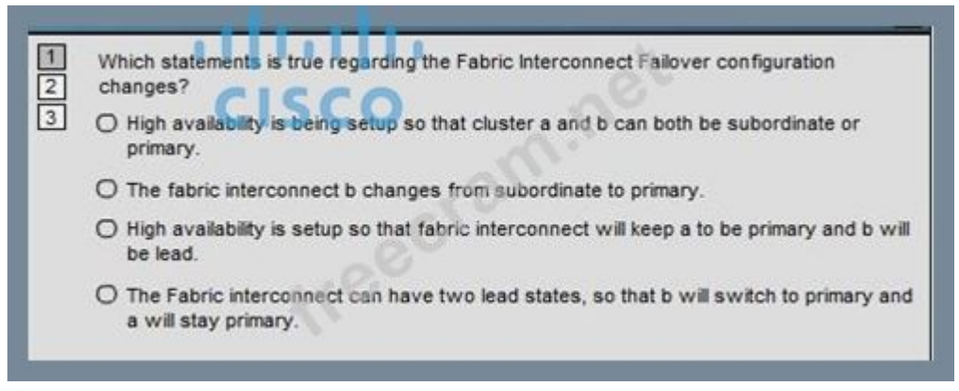

Answer:

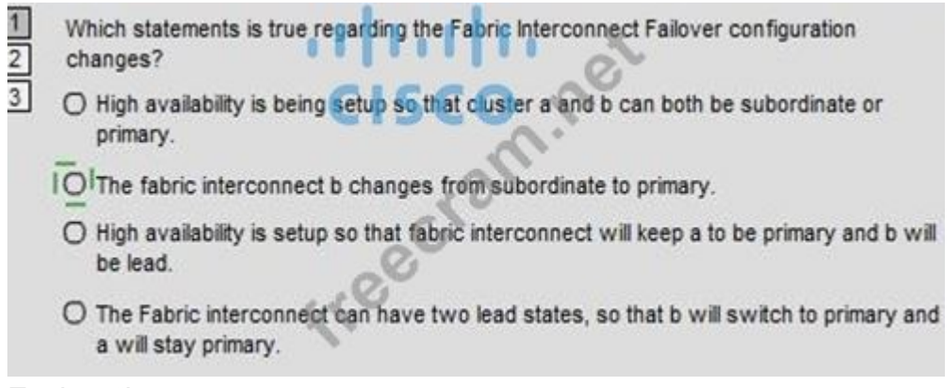

Explanation:

The fabric interconnect b changes from subordinate to primary

NEW QUESTION: 78

How does a Cisco Unified Computing System react when configured for disjoint Layer 2 domains?

A. The VLAN traffic for a disjoint network can only travel along an uplink that is specifically assigned to this VLAN and is selectively excluded from all other uplinks.

B. Automatic pinning is disabled; VLAN membership must be statically pinned to the uplink ports.

C. When you configure disjoint Layer 2 networks, you must assign VLANs to uplink interfaces.

D. VLANs must be divided between the fabric interconnects using PIN groups.

Answer: (SHOW ANSWER)

NEW QUESTION: 79

How many certificates does Cisco Unified Computing System Manager have to export to communicate with VMware vCenter server if the VMware ESXi hosts are all running version 5.0 or higher?

A. 8

B. 1

C. 16

D. 4

E. 2

Answer: (SHOW ANSWER)

NEW QUESTION: 80

Freecram.net

Which two Cisco UCS firmware are contained in the Cisco UCS Infrastructure software bundle? (Choose two.)

A. Cisco UCS BIOS
B. Cisco UCS IMC
C. Cisco UCS adapters
D. Cisco UCS I/O module firmware
E. Cisco UCS fabric interconnects firmware
Answer: (SHOW ANSWER)

NEW QUESTION: 81
Which item represents a secure method of transmitting fault data with Cisco Call Home?
A. RSA Digital Certificate
B. secure XML
C. Cisco Transport Gateway
D. IPsec
Answer: (SHOW ANSWER)


NEW QUESTION: 82
To boot from SAN, you must perform which two configurations on a Cisco UCS system? (Choose two.)
A. Enter the boot LUN and the nWWNs.
B. Put the boot VSANin a dedicated boot service profile template.
C. Create a LUN, and allow the server WWPN to have access to the LUN.
D. Create a dedicated boot VSAN.
E. Put the server WWPN and the storage array WWPN in the same zone.
Answer: (SHOW ANSWER)

NEW QUESTION: 83
Which two statements about the maintenance policy configurations available from the Cisco UCS Manager GUI are true? (Choose two.)
A. A maintenance policy can be defined for the service profile associated to a server and for updating a service profile bound to one or more service profiles.
B. A maintenance policy is used to configure a nondisruptive upgrade of the Cisco UCS Fabric Interconnects.
C. A maintenance policy can defer the direct deployment of firmware images for components that use neither the host firmware nor the management firmware packages available in the Cisco UCS Manager, such as fabric interconnects and IOMs.
D. A maintenance policy can deploy service profile changes immediately, when acknowledged by an admin user or automatically at the time specified in the schedule.
E. A maintenance policy can be used only to apply nondisruptive service profile changes to servers.
Answer: (SHOW ANSWER)

Reference:
http://www.cisco.com/c/en/us/td/docs/unified_computing/ucs/sw/gui/config/guide/20/b_UCSM_GUI_Configuration_Guide_2_0/b_UCSM_GUI_Configuration_Guide_2_0_chapter_011110.html#concept_3735BFD6DA5A49CF90B1B4EEE6BCBF25

NEW QUESTION: 84
Which policy determines what happens to local disks when they are disassociated from a service profile?
A. scrub policy
B. maintenance policy
C. local disk policy
D. BIOS policy
Answer: (SHOW ANSWER)

NEW QUESTION: 85
Refer to the exhibit.

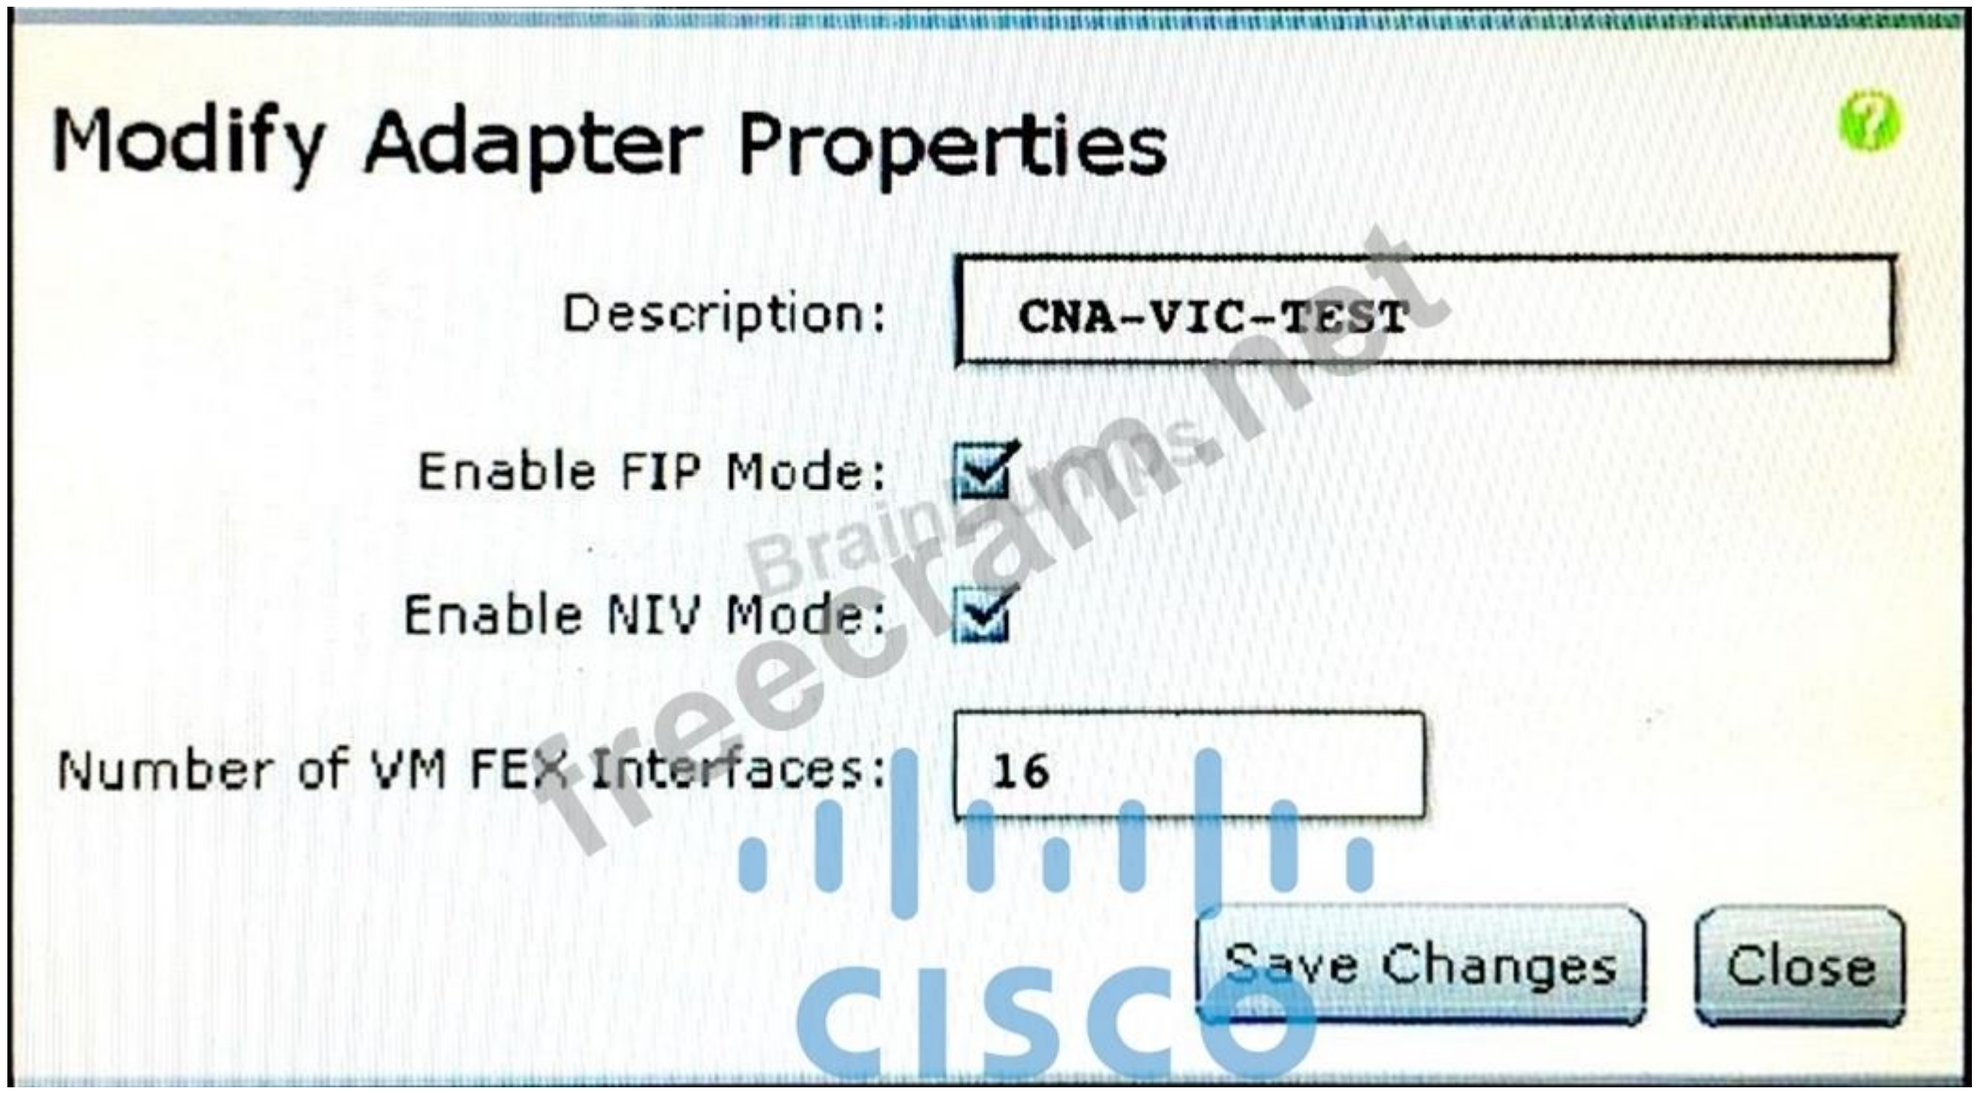


From the Cisco Integrated Management Controller GUI, the Cisco Network Assistant VIC adapter properties of a Cisco UCS -Series Server in standalone mode are configured as shown. Which three options are results of the configuration? (Choose three.)

A. Sixteen dynamic vNICs on the Cisco Network Assistant VIC adapter are provisioned.
B. A description for the Cisco Network Assistant VIC adapter is assigned.
C. Sixteen static vNICs on the Cisco Network Assistant VIC adapter are provisioned.
D. FIP support on the Cisco Network Assistant VIC adapter is enabled.
E. Sixteen dynamic device aliases for vNICs on the Cisco Network Assistant VIC adapter are provisioned.
F. NIV mode for the Cisco Network Assistant VIC adapter is disabled.
Answer: A,B,D (LEAVE A REPLY)
Reference: http://www.cisco.com/c/en/us/support/docs/switches/nexus-5000- seriesswitches/117690-configure-vmfex-00.html

NEW QUESTION: 86
DRAG DROP
Drag and drop the scripting tools on the left to the correct definitions on the right.

Cisco UCS Python SDK	is a module for a widely used, general-purpose, high-level programming language that helps automate and manage configurations within Cisco UCS Manager, including service profiles, policies, pools, equipment, and network and storage management
Cisco UCS PowerTool Suite	provides complete support for Cisco UCS Manager XML API calls, is installed as a VM, and can be used to import and replicate existing Cisco UCS Manager and physical inventory
Cisco UCS Platform Emulator	is a set of PowerShell modules for Cisco UCS Manager, Cisco IMC and Cisco UCS Central that aids in configuration and management of Cisco UCS domains and solutions
Cisco UCS Automation Tool	converts Cisco UCS Manager actions into automation scripts and captures Cisco UCS Manager actions in XML to use in any programming language that has variables

Answer:

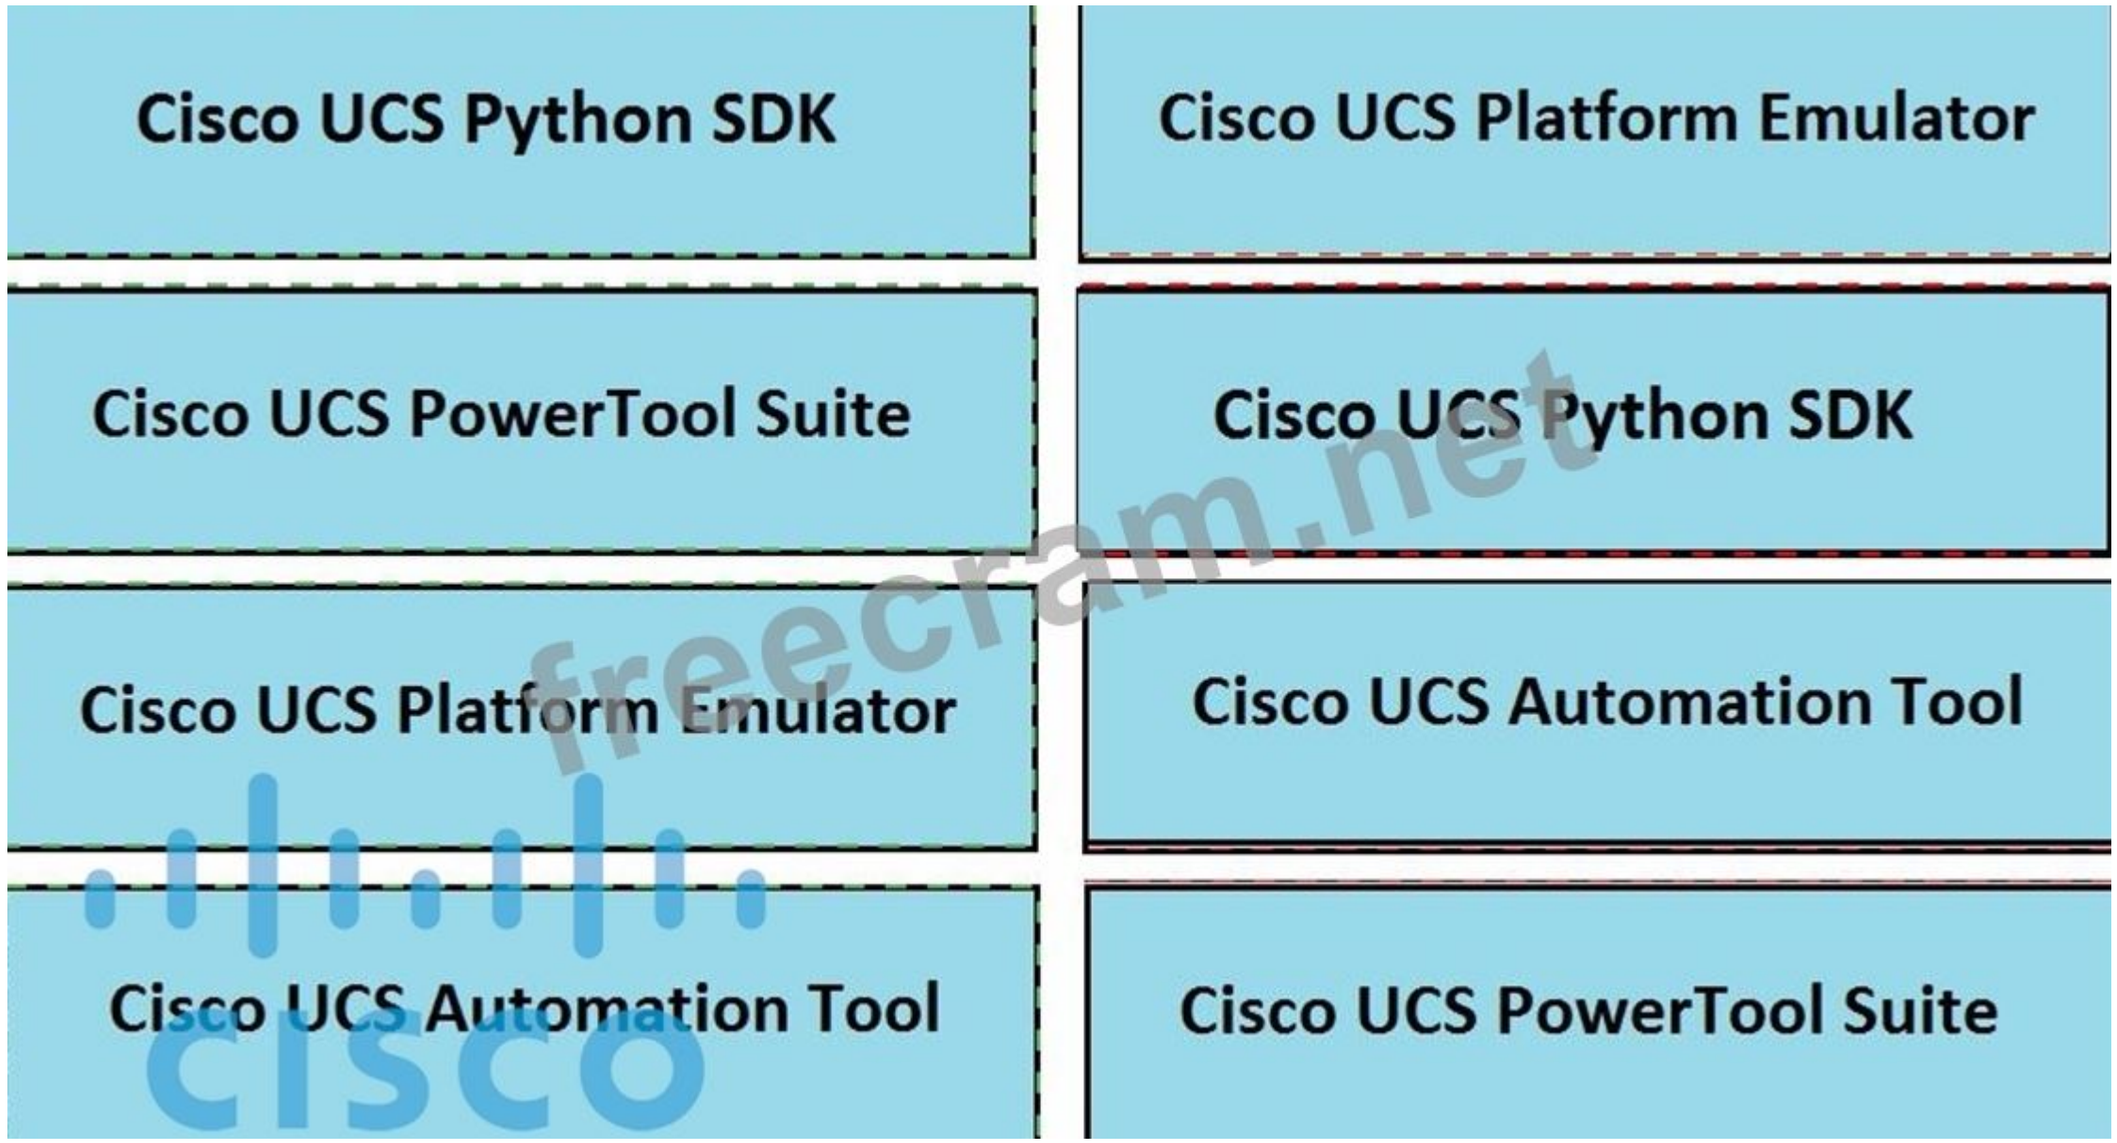


Explanation:
Cisco UCS Python SDK
(provides complete suppport for cisco ucs manager XML PAI calls,is installed as a Vm,and can be used to import and replicate existing cisco ucs manager and physical inventory)
Cisco UCS Platform Emulator
(is a module for widely used,general-purpose,high-level programming language that helps automate and manage configuration within cisco ucs manager ,including service profiles,policies ,pools,equipment,am=nd network and storage management)
Cisco UCS Automation Tool
(converts Cisco UCS Manager actions into automation scripts and captures Cisco UCS
Manager actions in XML to use in any programming language that has variables)
Cisco UCS PowerTool Suite
(is a set of Powershell modules for cisco ucs manager,cisco IMC and cisco ucs Central that aids in configuration and management of cisco ucs domains and solutions)

NEW QUESTION: 87
You need to implement a Cisco UCS system at a customer Site.
Which adapters and operating systems have preprovisioned adapter policies?


freecram.net

A. Fibre Channel vNICs and Windows, FreeBSD, and Linux Operating systems.
B. Ethernet vNICs and Windows, OS X Server. and Oracle Solaris operating systems.
C. Fibre Channel vNICs and Windows, Oracle Solaris, and Linux operating systems.
D. Ethernet vNICs and Windows, VMware, and Linux operating systems.
Answer: (SHOW ANSWER)

NEW QUESTION: 88
DRAG DROP

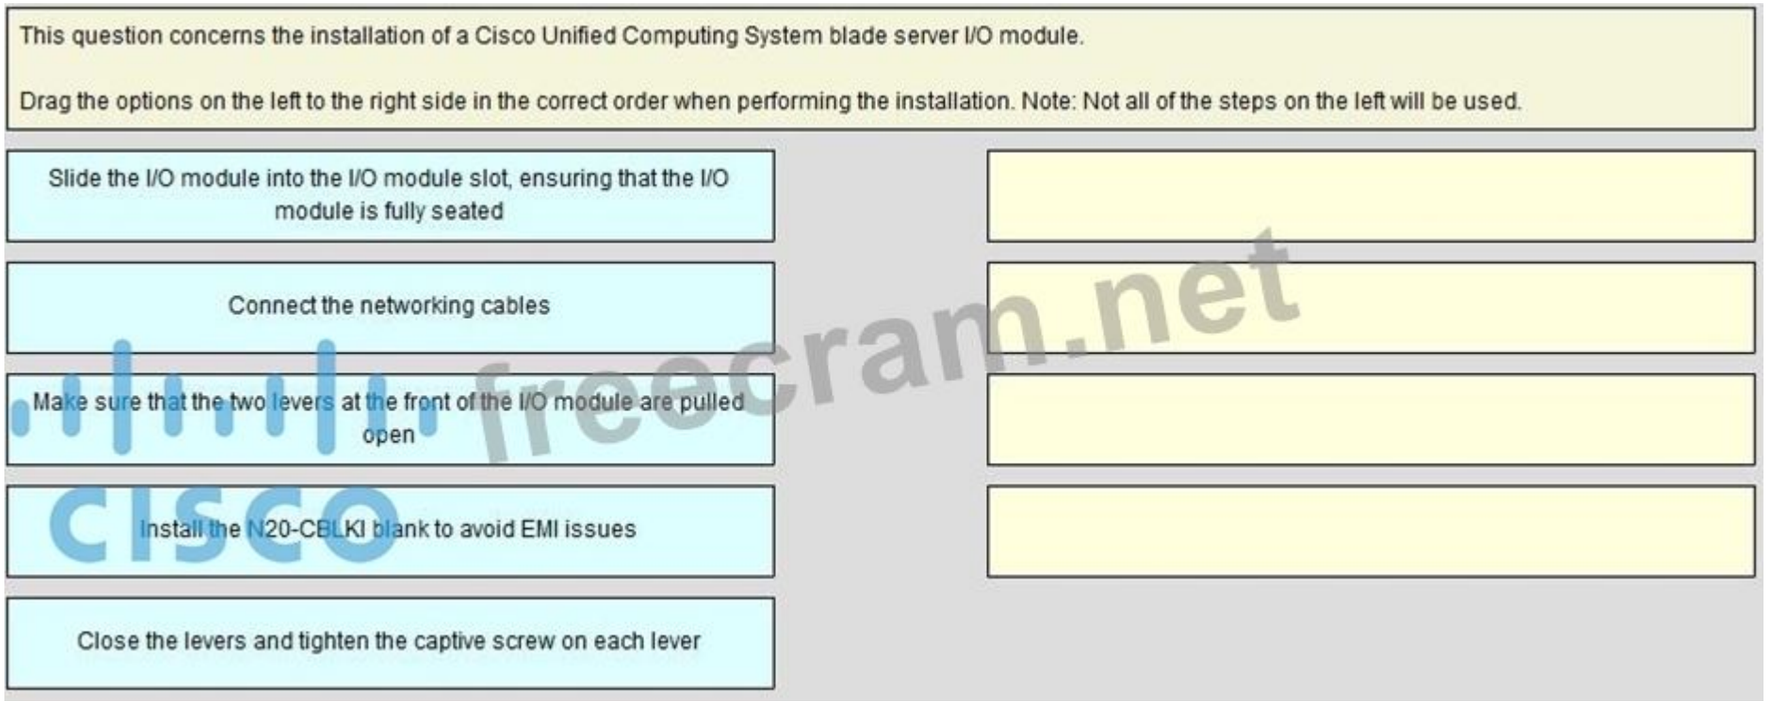

Answer:

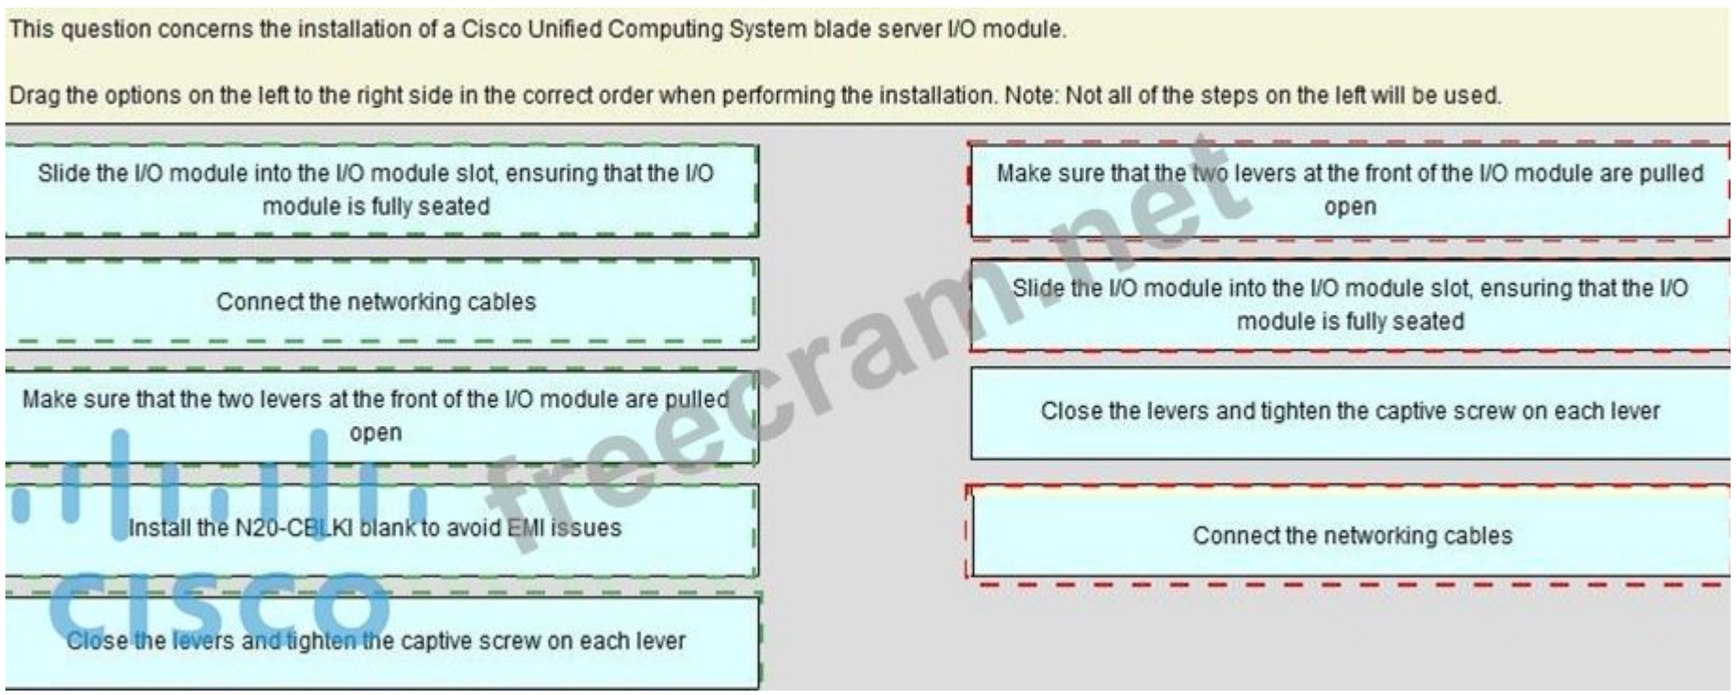

NEW QUESTION: 89
You need to identify which DCB standard provides these functionalities: negotiation capabilities for features, the distribution of parameters from one node to another, and logical link up and down signaling for both Ethernet and Fibre Channel interfaces.
Which DCB standard should you identify?
A. DCBX
B. PFC
C. QCN
D. ETS
Answer: (SHOW ANSWER)

NEW QUESTION: 90
Which two are true concerning authorization within a Cisco Unified Computing System?
(Choose two.)
Freecram.net
A. If the service profile cannot find available resources, it will search in the parent organization for pools and resources.
B. The logical resources, pools and policies, are grouped into roles.
C. Authorization consists of three components (roles, password policy, and locales) that are based on which features and resources the user will not have access to.
D. A role defines a collection of privileges that determines which actions a user can take in
Cisco Unified Computing System Manager.
E. Customized roles can be configured on and downloaded from remote AAA servers.
Answer: (SHOW ANSWER)

NEW QUESTION: 91
Which three items must be configured in the Port Profile Client in Cisco Unified Computing
System Manager? (Choose three.)
A. VMware vCenter IP address
B. port profile
C. data center
D. DVS
E. VM port group
F. folder
Answer: (SHOW ANSWER)

Valid 300-175 Dumps shared by EduDump.com for Helping Passing 300-175 Exam! EduDump.com now offer the **newest 300-175 exam dumps**, the EduDump.com 300-175 exam **questions have been updated** and **answers have been corrected** get the **newest** EduDump.com 300-175 dumps with Test Engine here:
https://www.edudump.com/exams/Cisco/300-175/premium/ (**175** Q&As Dumps, **35%OFF** **Special Discount Code:** **freecram**)

NEW QUESTION: 92
Which two statements describe the Cisco UCS Manager full state type of backup? (Choose two.)
A. It creates binary file.

B. The file created can be used for an import.
C. It creates an XML file.
D. The file created cannot be used to restore the system during disaster recovery.
E. The file created can only be used to restore a system that is running the same version as the system from which the backup file was exported.
Answer: (SHOW ANSWER)

NEW QUESTION: 93
Which maintenance action releases the assigned chassis ID for future use?
A. acknowledge chassis
B. reset CMOS
C. decommission chassis
D. remove chassis
Answer: (SHOW ANSWER)
Reference:
http://www.cisco.com/c/en/us/td/docs/unified_computing/ucs/sw/gui/config/guide/22/b_UCSM_GUI_Configuration_Guide_2_2/managing_the_chassis.html#task_EB93895D63664D86ACDE9D13C222A452

NEW QUESTION: 94
Which slot(s) contain DIMMs in a 1DPC configuration on Cisco UCS blade server?
A. 0
B. 1 and 2 only.
C. 1
D. 2
Answer: (SHOW ANSWER)
Reference:
http://www.cisco.com/c/en/us/td/docs/unified_computing/ucs/hw/bladeservers/install/B200.html

NEW QUESTION: 95
Your systems engineer has determined all of the firmware versions that the server operating system supports. What steps are taken on Cisco UCS to avoid manual firmware upgrades on the blade servers?
A. Create a BIOS policy and define the host firmware package and management firmware package.
B. Use Cisco UCS Manager firmware management to upgrade all Cisco UCS blade servers to the same target firmware versions.
C. Configure host firmware package and management firmware package policies and associate the firmware policies with the server pools.
D. Configure host firmware package and management firmware package policies and associate the firmware policies with the service profiles.
Answer: (SHOW ANSWER)

NEW QUESTION: 96
A service profile is created using vHBAs. What will happen if the profile is applied to a server with a mezzanine card without storage capability?
A. A virtual storage adapter will be created.
B. The blade association will fail.

C. The storage adapter will not be visible to the operating system.
D. A WWNN or a WWPN will be autoselected from the default pool.
Answer: (SHOW ANSWER)

NEW QUESTION: 97
Which two protocols does the Cisco Integrated Management Controller support for managing standalone Cisco UCS -Series servers? (Choose two.)
A. SoL
B. IPMI
C. IPMIv2
D. SMASH CLP
E. SNMPv3
Answer: (SHOW ANSWER)
Reference: http://www.cisco.com/c/dam/en/us/products/collateral/servers-unified- computing/ucs-cseries-rack-servers/at-a-glance-c45-737177.pdf

NEW QUESTION: 98
Which of the following is the most accurate concerning the link configuration between Cisco Unified Computing System 22XX I/O modules and Cisco Unified Computing System 62XX Fabric Interconnects?
A. Port channels do not require a Global Chassis Discovery policy.
B. Port channels are always recommended when using source-dest-mac load balancing.
C. You cannot mix and match discrete links and port channeling for different chassis when using 22XX.
D. The addition of links to a port channel requires a reacknowledgement.
Answer: (SHOW ANSWER)

NEW QUESTION: 99
Which of the following is true concerning Fibre Channel communications on a Cisco Unified Computing System?
A. FCoE VLANs may overlap with Ethernet VLANs.
B. Cisco Unified Computing System Manager supports a maximum of 128 active VSANs.
C. FCoE VLANs are created like Ethernet VLANs on Cisco Unified Computing System Manager.
D. Each VSAN requires a dedicated VLAN to carry FCoE traffic.
Answer: D (LEAVE A REPLY)

NEW QUESTION: 100
Which three AAA protocols are supported for communication with external AAA providers? (Choose three.)
Freecram.net
A. 802.1X
B. AD
C. TACACS+
D. LDAP

E. ACS
F. RADIUS
Answer: (SHOW ANSWER)

NEW QUESTION: 101
You need to configure a new Fibre Channel port channel from the Cisco UCS Manager GUI. To do this, from the SAN tab, you navigate to SAN Cloud > Fabric A or B > FC Port Channels, and you click the plus sign. In the popup window, you specify the Fibre Channel port channel name and ID.
Which two rules should you follow when you set the Fibre Channel port channel name and ID? (Choose two.)
A. The Fibre Channel port channel ID is optional.
B. The Name field must be a number.
C. The Name field is optional, but it cannot contain spaces.
D. The Fibre Channel port channel ID must be a number.
E. The ID field can contain ASCII characters, except for spaces.
Answer: (SHOW ANSWER)


NEW QUESTION: 102
The system-reserved VLANs within Cisco UCS are 3968 to 4048 by default. Where can a user change the starting value of this range?
A. cannot be changed
B. LAN cloud
C. global policies
D. VLAN manager
Answer: (SHOW ANSWER)

NEW QUESTION: 103
You are implementing a UCS B-Series environment for a customer with both bare-metal and virtualized servers. The bare-metal servers require two vNICs and two vHBAs. Administrators of virtualized servers will be utilizing VN-Link technology. Which adapter should be recommended?
A. Cisco UCS M81KR
B. Cisco UCS M51KR-B
C. Cisco UCS P81E
D. Cisco UCS M72KR-Q
E. Cisco UCS M71KR-E
Answer: (SHOW ANSWER)


NEW QUESTION: 104
You need to automate the management of servers, networks, and storage on a Cisco UCS system, by using PowerShell.
Which tool should you use?
A. Cisco UCS Python SDK
B. Cisco UCS PowerTool Suite
C. Cisco UCS Automation Tool

D. Cisco UCS Platform Emulator
Answer: (SHOW ANSWER)

NEW QUESTION: 105
HOTSPOT

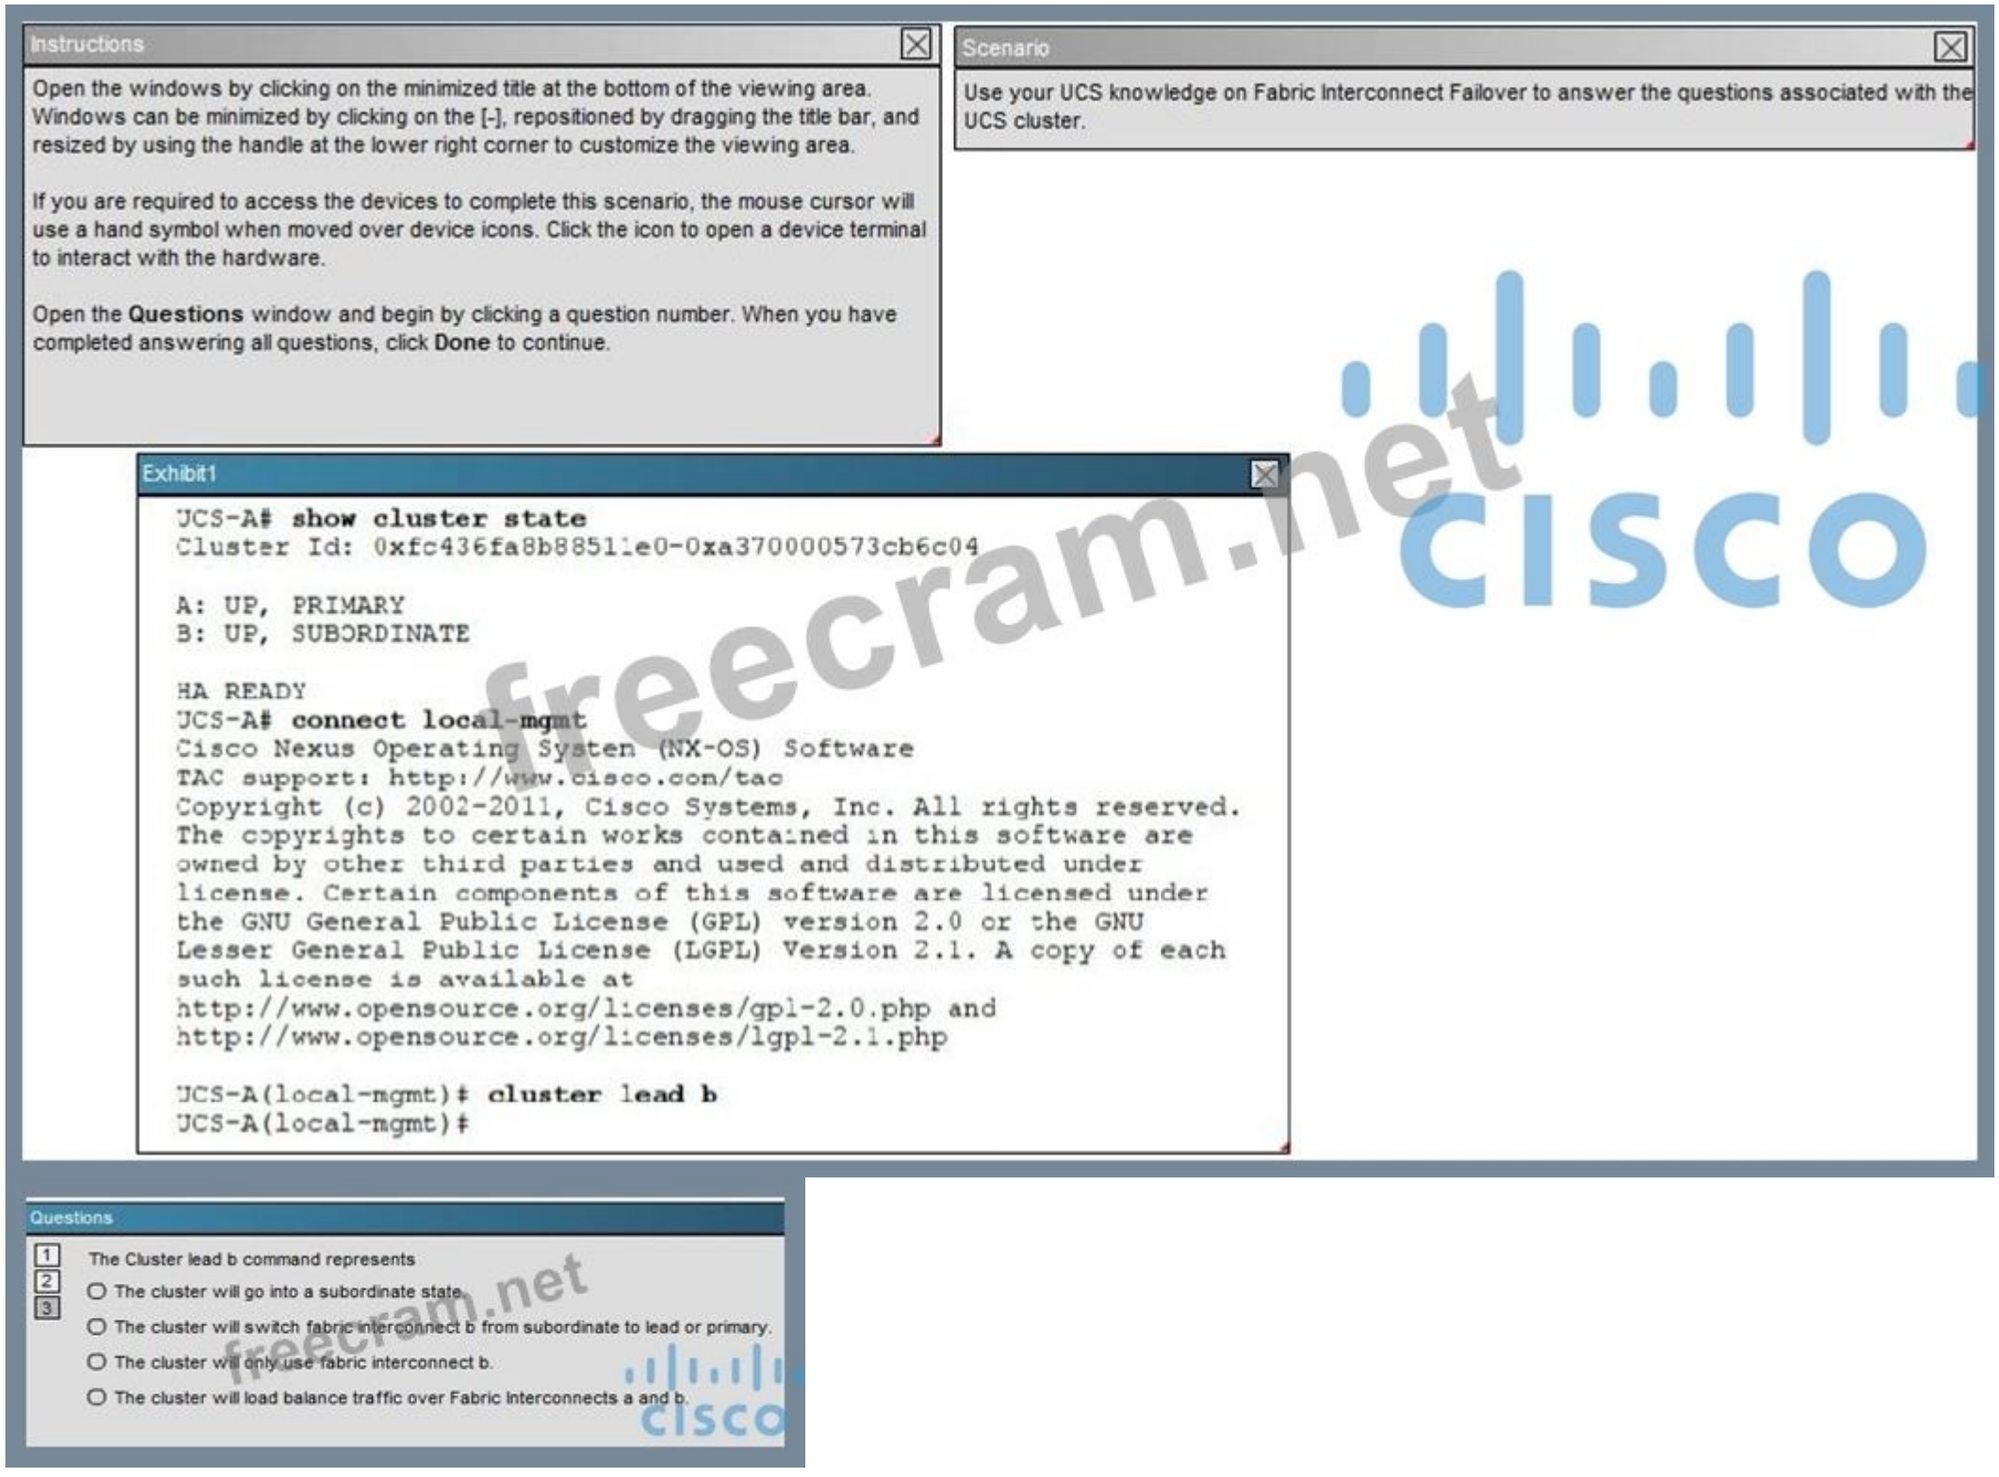

Answer:

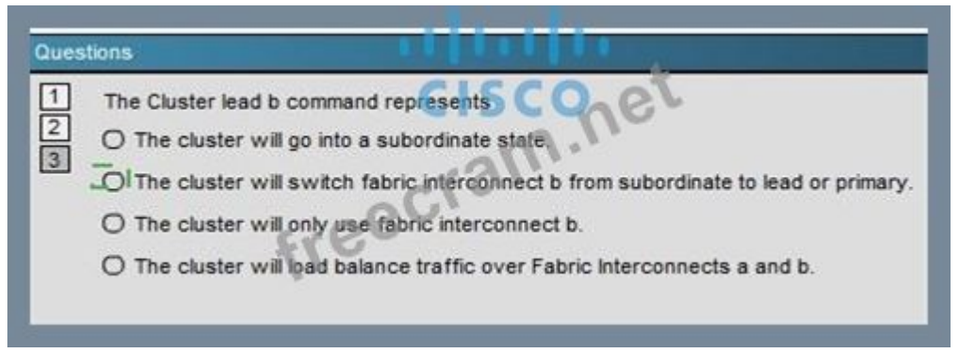

Explanation: The cluster will switch fabric interconnect b from subordinate to lead or primary.

NEW QUESTION: 106
Which two statements about MAC addresses in the Cisco UCS are true? (Choose two.)
A. The last 4 octets are assigned by the organization itself.
B. The last 3 octets are assigned by the organization itself.
C. The first 3 octets represent the manufacturer OUI.
D. The first 2 octets represent the manufacturer OUI.
Answer: (SHOW ANSWER)

Valid 300-175 Dumps shared by EduDump.com for Helping Passing 300-175 Exam! EduDump.com now offer the **newest 300-175 exam dumps**, the EduDump.com 300-175 exam **questions have been updated** and **answers have been corrected** get the **newest** EduDump.com 300-175 dumps with Test Engine here:
https://www.edudump.com/exams/Cisco/300-175/premium/ (**175** Q&As Dumps, **35%OFF** **Special Discount Code:** **freecram**)

NEW QUESTION: 107
Which two statements about the service profile configuration options in the Cisco UCS Manager GUI are true? (Choose two.)
A. It can be configured by using the chassis connectivity policy.
B. It can be generated automatically from the service profile template.
C. It can be derived from the initial template or the updating template.
D. It can be configured by cloning a virtual machine profile.
E. It can be derived from the chassis discovery policy.
Answer: B,C (LEAVE A REPLY)

NEW QUESTION: 108
When you create a vHBA, what will you achieve by enabling persistent binding?
A. This feature allows the binding of the same WWPN from the pool to the vHBA, even across reboots.
B. This feature allows the binding of the same WWNN from the pool to the vHBA, even across reboots.
C. This feature allows the binding of the Fibre Channel uplink to the vHBA, even across reboots.
D. This feature allows the binding of the SCSI targets to the vHBA, even across reboots.
Answer: D (LEAVE A REPLY)

NEW QUESTION: 109
You are configuring HTTPS access to Cisco UCS Manager. You create a key ring, you issue a certificate request for the key ring, and you create the certificate request for the key ring. You discover that you still receive untrusted connection messages when connecting to
Cisco UCS Manager from a Firefox browser and a Google Chrome browser.
What should you do to resolve the issue?
A. Create a trusted point.
B. Use only the Microsoft Internet Explorer browser.
C. Obtain a validated certificate from Cisco.
D. Sign the certificate by using Cisco UCS Manager.
Answer: (SHOW ANSWER)

NEW QUESTION: 110
You need to enable Cisco UCS Manager to support out-of-band IPv4 address access to the Cisco UCS KVM Direct launch page from a web browser.
What should you enable?
Freecram.net
A. CIMC Web Service
B. SNMP
C. SMASH CLP
D. CIM XML
Answer: (SHOW ANSWER)

NEW QUESTION: 111
Which command sequence in the Cisco UCS C-Series rack server CLI sends tech support data to a TFTP server?
A. ucs-c250 / # scope system
ucs-c250 /system # scope tech-support
ucs-c250 /system/tech-support # set path default.tar.gz
ucs-c250 /system/tech-support *# set tftp-ip 192.168.70.45
ucs-c250 /system/tech-support *# commit
B. ucs-c250 / # scope fault
ucs-c250 /fault # scope tech-support
ucs-c250 /fault/tech-support # set path default.tar.gz
ucs-c250 /fault/tech-support *# set tftp-ip 192.168.70.45
ucs-c250 /fault/tech-support *# commit
C. ucs-c250 / # scope support
ucs-c250 /support # scope tech-support
ucs-c250 /support/tech-support # set path default.tar.gz
ucs-c250 /support/tech-support *# set tftp-ip 192.168.70.45
ucs-c250 /support/tech-support *# commit
D. ucs-c250 / # scope cimc
ucs-c250 /cimc # scope tech-support
ucs-c250 /cimc/tech-support # set path default.tar.gz

ucs-c250 /cimc/tech-support *# set tftp-ip 192.168.70.45
ucs-c250 /cimc/tech-support *# commit
Answer: (SHOW ANSWER)

NEW QUESTION: 112
Which two protocols does the Cisco Integrated Management Controller support for managing standalone Cisco UCS C-Series servers? (Choose two.)
A. SNMPv3
B. SoL
C. SMASH CLP
D. IPMIv2
E. Virtual KVM
Answer: (SHOW ANSWER)

NEW QUESTION: 113
When upgrading a standalone Cisco UCS C-Series server, which method is correct?
A. Cisco Hardware Upgrade Utility
B. direct upgrade on all components
C. Cisco Server Upgrade Utility
D. Cisco Host Upgrade Utility
Answer: (SHOW ANSWER)

NEW QUESTION: 114
Which two are true with respect to the upgrade process for the Cisco Unified Computing
System? (Choose two.)
A. The I/O module, CIMC, and adaptors update process operates strictly on the backup partition of Flash for a given component.
B. When the bundle image is downloaded, it must be transferred to the flash file system of the active fabric interconnect.
C. It is strongly recommended that you activate all components in all chassis at one time.
D. You can choose from FTP, TFTP, SCP, and HTTP to copy the bundle image from a remote file system.
E. When the download is successful, Cisco Unified Computing System Manager expands the individual files from the archive and installs them in the correct flash file system partition.
F. For easier manageability, Cisco provides one full bundle that contains the firmware images for all Cisco Unified Computing System components.
Answer: (SHOW ANSWER)


NEW QUESTION: 115
Which boot option must be present in the boot policy to have the option to manually boot from the FlexFlash Secure Digital card?
A. local disk
B. any configuration
C. remote virtual drive
D. FlexFlash state
Answer: (SHOW ANSWER)

NEW QUESTION: 116
Which four physical connections on a fabric interconnect are needed to perform the initial system setup for a cluster configuration? (Choose four.)
A. Ethernet uplink ports connected to upstream switch
B. Layer 1 ports on both fabric interconnects connected to each other
C. console port connected to a computer terminal or console server.
D. port channel to each fabric interconnect
E. Fibre Channel uplink ports connected to upstream fabric switch
F. Layer 2 ports on both fabric interconnects connected to each other
G. Layer 1 port of the first fabric interconnect connected to Layer 2 port of the second fabric interconnect
H. management Ethernet port (mgmt0) connected to external switch or router
Answer: (SHOW ANSWER)

NEW QUESTION: 117
DRAG DROP



Answer:

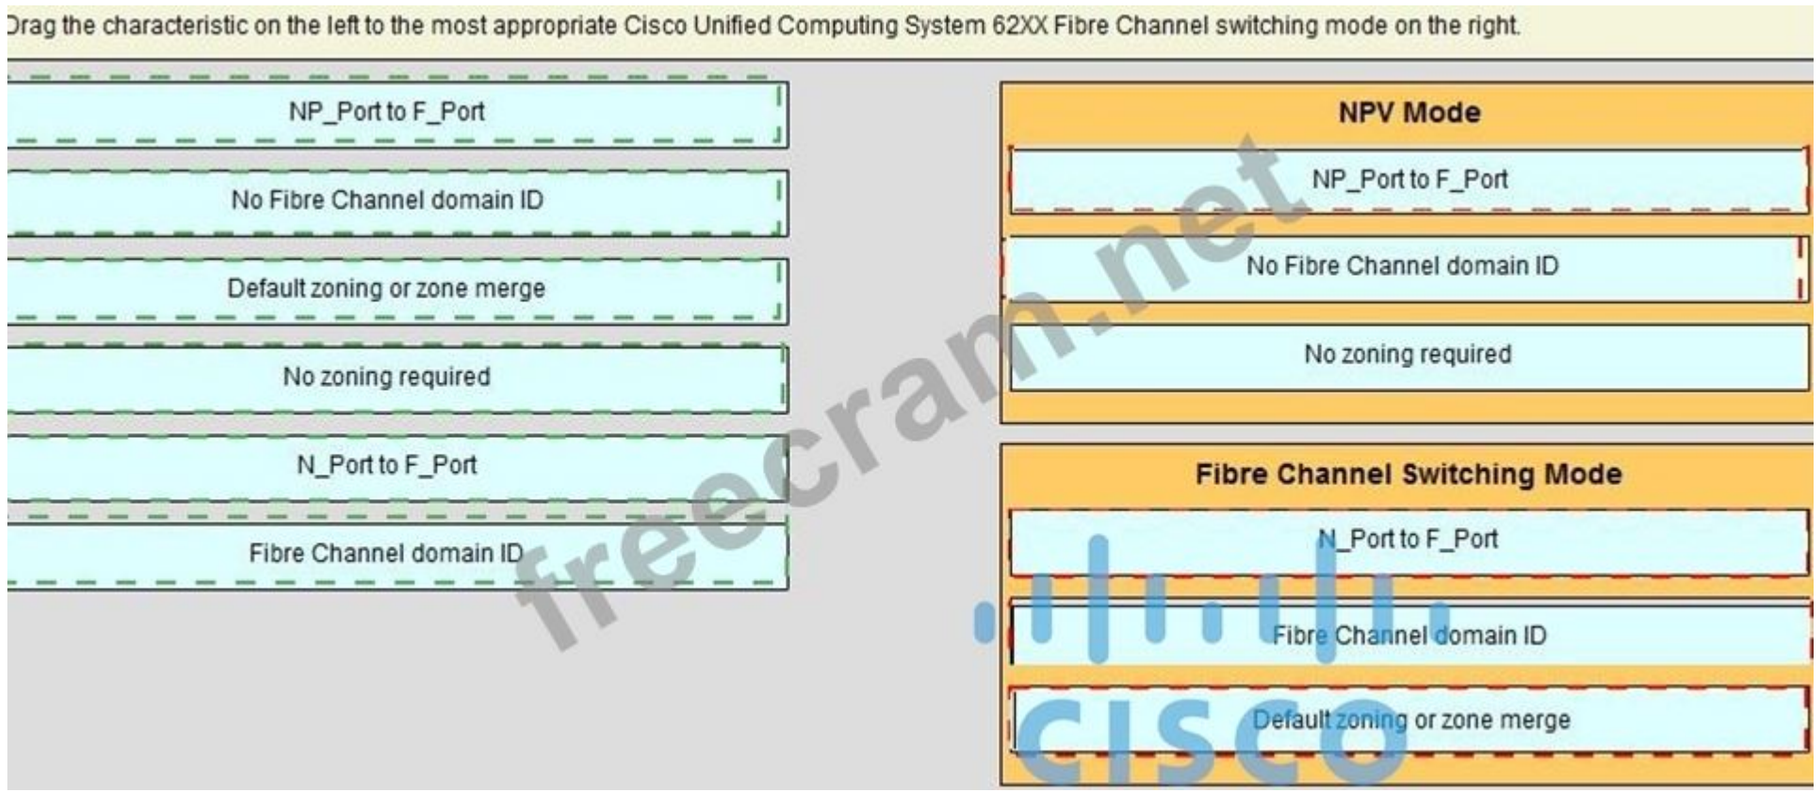

NEW QUESTION: 118
Which two items represent the features of Call Home on the Cisco Unified Computing System? (Choose two.)
A. SNMP trap receiver
B. send fault details to Cisco TAC
C. syslog
D. send email alerts to administrators
E. central repository of normalized fault data
Answer: (SHOW ANSWER)

NEW QUESTION: 119
What are the default settings of the Cisco IMCCIMC NIC properties on a standalone Cisco UCS C-Series server?
A. 'Shared LOM' NIC mode with 'Active-standby' NIC redundancy and DHCP enabled
B. 'Dedicated' NIC mode with 'Active-standby' NIC redundancy DHCP disabled
C. 'Dedicated' NIC mode with 'None' NIC redundancy and DHCP enabled
D. 'Cisco Card' NIC mode with 'Active-active' NIC redundancy and DHCP enabled
E. 'Shared LOM' NIC mode with 'Active-active' NIC redundancy and DHCP enabled
Answer: (SHOW ANSWER)

NEW QUESTION: 120
The Cisco UCS 6200 Series Fabric Interconnects offer a new feature that allows dynamic port allocation for all of the 10 Gigabit Ethernet interfaces. What are these ports called?

A. unified ports
B. converged ports
C. flex ports
D. universal ports
Answer: (SHOW ANSWER)

NEW QUESTION: 121
Which of the following are true concerning authentication within a Cisco Unified Computing System?
A. Authentication domains are used to leverage individual authentication systems.
B. A locally authenticated user account is authenticated directly through the fabric interconnect.
C. Cisco Unfiled Computing System supports LDAP or RADIUS for remote authentication.
D. You can create up to 64 authentication domains, each associated with a provider group and realm in Cisco Unified Computing System Manager.
Answer: (SHOW ANSWER)

Valid 300-175 Dumps shared by EduDump.com for Helping Passing 300-175 Exam! EduDump.com now offer the **newest 300-175 exam dumps**, the EduDump.com 300-175 exam **questions have been updated** and **answers have been corrected** get the **newest** EduDump.com 300-175 dumps with Test Engine here:
https://www.edudump.com/exams/Cisco/300-175/premium/ (**175** Q&As Dumps, **35%OFF** **Special Discount Code:** **freecram**)

NEW QUESTION: 122
Which three statements are a result of utilizing org permissions on VLANs within a sub- org? (Choose three.)
A. VLAN IDs can be defined within each sub-org.
B. VLAN name must match across orgs and sub-orgs.
C. Parent org vNICs can utilize sub-org VLANs.
D. VLAN name can be different per sub-org.
E. Sub-org vNICs can utilize only parent org native VLANs.
F. Sub-org vNICs can utilize parent org VLANs.
G. VLAN IDs can be defined only once globally.
Answer: (SHOW ANSWER)

NEW QUESTION: 123
Which statement about Cisco Integrated Management Controller secure mode is true?
A. The server must reboot to apply.
B. After you enable it, you cannot disable it.
C. After you enable it, you cannot downgrade the Cisco Integrated Management Controller firmware.
D. It verifies the OS before allowing it to boot.
Answer: (SHOW ANSWER)

NEW QUESTION: 124
You need to configure storage switch-based Fibre Channel zoning in a Cisco UCS system.

The zoning must be configured in VSAN 100.
What should you do?
A. Discover the SAN switch in Cisco UCS Manager. Enable inherited zoning on VSAN 100 in Cisco UCS Manager.
B. Disable zoning on VSAN 100 in Cisco UCS Manager. Configure zoning on the upstream
SAN switch on VSAN 100.
C. Register the SAN switch manually in Cisco UCS Manager. Enable switch-based zoning on VSAN 100 in Cisco UCS Manager.
D. Disable zoning on VSAN 100 in Cisco UCS Manager. Set Cisco UCS Manager to interoperability mode. Create VSAN 100 in Cisco UCS Manager. Configure zoning on the upstream third-party SAN switch.
Answer: (SHOW ANSWER)

NEW QUESTION: 125
While configuring VM-FEX for Hyper-V, the virtual switch does not show up when you add the host with the port-profile management snap-in. Which statement describes the most likely cause?
A. VM-FEX does not work with Hyper-V.
B. Cisco Nexus 1000v is not enabled for the virtual switch.
C. SR-IOV is not enabled for the virtual switch inside Hyper-V.
D. An active VM is not associated with the port profile.
E. Hyper-V requires Cisco UCS Manager to utilize Cisco Discovery Protocol on the vNIC profile.
F. VM-FEX has been configured on the Catalyst switch but not in System Center yet.
Answer: (SHOW ANSWER)

NEW QUESTION: 126
DRAG DROP

This question concerns the installation of a Cisco Unified Computing System blade server AC power supply.

Drag the options on the left to the right side in the correct order when performing the installation. Note: Not all of the steps on the left will be used.


Press the handle down and give the power supply a gentle push inward to ensure that the power supply is fully seated	
Plug the power cable into the corresponding 220 VAC-inlet connector on the PDU at the rear of the chassis	
Connect the other end of the power cable to the AC power source	
Connect the DC input wires to the power supply terminal block	
Place the power supply handle in the up position	
Connect the ground wires to the power supply terminal block	
Tighten the captive screw	
Hold the power supply with both hands and then slide it into the power supply bay	

CISCO
freecram.net

Answer:

This question concerns the installation of a Cisco Unified Computing System blade server AC power supply.

Drag the options on the left to the right side in the correct order when performing the installation. Note: Not all of the steps on the left will be used.

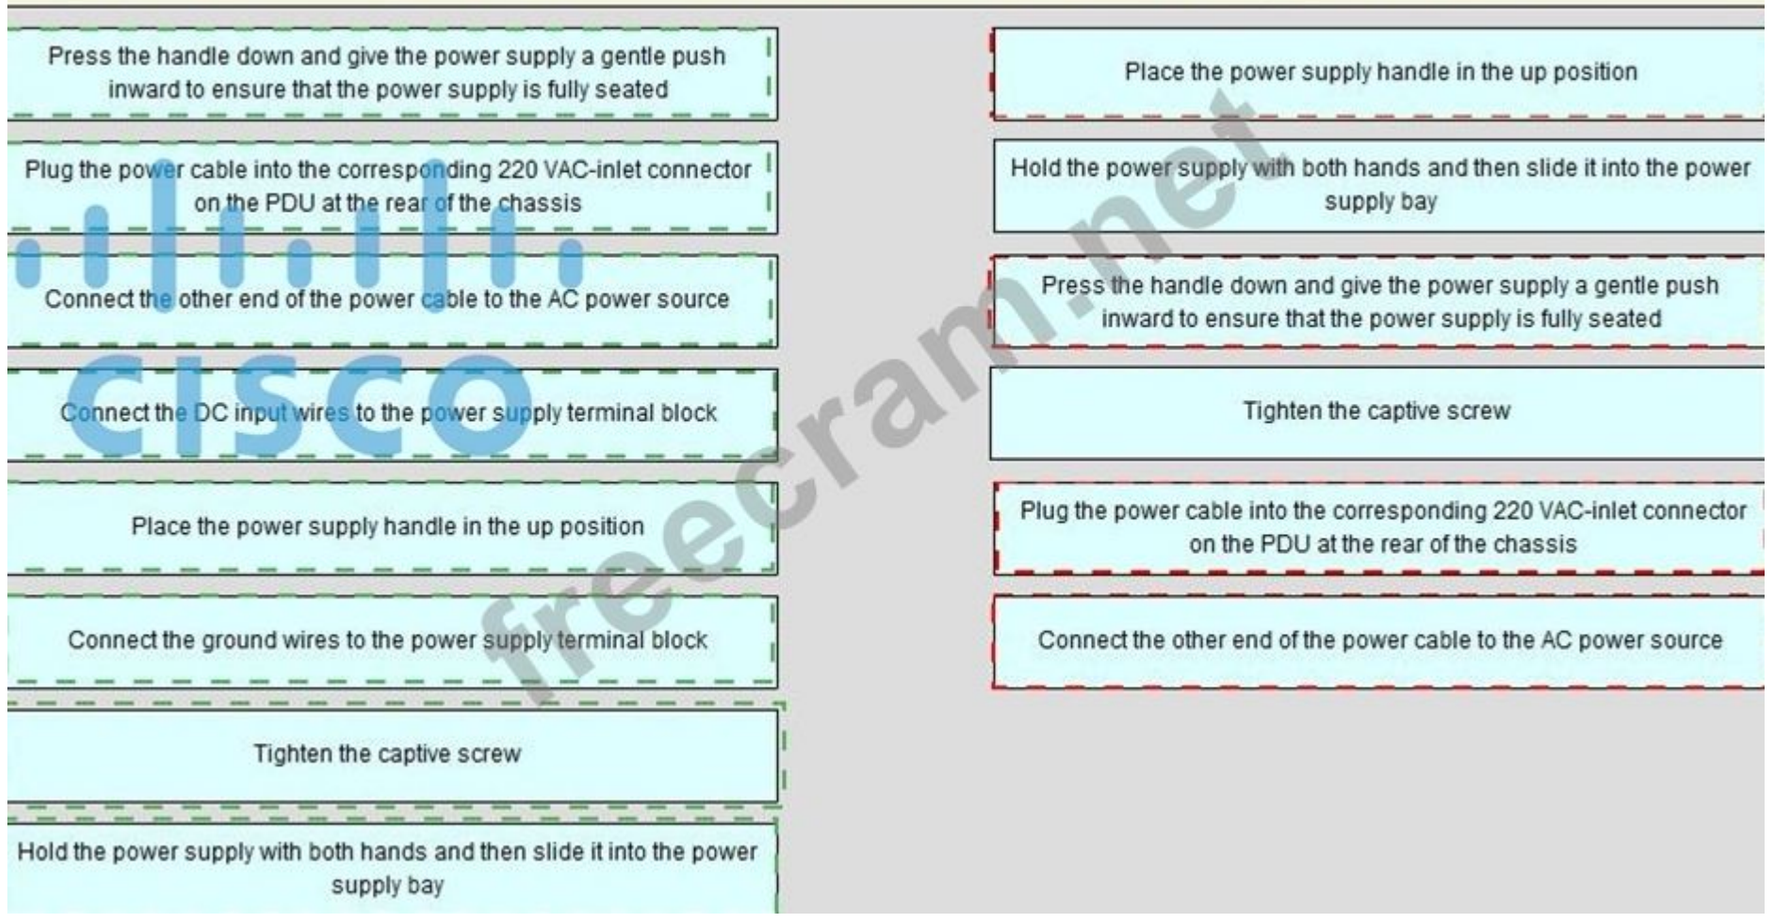

freecram.net

NEW QUESTION: 127
Which policy is used to update adapter firmware?
A. adapter policy
B. network control policy
C. management firmware policy
D. host firmware policy
Answer: (SHOW ANSWER)

NEW QUESTION: 128
While configuring communication between vCenter and Cisco UCS, which two items are contained in the extension file? (Choose two.)
A. SSL private certificate
B. Cisco UCS Manager SSL public certificate
C. plug-in version information
D. vCenter SSL public certificate
E. SSH public key
F. IP address of the hosts utilizing VM link
G. extension key

H. Cisco UCS Manager admin credentials
Answer: (SHOW ANSWER)

NEW QUESTION: 129
If a customer wants to maximize the capability of server mobility with the Cisco UCS deployment, what two options are Cisco recommended? (Choose two.)
A. Configure a server inheritance policy.
B. Configure service profiles with resource pools.
C. Configure a Virtual Media boot.
D. Configure boot from SAN.
E. Configure a hardware-based service profile with burned-in addresses and identities.
Answer: (SHOW ANSWER)

NEW QUESTION: 130
Which Cisco UCS B-Series Blade Server is capable of RAID 5?
A. B230
B. B250
C. B200
D. B440
Answer: (SHOW ANSWER)

NEW QUESTION: 131
Which two options occur when a server discovery policy is invoked? (Choose two.)
A. creates a service profile for the server with the identity burned into the server at time of manufacture
B. applies the scrub policy to the server
C. assigns the server to the selected organization, if configured
D. executes the qualification in the server discovery policy against the server
E. analyzes the inventory of the server
Answer: D,E (LEAVE A REPLY)

NEW QUESTION: 132
Cisco UCS Manager has deleted the VM object from its database, yet it still exists in vCenter. For which two reasons is the object removed from the Cisco UCS Manager database? (Choose two.)
A. The VM last passed traffic more than 5 minutes ago.
B. The VN link policy has been set for auto-deletion during a vMotion event.
C. The link between the fabric interconnect and IOM is offline.
D. The VM has been offline for more than 15 minutes.
E. The VM is misconfigured.
F. The VM traffic is being sent to a SPAN
G. vCenter is offline.
H. The object was deleted in the Cisco UCS Manager, which also deletes it from vCenter.
Answer: (SHOW ANSWER)

NEW QUESTION: 133
Which virtual hardware version is required for a VM to enter the Cisco VM-FEX universal passthrough mode?
A. Version 7
B. Version 8
C. Version 9
D. Version 6
E. Version 5
Answer: (SHOW ANSWER)

NEW QUESTION: 134
Which two features in Cisco UCS Manager are required to configure Uplink Ethernet ports?
(Choose two.)
A. link profiles
B. vNIC templates
C. adapter policies
D. VLAN groups
E. LAN Pin Groups
Answer: (SHOW ANSWER)

NEW QUESTION: 135
Which description of an import operation in Cisco UCS Manager is true?
A. You can schedule an import operation.
B. You can import only a configuration file that was exported from the same Cisco UCS Manager.
C. You can perform an import while the system is up and running.
D. You can import a configuration from a higher release to a lower release.
Answer: (SHOW ANSWER)

NEW QUESTION: 136
What is the maximum number of ports on a VMware vCenter Distributed Virtual Switch?
A. 4096
B. 128
C. 8192
D. 64
E. 1024
Answer: (SHOW ANSWER)

Valid 300-175 Dumps shared by EduDump.com for Helping Passing 300-175 Exam! EduDump.com now offer the **newest 300-175 exam dumps**, the EduDump.com 300-175 exam **questions have been updated** and **answers have been corrected** get the **newest** EduDump.com 300-175 dumps with Test Engine here:
https://www.edudump.com/exams/Cisco/300-175/premium/ (**175** Q&As Dumps, **35%OFF** **Special Discount Code:** **freecram**)

NEW QUESTION: 137
Which two descriptions of a WWN pool are true? (Choose two.)
A. a collection of WWNs for use by the iSCSI interfaces in a Cisco UCS instance
B. a collection of Ethernet MAC addresses assigned to the Ethernet adapters in a Cisco UCS instance
C. a pool of WW port names, where WWPN is the port name assigned to the Fibre Channel port on the adapter
D. a collection of management IP addresses used to connect to servers
E. a pool of WW node names, where WWNN belongs to the node
Answer: C,E (LEAVE A REPLY)
Reference:
http://www.cisco.com/c/en/us/td/docs/unified_computing/ucs/sw/gui/config/guide/1-31/b_UCSM_GUI_Configuration_Guide_1_3_1/UCSM_GUI_Configuration_Guide_1_3_1_chapter22.html

NEW QUESTION: 138
You have a Cisco UCS system. You need to create VSAN 100 on 2 Cisco Nexus Series switch and to enable switch port fc1/10 as a member for the VLAN.
Which command set should you use?
A. SITE-A-MDS-Fabric-A# configure terminalSITE-A-MDS-Fabric-A (config)# vsan databaseSITE-A-MDS-Fabric-A(config-vsan-db)# vsan 100 interface fc1/10SITE-A-MDS-Fabric-A (config-vsan-db)# vsan database commitSITE-A-MDS-Fabric-A (config-vsan-db)# exit
B. SITE-A-MDS-Fabric-A# vsan databaseSITE-A-MDS-Fabric-A (vsan-db)# vsan 100 interface fc1/10SITE-A-MDS-Fabric-A (vsan-db)# vsan database commitSITE-A-MDS-
Fabric-A (vsan-db)# exit
C. SITE-A-MDS-Fabric-A# configure terminalSITE-A-MDS-Fabric-A (config)# vsan databaseSITE-A-MDS-Fabric-A (config-vsan-db)# vsan 100 interface fc1/10SITE-A-MDS-
Fabric-A (config-vsan-db)# exit
D. SITE-A-MDS-Fabric-A# configure terminalSITE-A-MDS-Fabric-A (config)# vsan databaseSITE-A-MDS-Fabric-A (config-vsan-db)# vsan 100 interface fc1/10SITE-A-MDS-
Fabric-A (config-vsan-db)# vsan database commit
Answer: C (LEAVE A REPLY)

NEW QUESTION: 139
Which two are true with respect to the unified ports on the Cisco Unified Computing System
62XX Fabric Interconnect? (Choose two.)
A. After making port mode changes on an expansion module, the module will reboot.
B. The port mode is automatically discovered after plugging in a LAN or Fibre Channel- attached cable.
C. Ethernet ports must be grouped together in a block and must start with the first port and end with an odd numbered port.
D. In a standalone configuration, making port mode changes to the fixed module will not cause the fabric interconnect to reboot.
E. By default, unified ports that are changed to Ethernet port mode are set to uplink

Ethernet port type.
F. Alternating Ethernet and Fibre Channel ports is supported on the expansion module.
Answer: (SHOW ANSWER)

NEW QUESTION: 140
Which network driver is required on a VMware ESXi 5.0 host for a vNIC to enter Cisco VM-FEX universal passthrough mode?
Freecram.net
A. VMXNET3
B. Vlance
C. VMXNET5
D. Flexible
E. E1000e
Answer: (SHOW ANSWER)

NEW QUESTION: 141
Which actions must be taken in order to connect a NetApp FCoE storage system to a Cisco
UCS system?
A. Ensure that the Fibre Channel switching mode is set to Switching, and reconfigure the port to a FCoE Storage port.
B. Ensure that the Fibre Channel switching mode is set to Switching, and use the Fibre
Channel ports on the Fabric Interconnects.
C. Ensure that the Fibre Channel switching mode is set to End-Host, and use the Ethernet ports on the Fabric Interconnects.
D. Ensure that the Fibre Channel switching mode is set to Switching, and use the Ethernet ports on the Fabric Interconnects.
Answer: (SHOW ANSWER)

NEW QUESTION: 142
Which three items represent some of the components to implement Cisco VM-FEX for
Cisco Unified Computing System Manager B-Series blades? (Choose three.)
A. VMware vCenter server
B. VEM in the VMware ESX or ESXi host
C. Fibre Channel VMFS volume
D. VEM installed on the VMware vCenter server
E. Cisco VSM VM
F. Cisco Unified Computing System Manager version 1.2 or higher
Answer: (SHOW ANSWER)

NEW QUESTION: 143
View the Exhibit.



```
SITE-A-MDS-Fabric-A# sh flogi dat
--------------------------------------------------------------------------------
INTERFACE        VSAN    FCID           PORT NAME               NODE NAME
--------------------------------------------------------------------------------
fc1/3            100     0x6b0000  50:00:14:42:c0:0c:f5:00 50:00:14:40:47:a0:0c:f5
fc1/4            100     0x6b0200  50:00:14:42:c0:0c:f5:01 50:00:14:40:47:a0:0c:f5
fc1/5            100     0x6b0300  50:00:14:42:d0:0c:f5:00 50:00:14:40:47:b0:0c:f5
fc1/6            100     0x6b0100  50:00:14:42:d0:0c:f5:01 50:00:14:40:47:b0:0c:f5
fc1/7            50      0x550000  50:00:14:42:c0:0c:f5:20 50:00:14:40:47:a0:0c:f5
fc1/8            50      0x550100  50:00:14:42:c0:0c:f5:21 50:00:14:40:47:a0:0c:f5
fc1/9            50      0x550200  50:00:14:42:d0:0c:f5:20 50:00:14:40:47:b0:0c:f5
fc1/10           50      0x550300  50:00:14:42:d0:0c:f5:21 50:00:14:40:47:b0:0c:f5
fc1/11           100     0x6b0400  20:20:54:7f:ee:fa:de:c0 20:64:54:7f:ee:fa:de:c1
fc1/11           100     0x6b0401  20:00:00:25:b5:00:01:02 20:00:00:25:b5:00:00:01
fc1/11           100     0x6b0402  20:00:00:25:b5:00:01:00 20:00:00:25:b5:00:00:00
fc1/11           100     0x6b0403  20:00:00:25:b5:00:01:03 20:00:00:25:b5:00:00:01
fc1/11           100     0x6b0404  20:00:00:25:b5:00:01:01 20:00:00:25:b5:00:00:00

Total number of flogi = 13.
```

Refer to the exhibit. You need to configure a Fibre Channel device alias named TEST for a device that is attached to port fc 1/9 of a Cisco Nexus Series switch in a Cisco UCS system.

Which command set should you use?

A. SITE-A-MDS-Fabric-A# device-alias databaseSITE-A-MDS-Fabric-A (device-alias-db)# device-alias name TEST pwwn 50:00:14:40:47:b0:0c:f5SITE-A-MDS-Fabric-A (config- device-alias-db)# device-alias commit

B. SITE-A-MDS-Fabric-A# configure terminalSITE-A-MDS-Fabric-A (config)# device-alias databaseSITE-A-MDS-Fabric-A(config-device-alias-db)# device-alias name TEST pwwn
50:00:14:40:47:b0:0c:f5SITE-A-MDS-Fabric-A (config-device-alias-db)# device-alias commit

C. SITE-A-MDS-Fabric-A# configure terminalSITE-A-MDS-Fabric-A (config)# device-alias databaseSITE-A-MDS-Fabric-A (config-device-alias-db)# device-alias name TEST pwwn
50:00:14:42:d0:0c:f5:20SITE-A-MDS-Fabric-A (config-device-alias-db)# device-alias commit

D. SITE-A-MDS-Fabric-A# configure terminalSITE-A-MDS-Fabric-A (config)# device-alias databaseSITE-A-MDS-Fabric-A (config-device-alias-db)# device-alias name TEST pwwn
50:00:14:42:d0:0c:f5:20SITE-A-MDS-Fabric-A (config-device-alias-db)# exit

Answer: (SHOW ANSWER)

NEW QUESTION: 144

An administrator is testing the Cisco Nexus 1000v switch on top of a Cisco UCS Blade.

They realize that the test VM traffic is not marked correctly after it leaves the Cisco UCS B- series blade. What is the reason for seeing this behavior?

A. The Cisco Nexus 1000V Series Switch QoS marking has not been enabled with "feature gos."

B. The Cisco UCS does not support QoS marking


C. The Cisco UCS QoS policy applied to the blade has the host control set to "none."

D. The Cisco Nexus 1000V Series Switches do not support QoS marking.


Answer: (SHOW ANSWER)

NEW QUESTION: 145

DRAG DROP

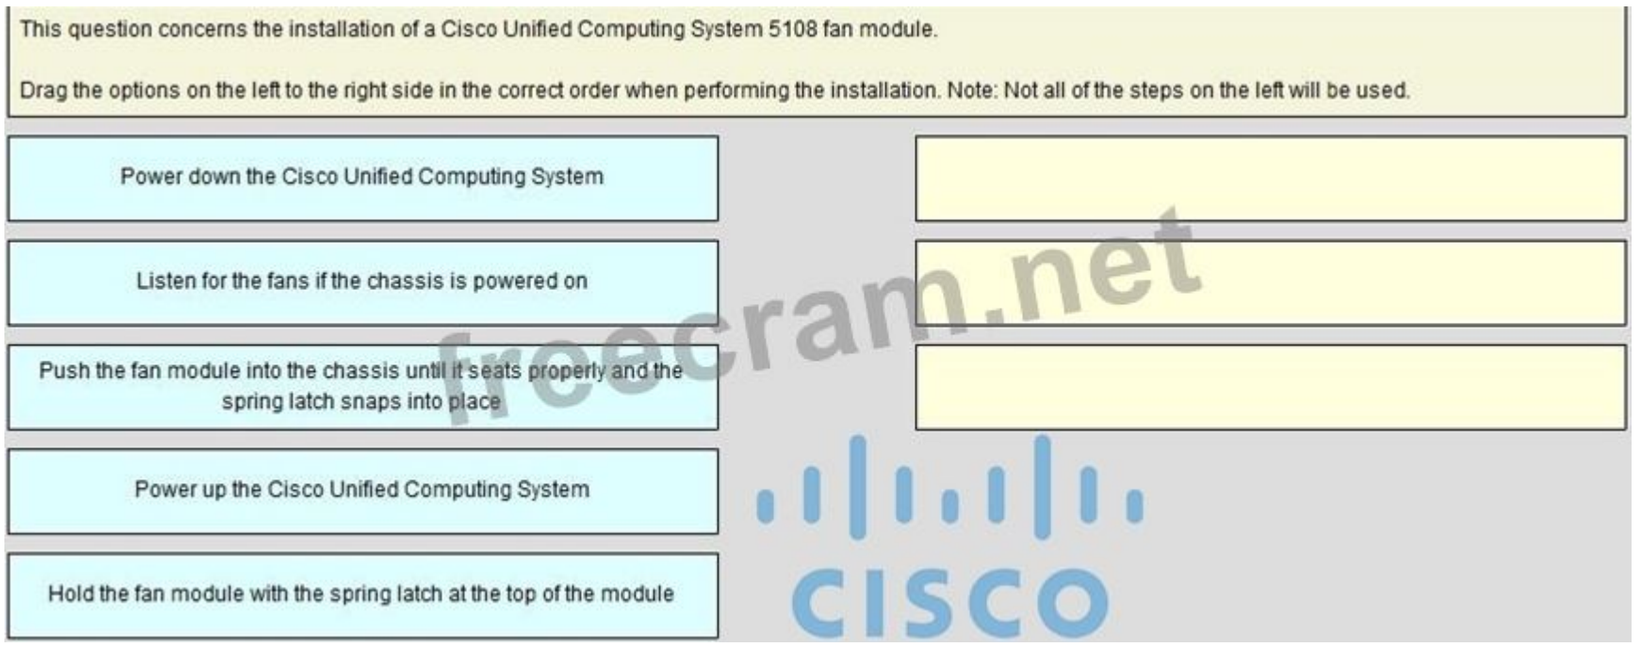

Answer:

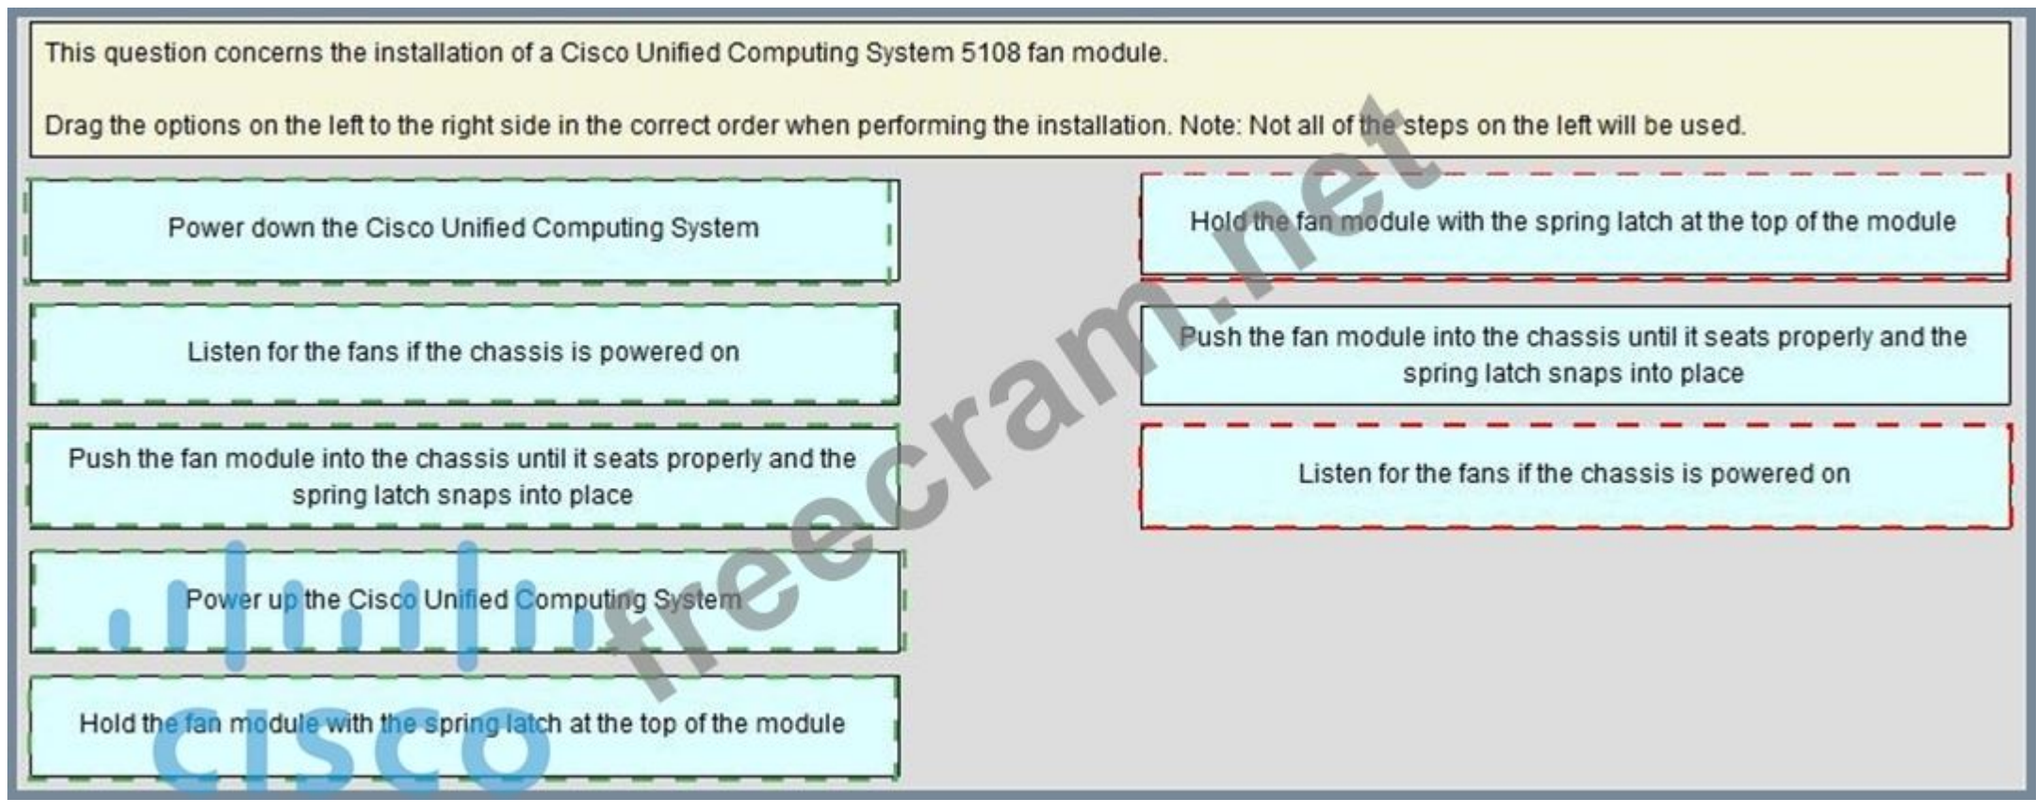

NEW QUESTION: 146

Scenario

In this scenario, you will refer to screenshots about Cisco UCS B-Series servers and UCS Manager.

Instructions

To access the multiple-choice questions, click on the numbered boxes on the left of the top panel.

There are four multiple-choice questions with this task.

Be sure to answer all four questions before selecting the Next button.


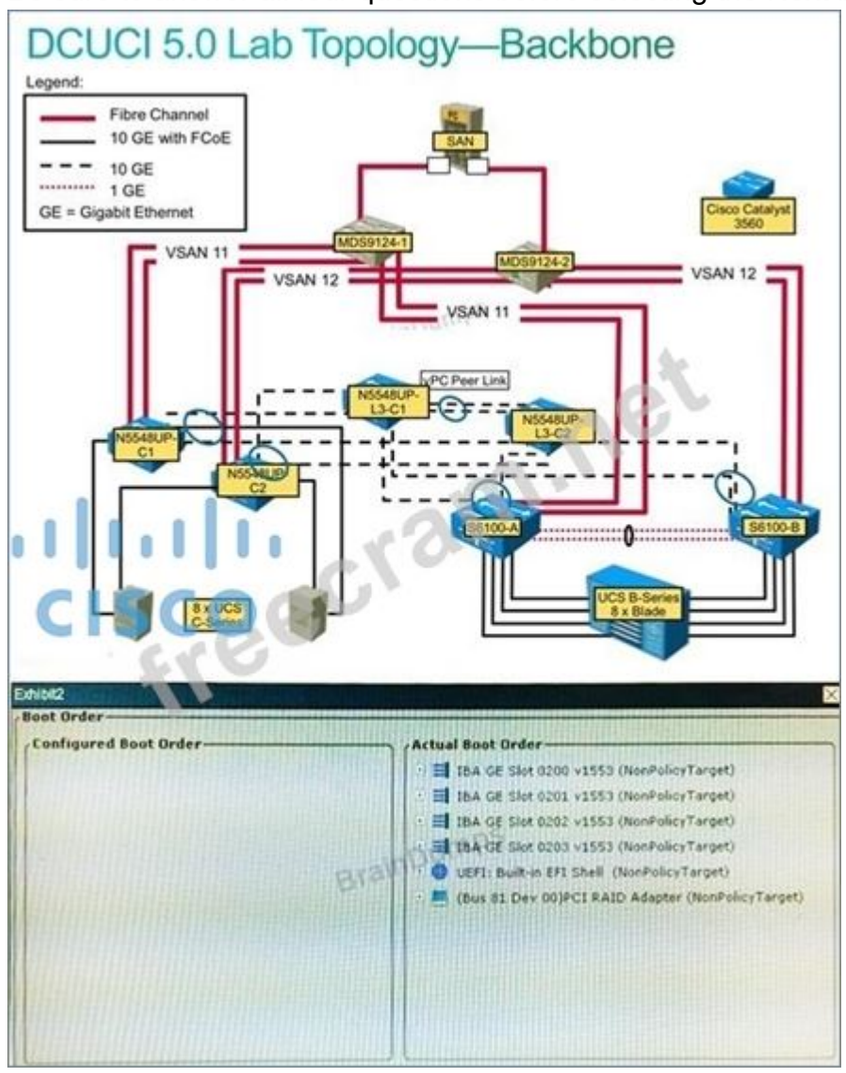



Exhibit5
cisco
User Details
User Properties
ID: 2
Enabled:
Username:
Role: read-only
Change Password:
New Password:
Confirm New Password:
Save Changes
Reset Values
Cancel

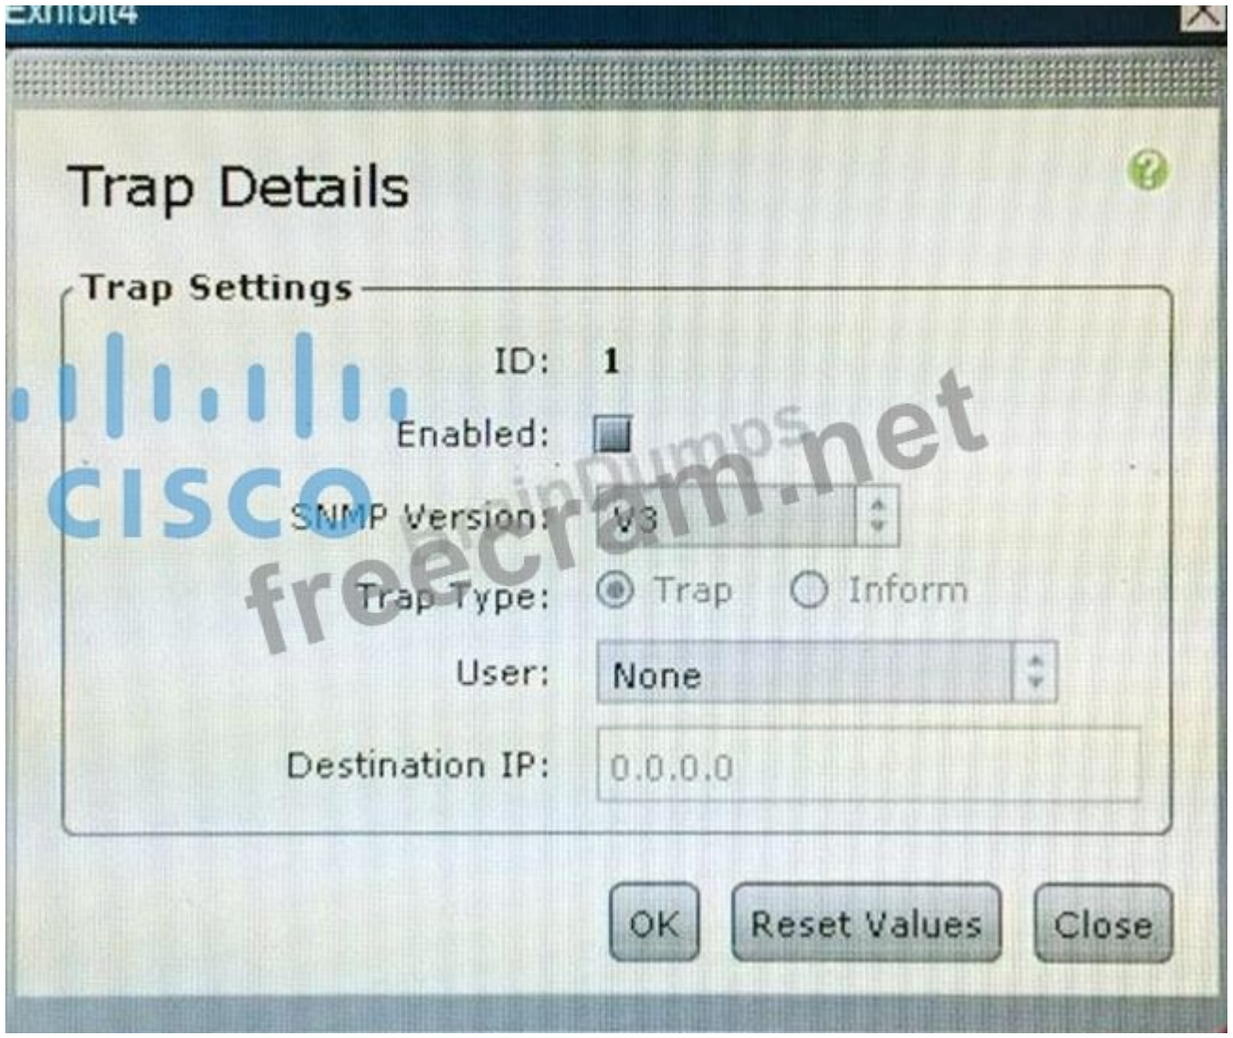

Refer to the screenshot in Exhibit 2. Which item is true about Boot Order in Cisco UCS - Series
Rack Servers?

A. The Boot Order set in the BIOS does not override the Cisco IMC.
B. Boot order configured in the BIOS will not be reflected in the Cisco IMC GUI.
C. Boot options should not be disabled in the BIOS.
D. Boot Order should only be configured in the Cisco IMC GUI.
Answer: (SHOW ANSWER)


NEW QUESTION: 147
Which three components perform the port extension functions for a Cisco UCS domain? (Choose three.)

A. the Cisco UCS 2208XP IOMs
B. the Cisco UCS VIC adapter that has VM-FEX and Adapter FEX technology
C. the Device Manager in Cisco Prime Data Center Network Manager
D. the multiprotocol port on the Cisco storage
E. the Cisco Nexus 2232PP FEX
F. the Cisco UCS Manager


Answer: (SHOW ANSWER)

NEW QUESTION: 148
Which Cisco UCS firmware are contained in the Cisco UCS Infrastructure software bundle?
(Choose three.)
A. Cisco UCS BIOS
B. Cisco I/O module firmware
C. Cisco UCS fabric interconnects firmware
D. Cisco UCS adapters
E. Cisco UCS Manager
F. Cisco IMC
Answer: (SHOW ANSWER)

NEW QUESTION: 149
DRAG DROP

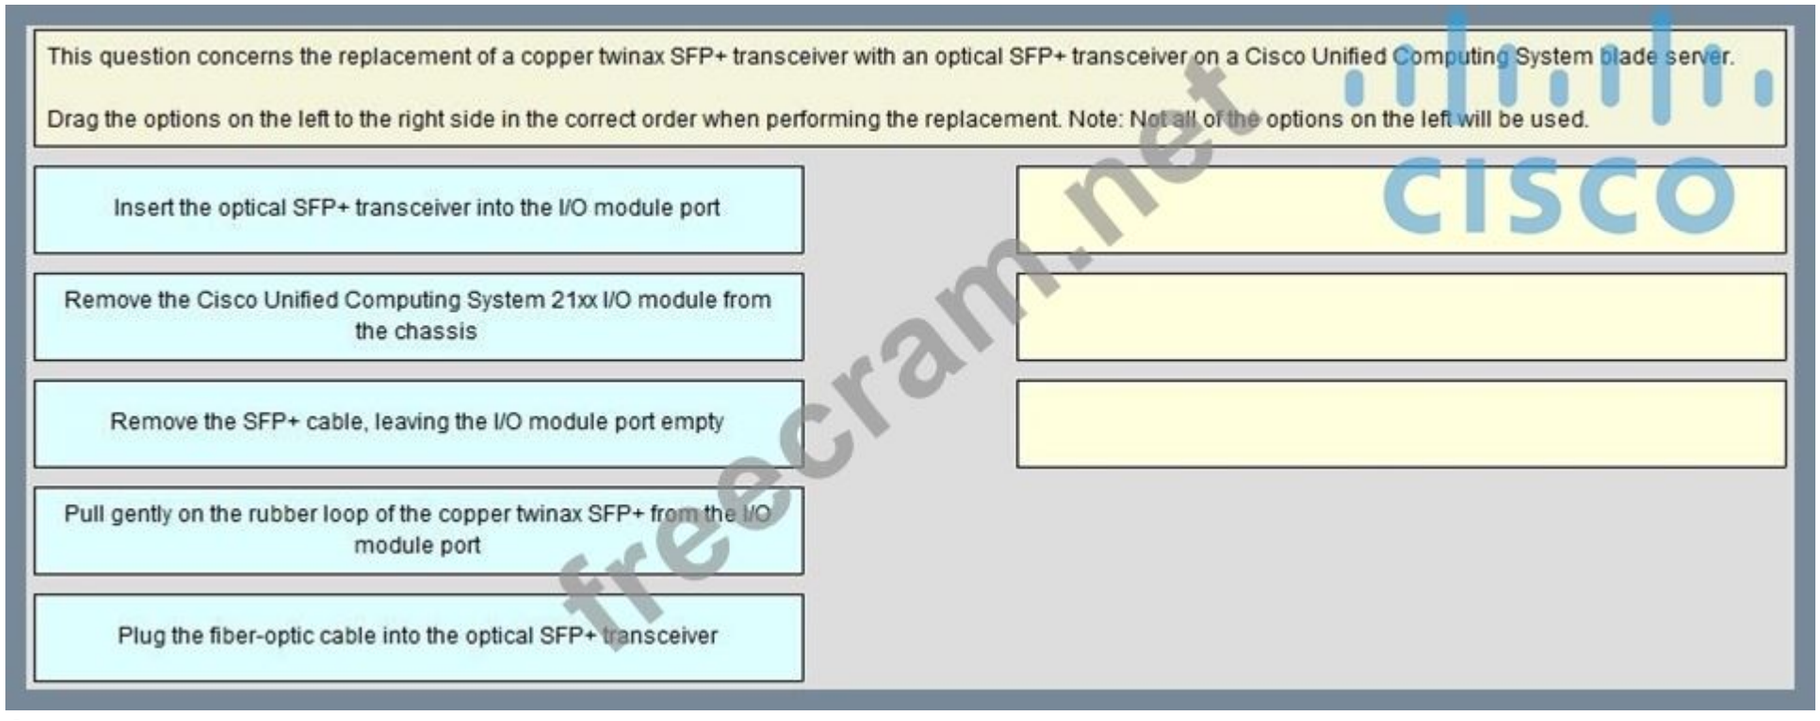

Answer:

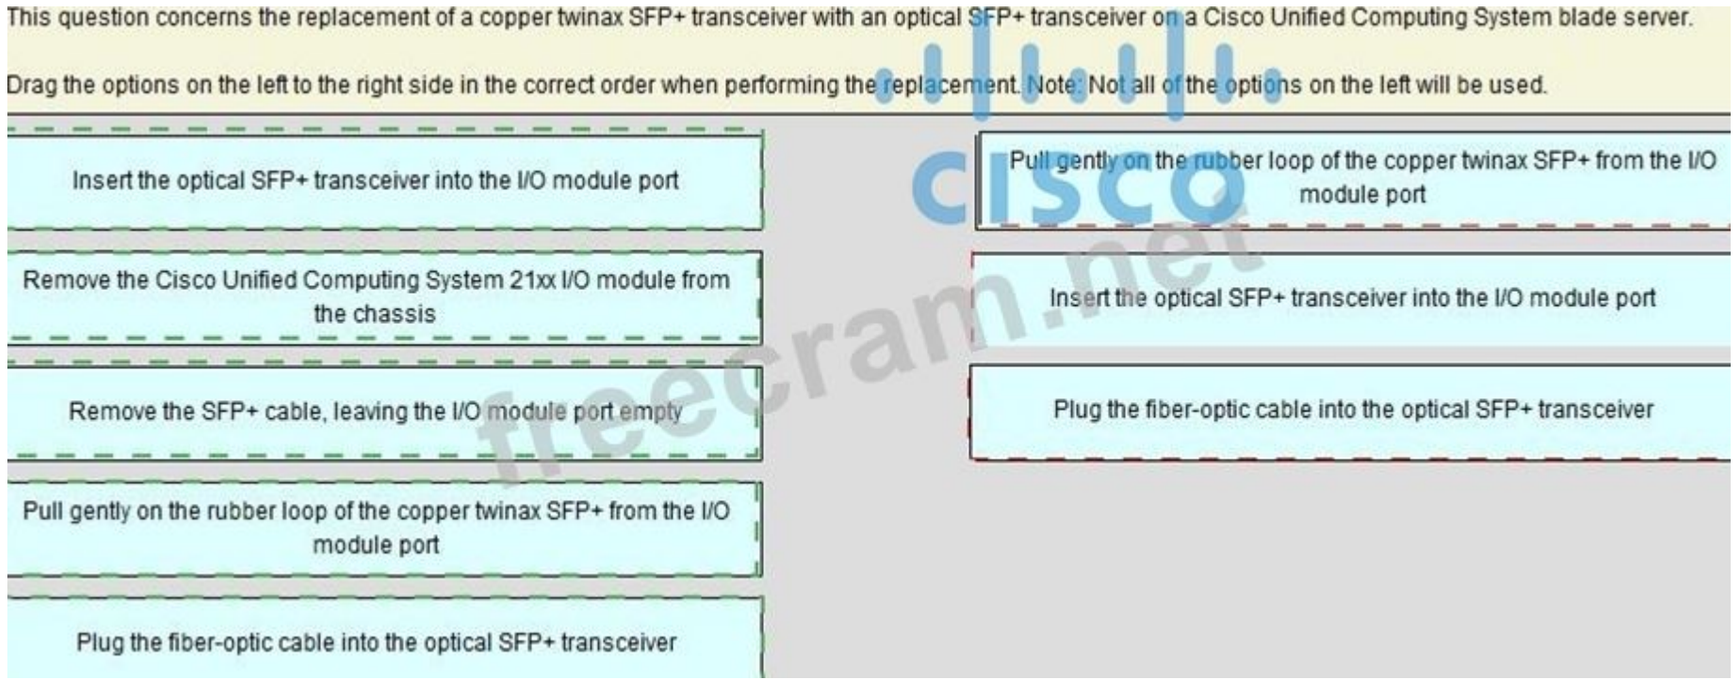

NEW QUESTION: 150

Which of the following is true with respect to hardware failover or NIC teaming within a Cisco Unified Computing System?

A. An uplink failure when using automatic pinning requires that hardware failover for the server vNIC be disabled.

B. The hardware failover option that is available for Ethernet does not affect Fibre Channel traffic.

C. Hardware failover is specified by the operating system.

D. NIC teaming is controlled by the vNIC.

Answer: (SHOW ANSWER)

NEW QUESTION: 151

Which Cisco UCS Manager feature allows you to specify multiple LDAP servers for user authentication?

A. Realm

B. Authentication Domain

C. Organization

D. LDAP Provider Group

Answer: (SHOW ANSWER)

Valid 300-175 Dumps shared by EduDump.com for Helping Passing 300-175 Exam! EduDump.com now offer the **newest 300-175 exam dumps**, the EduDump.com 300-175 exam **questions have been updated** and **answers have been corrected** get the **newest** EduDump.com 300-175 dumps with Test Engine here: https://www.edudump.com/exams/Cisco/300-175/premium/ (**175** Q&As Dumps, **35%OFF** **Special Discount Code: freecram**)

NEW QUESTION: 152

Which two parameters are used by Cisco UCS for automatic Fibre Channel uplink pinning?

A. hash algorithm
B. vHBA MAC address
C. server WWN
D. VSAN membership
E. MDS WWNN
Answer: (SHOW ANSWER)

NEW QUESTION: 153
You must upgrade a Cisco UCS -Series Server. Where must the Cisco UCS bundle image be located before you can begin the upgrade?
A. the Cisco Integrated Management Controller memory of the server
B. a USB drive connected to a Cisco UCS Fabric Interconnect
C. a TFTP server accessible to the Cisco UCS Fabric Interconnect
D. the flash file system of the fabric interconnect
Answer: (SHOW ANSWER)
Reference: http://www.cisco.com/c/en/us/td/docs/unified_computing/ucs/sw/firmware-mgmt/gui/21/b_GUI_Firmware_Management_21/downloading_and_managing_firmware_in _cisco_ucs_mana ger.html#concept_1923688E7A2E46239DCAE363E4A3DE81

NEW QUESTION: 154
Which of the following is not a feature of the Cisco Unified Computing System VIC-1280 adaptor?
A. compatible with the C- or B-Series Cisco Unified Computing System servers
B. supports FCoE
C. supports Cisco VM-FEX
D. capable of up to 256 virtual interfaces
Answer: (SHOW ANSWER)

NEW QUESTION: 155
You plan to use AAA security services for a Cisco UCS Fabric Interconnect.
Which two authentication protocols can you use? (Choose two.)
A. RADIUS
B. LDAP
C. Kerberos
D. Diameter
E. NTLM
Answer: (SHOW ANSWER)

NEW QUESTION: 156
Scenario
In this scenario, you will refer to screenshots about Cisco UCS B-Series servers and UCS Manager.
Instructions

To access the multiple-choice questions, click on the numbered boxes on the left of the top panel.

There are four multiple-choice questions with this task.

Be sure to answer all four questions before selecting the Next button.

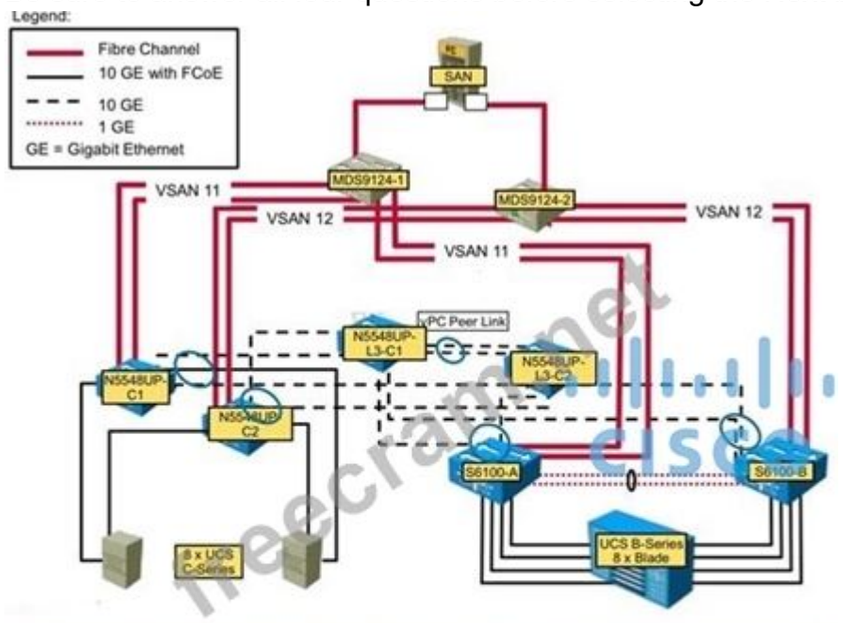


Exhibit2

```
interface Vethernet749
  description server 1/1, VNIC vNIC0
  switchport mode trunk
  untagged cos 4
  no pinning server sticky
  pinning server pinning-failure link-down
```

Exhibit3


Policies
root
Adapter Policies
BIOS Defaults
BIOS Policies
Boot Policies
Host Firmware Packages
IPMI Access Profiles
Local Disk Config Policies
Maintenance Policies
Management Firmware Packages
Memory Policy
Power Control Policies
Scrub Policies
Serial over LAN Policies
Server Pool Policies
Server Pool Policy Qualifications
Threshold Policies
iSCSI Authentication Profiles
vNIC/vHBA Placement Policies
Sub-Organizations



Which log would you view to determine which UCS Manager user modified a Service Profile?

A. Events

B. Audit

C. Syslog


D. SEL

Answer: (SHOW ANSWER)


Reference:
http://www.cisco.com/c/en/us/td/docs/unified_computing/ucs/sw/gui/config/guide/20/b_UCSM_GUI_Configuration_Guide_2_0/b_UCSM_GUI_Configuration_Guide_2_0_chapter_0101101.html

NEW QUESTION: 157

DRAG DROP

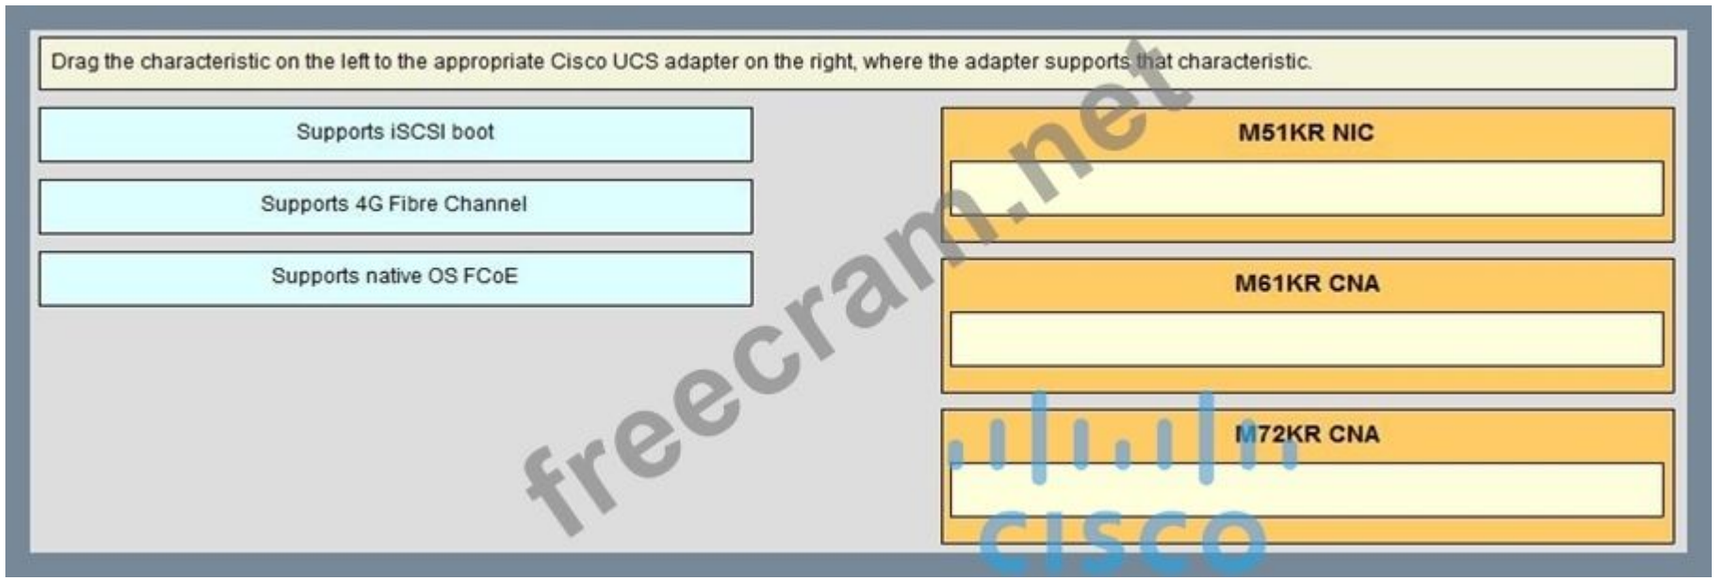


Answer:

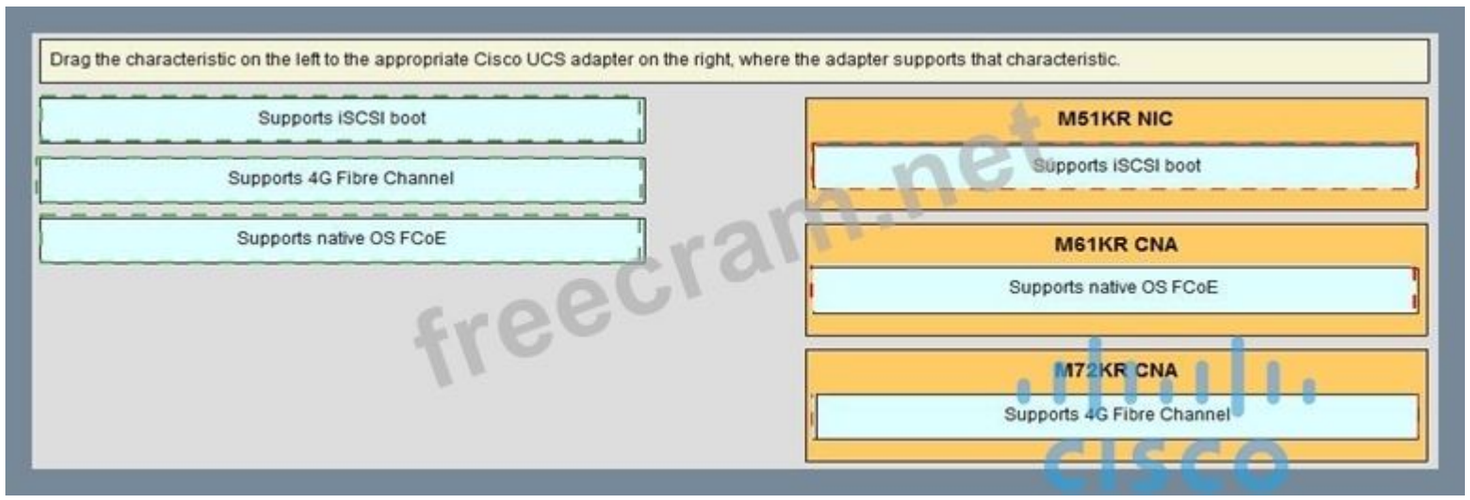


NEW QUESTION: 158
Which backup option must be used for a system restore?
A. all configuration
B. logical configuration
C. incremental
D. system configuration
E. full state
Answer: (SHOW ANSWER)

NEW QUESTION: 159
DRAG DROP
You need to upgrade the firmware on a Cisco UCS B-Series Blade Server system. Drag and drop the firmware packages on the left to the appropriate software bundle types on the right.

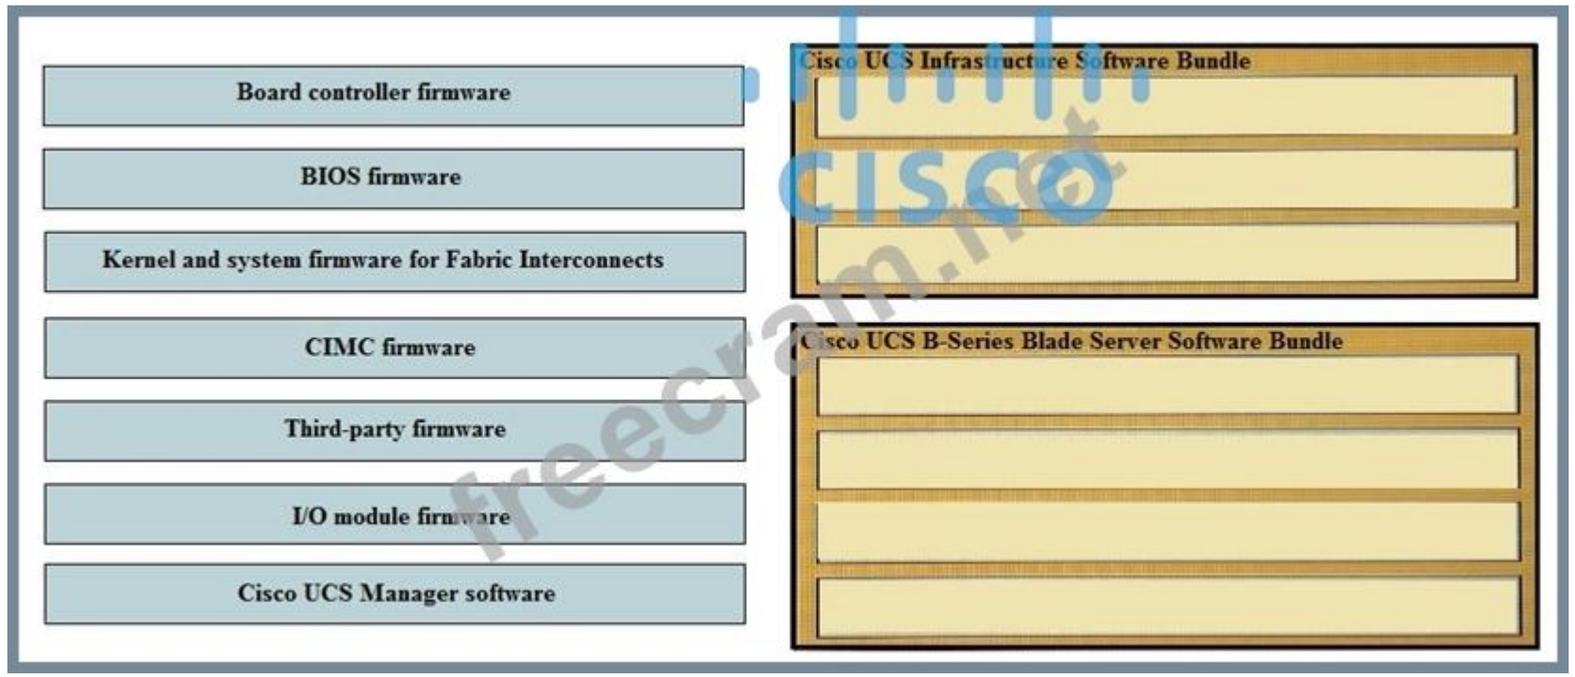

Answer:

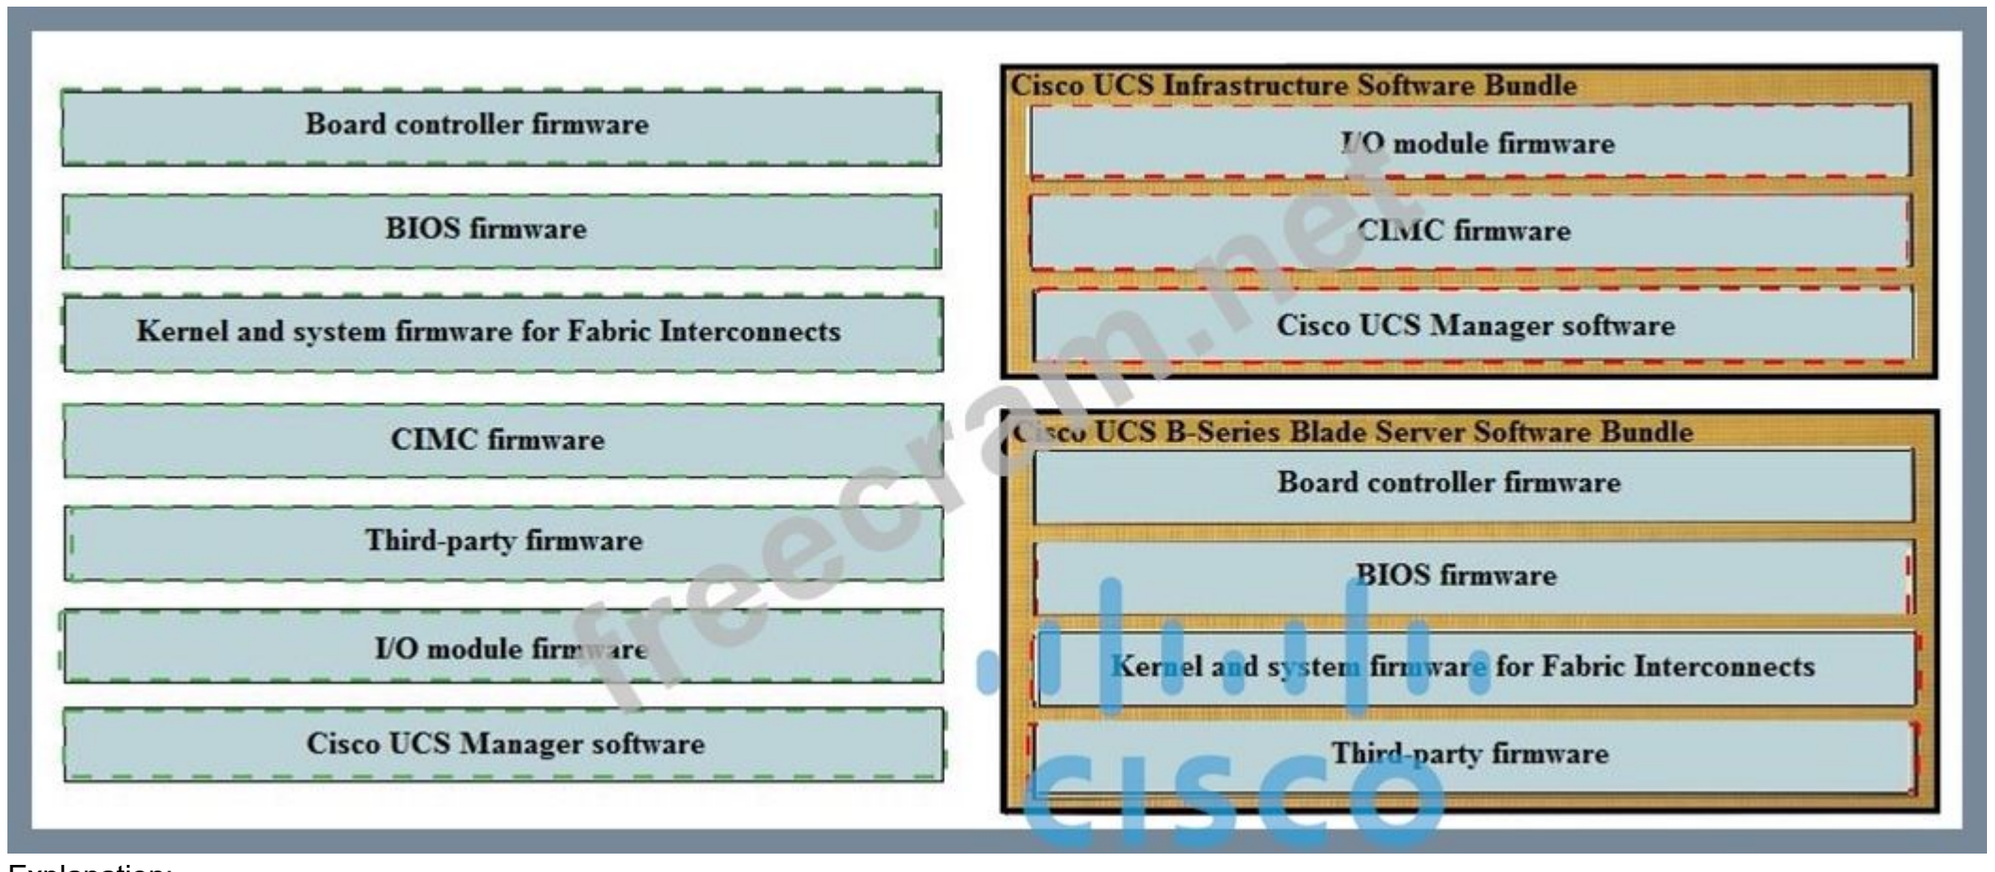

Explanation:

Cisco UCS Infrastructure Software Bundle

I/O module firmware

CIMC firmware

Cisco UCS Manager firmware

Cisco UCS B-series Blade Server Software Bundle

Board controller firmware
BIOS firmware
Kernel and system firmware for Fabric Interconnects
Third-party firmware

NEW QUESTION: 160

Freecram.net

Which of the following is true concerning the Global Chassis Discovery policy configuration on the Cisco Unified Computing System Manager when using Cisco Unified Computing System 22XX I/O modules with Cisco UCS 62XX Fabric Interconnects?

A. The link grouping preference should be set to discrete mode when the number of northbound links are not a power of 2.
B. Automatic reacknowledgement due to chassis discovery is never disruptive.
C. For Cisco Unified Computing System implementations that mix I/O modules with different numbers of links, it is best to manually reacknowledge the chassis in order to use all available links.
D. Set the action policy-count higher than the actual number of uplinks; otherwise, the Cisco Unified Computing System servers will not be discovered.
Answer: C (LEAVE A REPLY)

NEW QUESTION: 161

Which two policies can specify that a port channel be configured between the fabric extender and fabric interconnect? (Choose two.)
A. chassis or fabric extender discovery policy
B. rack server discovery policy
C. rack management connection policy
D. server inheritance policies
E. autoconfig policies
F. chassis connectivity policy
Answer: (SHOW ANSWER)
Reference:
http://www.cisco.com/c/en/us/td/docs/unified_computing/ucs/sw/gui/config/guide/20/b_UCSM_GUI_Configuration_Guide_2_0/b_UCSM_GUI_Configuration_Guide_2_0_chapter_01100.html

NEW QUESTION: 162

Which backup option must be performed from the Cisco UCS Manager to allow for a system restore?
A. database backup
B. Logical configuration
C. System configuration
D. Full state
E. All configuration
Answer: (SHOW ANSWER)
Reference:
http://www.cisco.com/en/US/docs/unified_computing/ucs/sw/gui/config/guide/141/UCSM_G

UI_Co nfiguration_Guide_141_chapter43.html

NEW QUESTION: 163
Which three items are supported operating systems of the Cisco VM-FEX universal passthrough? (Choose three.)
A. Microsoft Windows Server 2008
B. SLES 11
C. Red Hat Enterprise Linux 6.0
D. Ubuntu Server 12.2
E. Oracle Solaris 11
F. Microsoft Windows Server 2003 SP3
Answer: A,B,C (LEAVE A REPLY)

NEW QUESTION: 164
At a customer site, a Cisco UCS cluster must be renamed due to a domain name change.
You need to recommend a solution to ensure that Cisco UCS Manager can be accessed over HTTPS.
Which solution accomplishes this goal?
A. The default key ring certificate must he renewed automatically when the name changes.
B. The default key ring certificate must be regenerated manually.
C. The cluster must be reinstalled, in order to generate the default key ring certificate.
D. A default key ring certificate regeneration request must be issued from Cisco UCS Manager.
Answer: (SHOW ANSWER)

NEW QUESTION: 165
You are configuring integration between the Cisco UCS Manager and the VMware vCenter Server
Appliance. Which three actions must you perform from the Cisco Configure VMware Integration
Wizard? (Choose three.)
A. Define the virtual machine port profile in the Cisco UCS Manager for virtual machine traffic.
B. Install and register the Cisco UCS Manager extension as a plug-in in the VMware vCenter.
C. Install and register the VMware VM Console plug-in in the Cisco UCS Manager.
D. Apply a port profile (port group) to the virtual machines on the VMware vCenter server.
E. Apply the Firewall Services Module UCS service profile to Cisco UCS B-Series Blade Server.
F. Apply a fabric profile to both Cisco Fabric Interconnect uplink ports.
Answer: (SHOW ANSWER)
Reference:
http://www.cisco.com/c/en/us/td/docs/unified_computing/ucs/sw/vm_fex/vmware/gui/config_guide/
2-2/b_GUI_VMware_VM-FEX_UCSM_Configuration_Guide_2_2/b_GUI_VMware_VM-FEX_UCSM_Configuration_Guide_2_2_1_chapter_0100.html


NEW QUESTION: 166
You are configuring service profiles for a Cisco UCS system.
What are three types of logical resource pools? (Choose three.)
A. MAC
B. WWN
C. UUID
D. VXLAN
E. VLAN
F. FC
Answer: (SHOW ANSWER)

Valid 300-175 Dumps shared by EduDump.com for Helping Passing 300-175 Exam! EduDump.com now offer the **newest 300-175 exam dumps**, the EduDump.com 300-175 exam **questions have been updated** and **answers have been corrected** get the **newest** EduDump.com 300-175 dumps with Test Engine here:
https://www.edudump.com/exams/Cisco/300-175/premium/ (**175** Q&As Dumps, **35%OFF** **Special Discount Code:** **freecram**)


NEW QUESTION: 167
Which Cisco UCS blade server supports the highest I/O throughput?
A. Cisco UCS B22 M3 Blade Server
B. Cisco UCS B200 M3 Blade Server
C. Cisco UCS B420 M3 Blade Server
D. Cisco UCS B200 M4 Blade Server
Answer: (SHOW ANSWER)

NEW QUESTION: 168
Which item is required for communication between Cisco Unified Computing System Manager and VMware vCenter?
A. WMware vCenter Certificate Services
B. VeriSign Digital Certificates
C. RSA Digital Certificates
D. Cisco Unified Computing System Manager Extension Key
E. VeriSign Plug-In
Answer: D (LEAVE A REPLY)

NEW QUESTION: 169
DRAG DROP

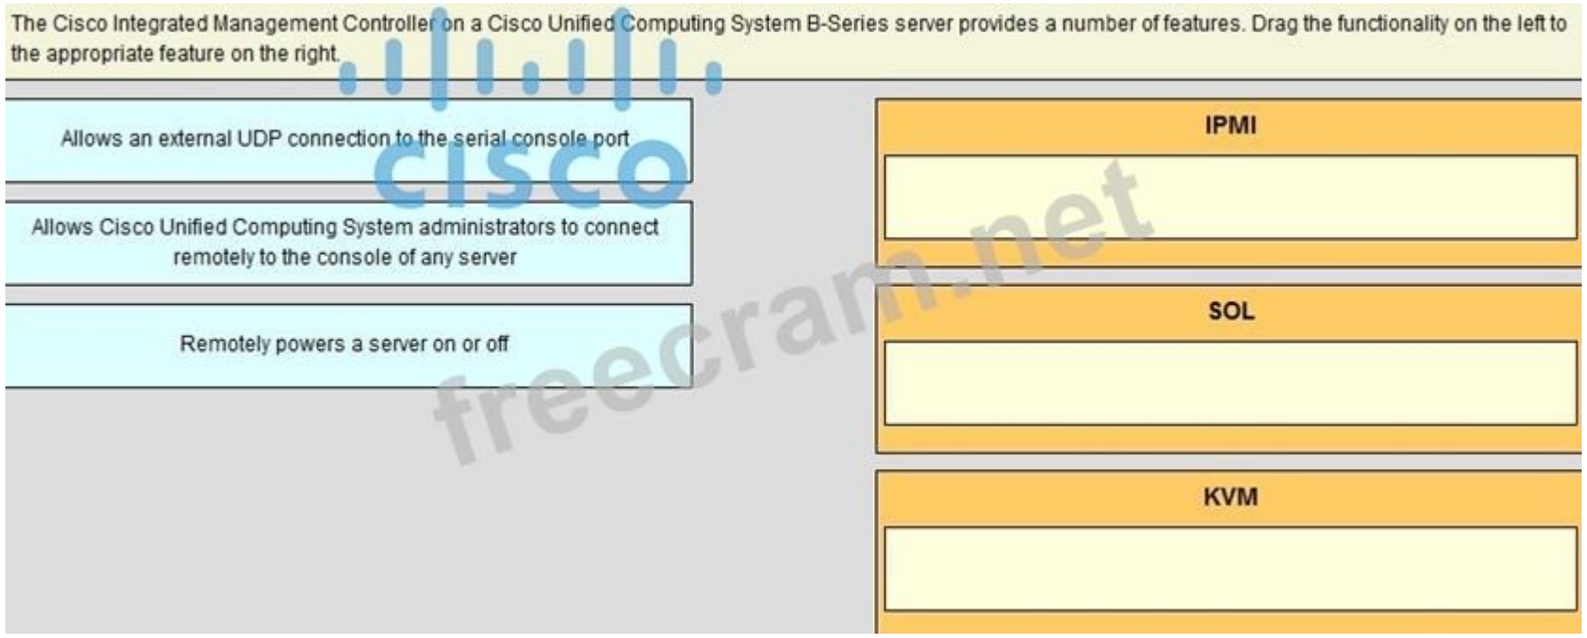

Answer:

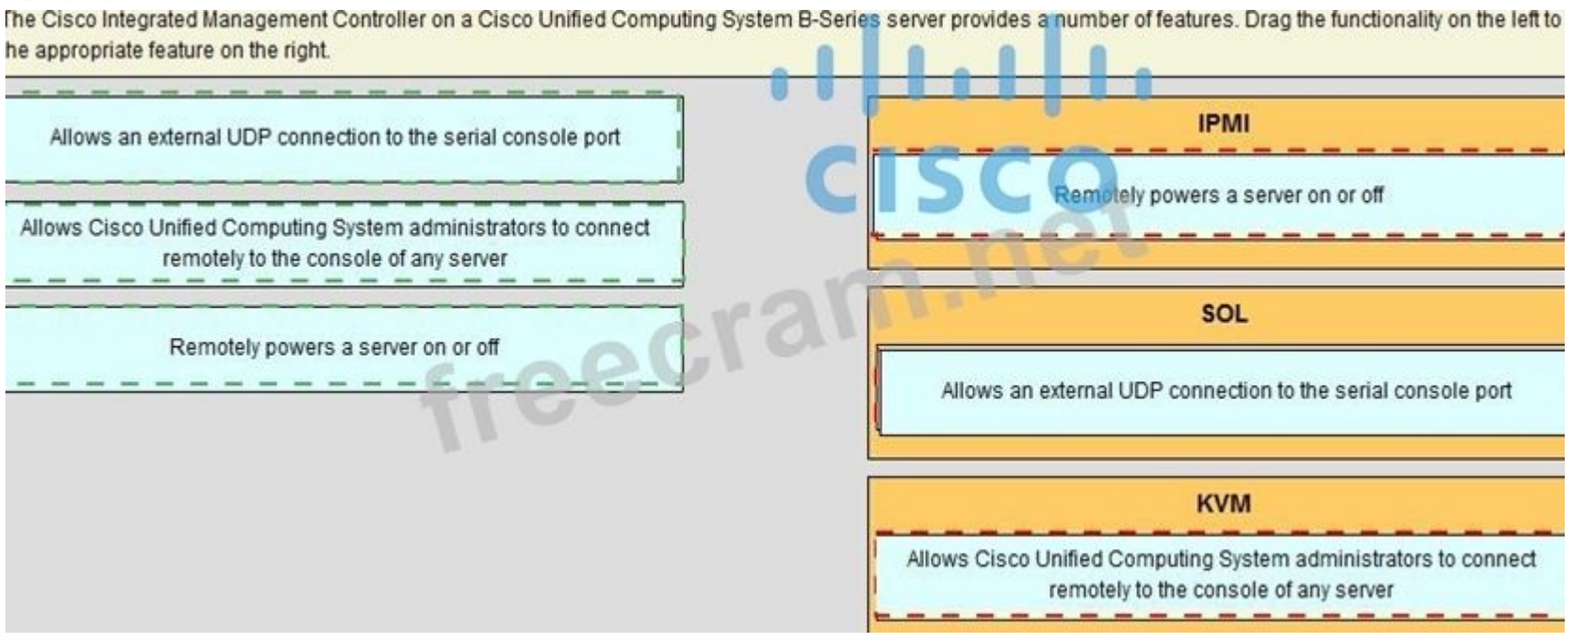

NEW QUESTION: 170

Which statement about an iSCSI vNIC when it is created with an overlay NIC is true?

A. It can have any VLAN allowed on it.

B. It can be assigned a unique MAC address.

C. It can have only the overlays native VLAN associated to it.

D. It can have a unique pin group assigned to it.

Answer: (SHOW ANSWER)

NEW QUESTION: 171

A Cisco UCS Administrator is planning to complete a firmware upgrade using Auto install.

Which two options are prerequisites to run Auto install? (Choose two.)

A. time synchronization
B. configuration backup
C. minor fault fixing
D. fault suppression started on the blade servers
E. service profiles unmounted from the blade servers
Answer: (SHOW ANSWER)

NEW QUESTION: 172
Which technology makes VM-FEX possible?
A. VNTAG
B. VXLAN
C. DVS
D. VPC
Answer: (SHOW ANSWER)

NEW QUESTION: 173
You are creating service profiles for a Cisco UCS system by using the service profile wizard. You discover that you forgot to create the UUID pool.
What should you do?
A. Pause the running wizard, and then start a temporary wizard to create a profile with the same name and the missing UUID pool. Resume the wizard, and then select the new UUID pool.
B. Continue running the wizard. The service profile uses the burned-in UUID in the BIOS of the server.
C. Stop the wizard, and then restart the wizard.
D. From the wizard, click Create UUID Suffix Pool.
Answer: (SHOW ANSWER)

NEW QUESTION: 174
You configure FCoE in a Cisco UCS system at a customer site. The configuration seems correct, but the customer complains that the system fails to perform as expected.
FCoE
VLAN discovery, FCF discovery and FLOGI processes work properly. The issue appears to be with the Fibre Channel commands and responses.
What is a possible cause of the issue?
A. The switched Layer 2 network between the FCoE SAN and the storage device is experiencing issues when the FIP process fails to complete successfully.
B. The routed Layer 3 network between the FCoE SAN and the storage device is experiencing issues when the FIP process fails to complete successfully.
C. The FCoE configuration is experiencing errors because of issues with the Fibre Channel commends.
D. The storage device is experiencing configuration or compatibility issues when the FIP process completes successfully.
Answer: (SHOW ANSWER)

NEW QUESTION: 175
Which two protocols are accepted by the Cisco UCS Manager XML API? (Choose two.)
A. SNMP
B. SMASH
C. HTTPS

D. HTTP
E. XMTP
Answer: (SHOW ANSWER)

NEW QUESTION: 176
You need to install Cisco UCS Central Software at a customer site and set it up to manage Cisco UCS Manager.
What should you do to accomplish this goal?
A. Register the same Cisco UCS equipment that is managed by Cisco UCS Manager, and Cisco UCS Manager itself, in Cisco UCS Central Software.
B. Register Cisco UCS Manager in Cisco UCS Central Software.
C. Register the Cisco UCS domains in Cisco UCS Central Software.
D. Register Cisco UCS Central Software in Cisco UCS Manager.
Answer: (SHOW ANSWER)

NEW QUESTION: 177
Which consideration must be made while utilizing the UEFI boot mode?
A. The service profile cannot be disassociated without decommissioning the blade.
B. This mode applies only to models before the M3.
C. This mode replaces the UEFI shell typically available as a boot fallback.
D. Legacy boot modes cannot be used on the same server.
Answer: (SHOW ANSWER)

NEW QUESTION: 178
What are the three main components of the VM-FEX environment? (Choose three.)
A. Red Hat Network Satellite server
B. ESX host with Cisco UCS M81KR VIC
C. Cisco VSG
D. Cisco UCS Manager
E. VMware vCenter
F. ESX host with Cisco UCS M72KR CAN
G. VMware Update Manager
Answer: (SHOW ANSWER)

NEW QUESTION: 179
An admin wants to make sure that for each VLAN added to a vNIC, a static MAC address entry is added to the fabric interconnect. Which setting within Cisco UCS Manager accomplishes this task?
A. The MAC Register Mode in the link protocol policy is set to All Host VLANs.
B. The MAC Register Mode in the LAN connectivity policy is set to All Host VLANs.
C. The MAC Register Mode in the network control policy is set to Only Native VLAN.
D. The MAC Register Mode in the link protocol policy is set to Only Native VLAN.

E. The MAC Register Mode in the LAN connectivity policy is set to Only Native VLAN.
F. The MAC Register Mode in the network control policy is set to All Host VLANs.
Answer: (SHOW ANSWER)

NEW QUESTION: 180
Which policy would you change to form a port channel between a Cisco UCS 6248 and a Cisco UCS 2208?
FreeCram.net
A. IOM connection policy
B. link aggregation policy
C. link discovery policy
D. chassis discovery policy
Answer: (SHOW ANSWER)

NEW QUESTION: 181
Which two are true with respect to the switching modes on the Cisco Unified Computing System 62XX Fabric Interconnect? (Choose two.)
A. A MAC forwarding table is not used to forward traffic to the uplink switch.
B. For northbound traffic, server MAC addresses are statically pinned to an uplink; the return path is controlled by the unified fabric switches.
C. Server-to-server traffic on a common VLAN are locally switched by the fabric interconnect and not the northbound switches.
D. A MAC address forwarding table is maintained for server-to-server communications across VLANs.
E. A fabric interconnect port in Ethernet switching mode appears to the uplink switch as a host with many MAC addresses.
F. End-host mode presents a link to a northbound uplink switch as a host trunk with loop detection that is provided by STP.
Answer: (SHOW ANSWER)

Valid 300-175 Dumps shared by EduDump.com for Helping Passing 300-175 Exam! EduDump.com now offer the **newest 300-175 exam dumps**, the EduDump.com 300-175 exam **questions have been updated** and **answers have been corrected** get the **newest** EduDump.com 300-175 dumps with Test Engine here: https://www.edudump.com/exams/Cisco/300-175/premium/ (**175** Q&As Dumps, **35%OFF** **Special Discount Code:** **freecram**)

NEW QUESTION: 182
Which two policies can be configured in a port profile for VM-FEX high-performance mode? (Choose two.)
A. network control policy
B. vNIC connection policy
C. QoS policy
D. adapter policy
E. BIOS policy
Answer: (SHOW ANSWER)

NEW QUESTION: 183

You have a Cisco UCS C-Series Server. What can you use to log the blade server statistics?
A. the Cisco Integrated Management Controller log
B. RADIUS
C. LDAP
D. the XML API
Answer: A (LEAVE A REPLY)
Reference: http://www.cisco.com/c/en/us/products/collateral/servers-unified-computing/ucs- cseries-rack-servers/datasheet-c78-733571.html

NEW QUESTION: 184
Which two of the listed BIOS options are required for VM-FEX in high performance mode?
(Choose two.)
A. cache validation
B. interrupt coherency
C. ATS support
D. virtualization technology
E. RSS
Answer: (SHOW ANSWER)

NEW QUESTION: 185
What is true statement concerning port personalities on the Cisco Unified Computing
System 62XX Fabric Interconnect?
A. Fibre Channel uplink ports must operate in Fibre Channel switching mode.
B. The Fibre Channel storage ports support VSAN trunking and Fibre Channel port channels.
C. The Fibre Channel uplink ports do not support VSAN trunking and Fibre Channel port channels.
D. The fabric interconnects use native FCoE storage ports to directly attach to the SAN infrastructure.
E. By default, all Fibre Channel ports are unconfigured.
Answer: (SHOW ANSWER)

NEW QUESTION: 186
Refer to the exhibit.

```
FI-B(nxos)# show ip igmp snooping vlan 100
 IGMP Snooping information for vlan 100
   IGMP snooping enabled
   Optimised Multicast Flood (OMF) disabled
   IGMP querier none
   Switch-querier disabled
   IGMPv3 Explicit tracking enabled
   IGMPv2 Fast leave disabled
   IGMPv1/v2 Report suppression enabled
   IGMPv3 Report suppression disabled
   Link Local Groups suppression enabled
   Router port detection using PIM Hellos, IGMP Queries
   Number of router-ports: 0
   Number of groups: 0
   VLAN vPC function disabled
   Active ports:
     Eth1/20      Eth1/32 Po1      Po21
     Po22         Po30
```

Based on the output, which statement about the fabric interconnect is true?

A. 10 groups in the fabric interconnect have been configured for VLAN 100 access.

B. After adding VLAN 100, no other changes were made.

C. IGMP snooping was enabled by the admin for VLAN 100.

D. The fabric interconnect floods multicast traffic in VLAN 100.

Answer: (SHOW ANSWER)

NEW QUESTION: 187

Scenario

In this scenario, you will refer to screenshots about Cisco UCS B-Series servers and UCS Manager.

Instructions

To access the multiple-choice questions, click on the numbered boxes on the left of the top panel.

There are four multiple-choice questions with this task.

Be sure to answer all four questions before selecting the Next button.


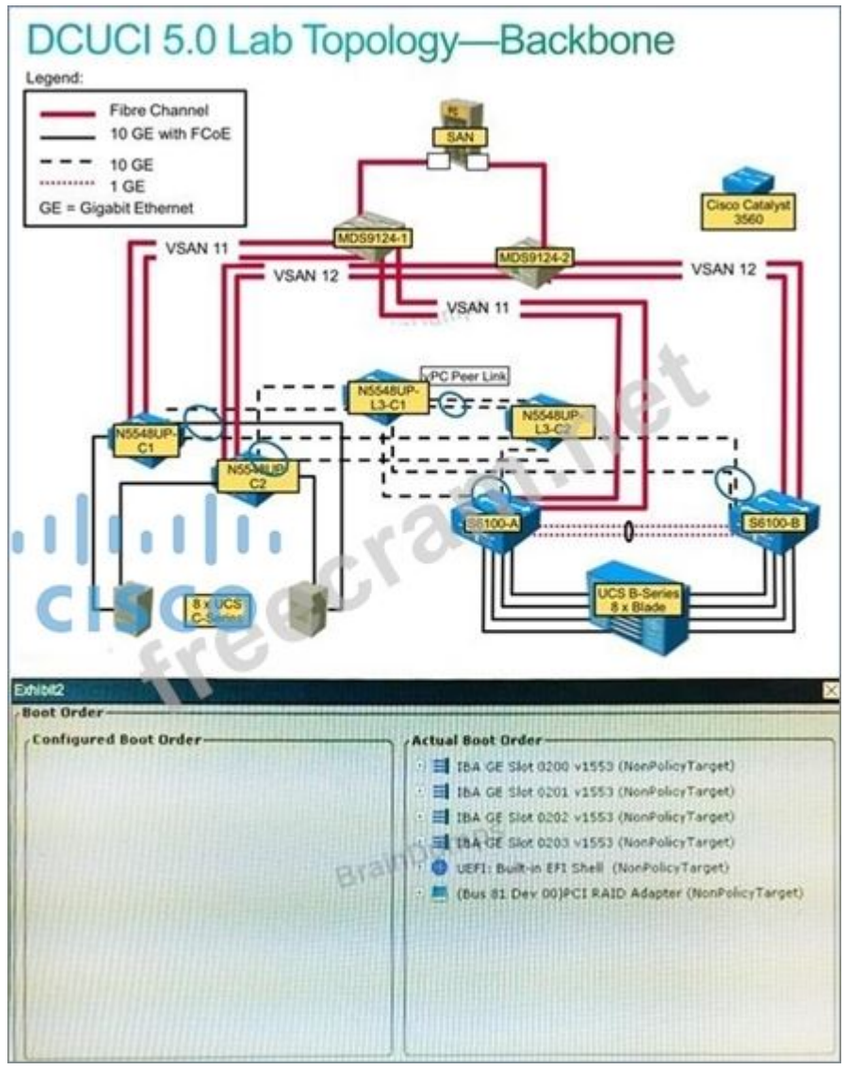

DCUCI 5.0 Lab Topology—Backbone
Legend:
Fibre Channel
10 GE with FCoE
10 GE
1 GE
GE = Gigabit Ethernet
SAN
Cisco Catalyst 3560
MDS9124-1
MDS9124-2
VSAN 11
VSAN 12
VSAN 12
VSAN 11
vPC Peer Link
N5548UP-L3-C1
N5548UP-L3-C2
N5548UP-C1
N5548UP-C2
S6100-A
S6100-B
UCS B-Series 8 x Blade
8 x UCS C-Series
Exhibit2
Boot Order
Configured Boot Order
Actual Boot Order
IBA GE Slot 0200 v1553 (NonPolicyTarget)
IBA GE Slot 0201 v1553 (NonPolicyTarget)
IBA GE Slot 0202 v1553 (NonPolicyTarget)
IBA GE Slot 0203 v1553 (NonPolicyTarget)
UEFI: Built-in EFI Shell (NonPolicyTarget)
(Bus 81 Dev 00)PCI RAID Adapter (NonPolicyTarget)


Exhibit5
cisco
User Details
User Properties
ID: 2
Enabled:
Username:
Role: read-only
Change Password:
New Password:
Confirm New Password:
Save Changes
Reset Values
Cancel

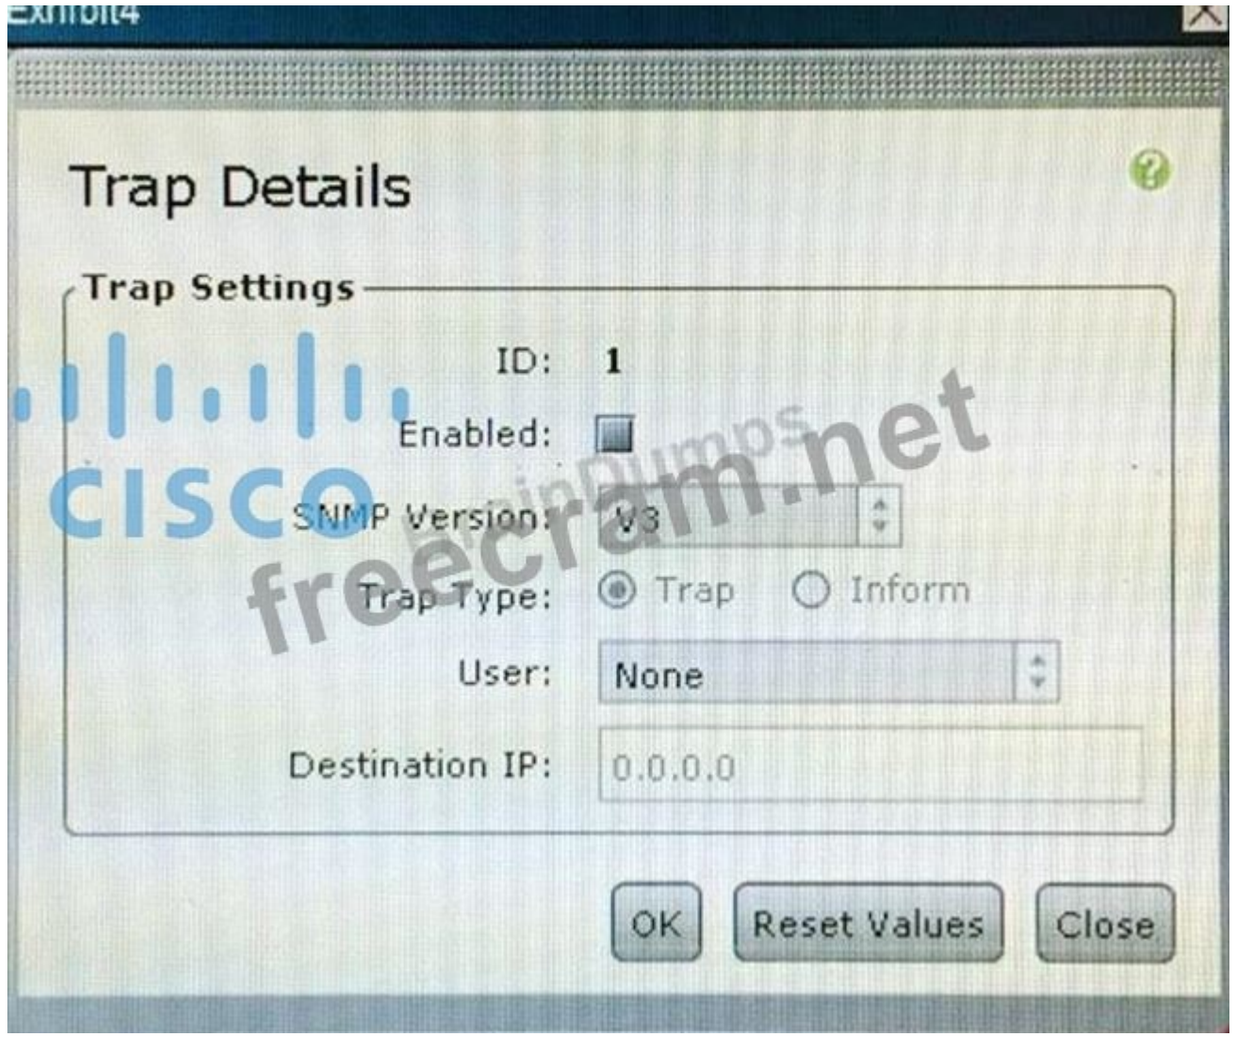

Refer to the screenshot in Exhibit 4. Once you enable an SNMP Trap destination, which SNMP
Version is required to configure the Inform Trap Type?

A. 1
B. 2
C. 2c
D. 3

Answer: (SHOW ANSWER)

Reference:
http://www.cisco.com/c/en/us/td/docs/switches/datacenter/sw/5_x/nxos/system_manageme nt/configuration/guide/sm_nx_os_cg/sm_9snmp.html

NEW QUESTION: 188

An engineer is performing firmware upgrades through Cisco USC Manager.
Which firmware upgrade causes the server to be powered off during the upgrade and powered on after the upgrade is complete?

A. board controller
B. adapter
C. BIOS
D. storage controller

Answer: (SHOW ANSWER)

NEW QUESTION: 189
You plan to configure a SAN boot from the iSCSI storage of a Cisco UCS system.
Which statement about an iSCSI vNIC is true?
A. Only iSCSI control date traffic is carried over the vNIC after the boot.
B. All iSCSI data traffic is carried over the vNIC after the boot.
C. An iSCSI vNIC is an iBFT configuration placeholder for the iSCSI boot configuration.
The vNIC exists only during the startup phase.
D. An iSCSI vNIC is an iBFT configuration placeholder for the iSCSI boot process. The vNIC exists during and after the startup phase.
Answer: (SHOW ANSWER)

NEW QUESTION: 190
When a configuration change requires a reboot, which policy specifies how Cisco UCS manager should proceed?
Freecram.net
A. maintenance policy
B. local disk policy
C. boot policy
D. host firmware policy
Answer: (SHOW ANSWER)

NEW QUESTION: 191
Which NIC redundancy modes allow the LOMs to be discovered by the operating system or hypervisor?
A. Cisco Card Mode
B. Dedicated mode
C. Active/Active
D. Active/Standby
Answer: (SHOW ANSWER)

NEW QUESTION: 192
When adding a VMware ESXi host to the Distributed Virtual Switch, what are two risks of migrating a VMNIC that is associated to vSwitch 0? (Choose two.)
A. DVS port group will overwrite the port groups in vSwitch 0
B. duplicate MAC address error
C. loss of access to the management IP interface
D. duplicate IP address error
E. DVS port group will not appear in the VM network settings
F. loss of VMware ESXi communication with VMware vCenter
Answer: (SHOW ANSWER)

NEW QUESTION: 193
Which two VMware features must be turned off in the data center cluster for Cisco VM-FEX universal passthrough to operate? (Choose two.)

A. HA
B. FT
C. VMCI
D. DRS
E. vMotion
Answer: (SHOW ANSWER)

NEW QUESTION: 194
Which two settings are required when utilizing DirectPath I/O? (Choose two.)
A. Set port profile performance to "high".
B. Enable VMQ with the "enable-netadaptervmq" cmdlet.
C. adapter profile update
D. VM queue modification
E. full memory reservation
F. CPU pinning
G. Install DirectPath VIB on host.
H. vCPU pinning
Answer: (SHOW ANSWER)

NEW QUESTION: 195
You need to provision iSCSI initiator IP pools on a Cisco UCS system.
How many iSCSI vNICs can you use per boot policy?
A. 2
B. 6
C. 4
D. 8
Answer: (SHOW ANSWER)

NEW QUESTION: 196
Which three parameters can be configured for a vHBA? (Choose three.)
A. Enable persistent binding.
B. Enable a hardware-based failover.
C. Define a SAN pin group
D. Assign a QoS policy.
E. Define an MTU.
F. Assign a MAC address.
Answer: (SHOW ANSWER)
Reference:
http://www.cisco.com/c/en/us/td/docs/unified_computing/ucs/sw/gui/config/guide/21/b_UCSM_GUI_Configuration_Guide_2_1/b_UCSM_GUI_Configuration_Guide_2_1_chapter_011010.html

Valid 300-175 Dumps shared by EduDump.com for Helping Passing 300-175 Exam! EduDump.com now offer the **newest 300-175 exam dumps**, the EduDump.com 300-175 exam **questions have been updated** and **answers have been corrected** get the **newest** EduDump.com 300-175 dumps with Test Engine here: https://www.edudump.com/exams/Cisco/300-175/premium/ (**175** Q&As Dumps, **35%OFF** **Special Discount Code:** **freecram**)

NEW QUESTION: 197

Scenario

In this scenario, you will refer to screenshots about Cisco UCS B-Series servers and UCS Manager.

Instructions

To access the multiple-choice questions, click on the numbered boxes on the left of the top panel.

There are four multiple-choice questions with this task.

Be sure to answer all four questions before selecting the Next button.


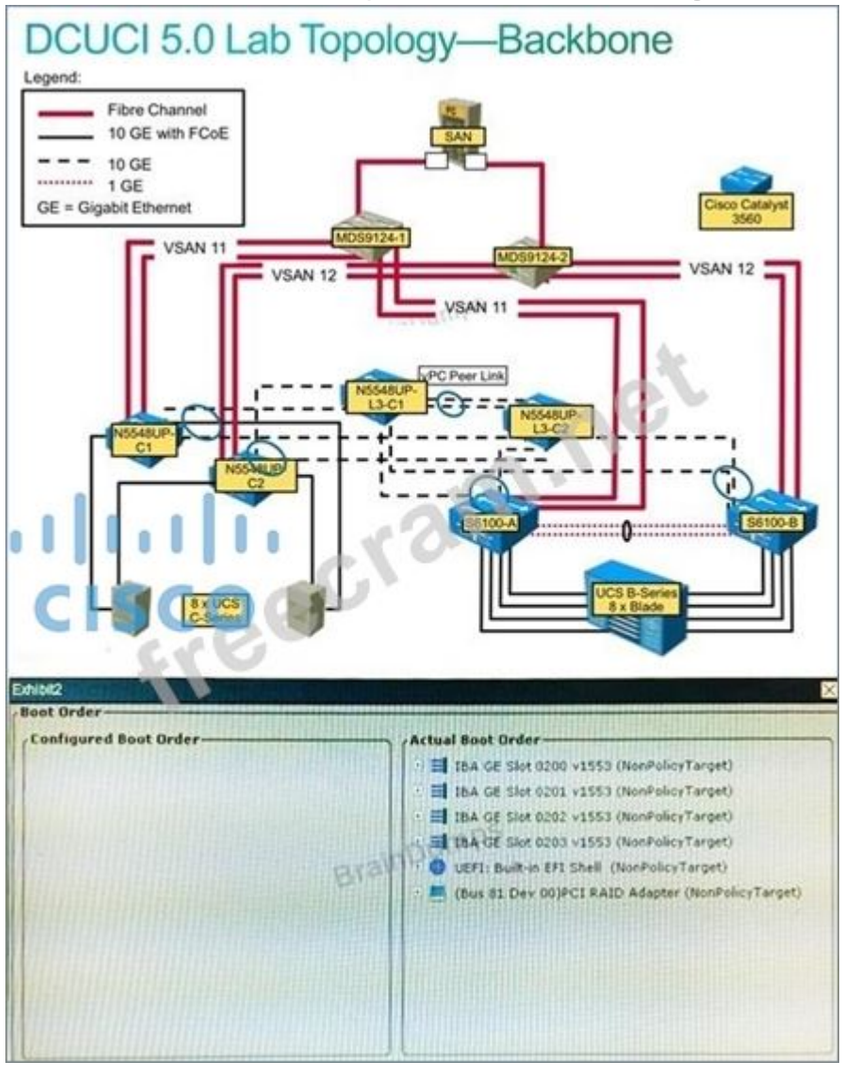



Exhibit5
cisco
User Details
User Properties
ID: 2
Enabled:
Username:
Role: read-only
Change Password:
New Password:
Confirm New Password:
Save Changes
Reset Values
Cancel

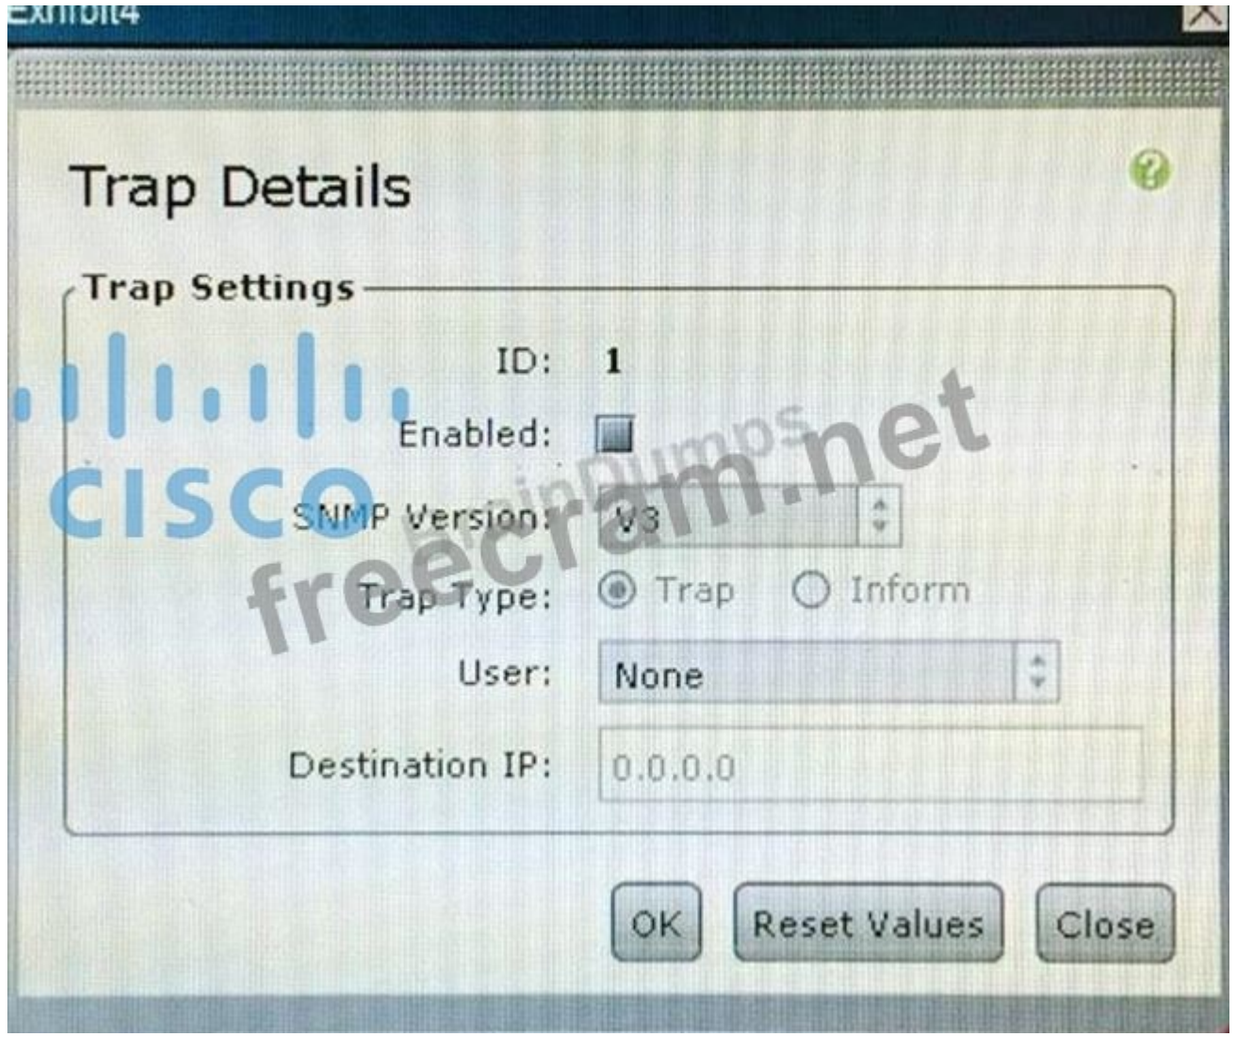

Refer to the screenshot in Exhibit 5. Which of the following user roles allows the permission Clear
All Logs?

A. read-only
B. user
C. operator
D. system

Answer: (SHOW ANSWER)

Reference:
http://www.cisco.com/c/en/us/td/docs/unified_computing/ucs/sw/gui/config/guide/20/b_UCSM_GUI_Configuration_Guide_2_0/b_UCSM_GUI_Configuration_Guide_2_0_chapter_01001.html

NEW QUESTION: 198

Which port type mode must be used on a Cisco UCS Manager for a SPAN port?

A. eth-traffic-mon
B. eth-uplink
C. eth-storage

D. eth-server
Answer: (SHOW ANSWER)

NEW QUESTION: 199
Which statement about high-availability clusters for Cisco UCS Fabric Interconnects is true?
A. Peers in a cluster must connect to each other by using two 10-Gbps links.
B. The cluster requires a minimum of two IP addresses.
C. The management plane is active/standby.
D. The data plane is active/standby.
Answer: (SHOW ANSWER)
Reference:
http://www.cisco.com/c/en/us/td/docs/unified_computing/ucs/sw/gui/config/guide/20/b_UCSM_GUI_Configuration_Guide_2_0/b_UCSM_GUI_Configuration_Guide_2_0_chapter_0100.html

NEW QUESTION: 200
From the Cisco UCS Manager GUI, which two configurations can be performed for Cisco UCS C-Series Rack-Mount Servers from the rack server discovery policy? (Choose two.)
Freecram.net
A. whether the server is discovered immediately or after the acknowledgement of the administrator
B. defines the scrub policy to be used upon discovery
C. defines the management IP address to be associated to the server upon discovery
D. reverts a -Series server from Cisco UCS domain mode to standalone mode
E. defines the Cisco Host Upgrade Utility ISO file for the rack servers connected to the fabric interconnects
Answer: (SHOW ANSWER)
Reference:
http://www.cisco.com/c/en/us/td/docs/unified_computing/ucs/sw/gui/config/guide/20/b_UCSM_GUI_Configuration_Guide_2_0/b_UCSM_GUI_Configuration_Guide_2_0_chapter_0100.html

NEW QUESTION: 201
Scenario
In this scenario, you will refer to screenshots about Cisco UCS B-Series servers and UCS Manager.
Instructions
To access the multiple-choice questions, click on the numbered boxes on the left of the top panel.
There are four multiple-choice questions with this task.
Be sure to answer all four questions before selecting the Next button.

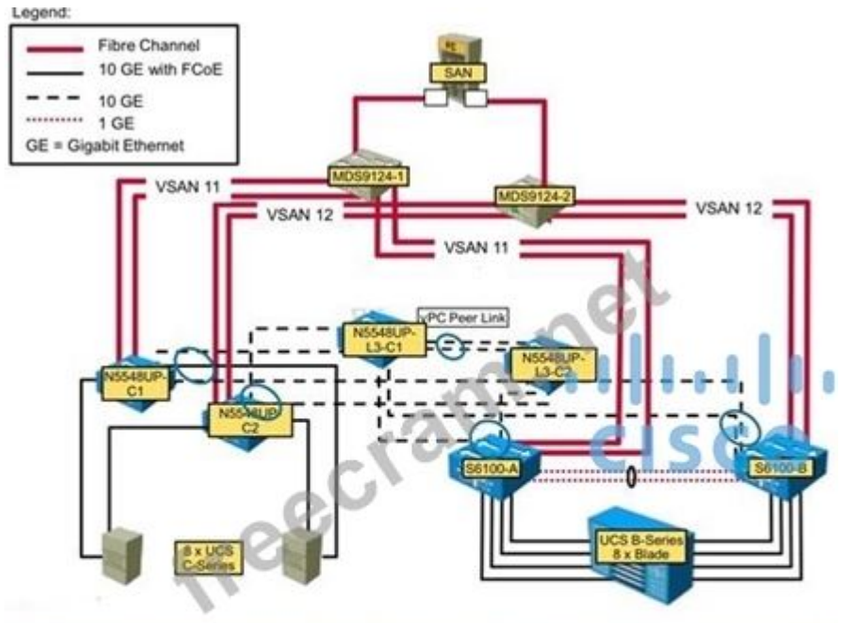


Exhibit2

```
interface Vethernet749
  description server 1/1, VNIC vNIC0
  switchport mode trunk
  untagged cos 4
  no pinning server sticky
  pinning server pinning-failure link-down
```

Exhibit3


Policies
root
Adapter Policies
BIOS Defaults
BIOS Policies
Boot Policies
Host Firmware Packages
IPMI Access Profiles
Local Disk Config Policies
Maintenance Policies
Management Firmware Packages
Memory Policy
Power Control Policies
Scrub Policies
Serial over LAN Policies
Server Pool Policies
Server Pool Policy Qualifications
Threshold Policies
iSCSI Authentication Profiles
vNIC/vHBA Placement Policies
Sub-Organizations



Refer to the Exhibit 3 screenshot of UCS Manager. Which two items are required to configure an IPMI profile? (Choose two.)

A. IPMI Type

B. User

C. Role

D. Locale

E. Administrative State

Answer: (SHOW ANSWER)

Reference:

http://www.cisco.com/c/en/us/td/docs/unified_computing/ucs/sw/gui/config/guide/20/b_UCSM_GUI_Configuration_Guide_2_0/b_UCSM_GUI_Configuration_Guide_2_0_chapter_011100.html#d129007e3491a1635

NEW QUESTION: 202

Which BIOS setting is required for a VMware ESXi 5.0 host to support Cisco VM-FEX universal pasthrough mode?

A. ACPI 10 Support

B. Processor C State

C. VEMDPA Agent

D. VT for Directed IO

E. Execute Disabled Bit

Answer: (SHOW ANSWER)

NEW QUESTION: 203
Before upgrading a Cisco UCS cluster. you need to verify the high-availability statue and roles of the cluster.
In which scenario can you successfully perform the upgrade'?
A. When you check the Cisco UCS Manager GUI, the Ready field value is Ready and the State field value is Active. When you check the Cisco UCS Manager CLI, the Primary and Secondary interconnect state are both READY and the cluster state is HA WAITING.
B. When you check the Cisco UCS Manager GUI, the Ready field value is Ready and the State field value is On. When you check the Cisco UCS Manager CLI, the Primary and Secondary interconnect state are both ON and the cluster state is HA WAITING.
C. When you check the Cisco UCS Manager GUI, the Ready field value is Ready and the State field value is Up. When you check the Cisco UCS Manager CLI, the Primary and Secondary interconnect state are both UP and the cluster state is HA UP.
D. When you check the Cisco UCS Manager GUI, the Ready field value is Yes and the State field value is Up. When you check the Cisco UCS Manager CLI, the Primary and Secondary interconnect state are both UP and the cluster state is HA READY.
Answer: (SHOW ANSWER)

NEW QUESTION: 204
Which two VMware features will not allow an adapter to transition from Cisco VM-FEX standard mode to universal passthrough mode? (Choose two.)
A. Volume Shadow Copy
B. Resource Reservations
C. VM Snapshot
D. Storage vMotion
E. HA
Answer: (SHOW ANSWER)


NEW QUESTION: 205
When using VM-FEX, the new VMs are not connected, but existing VMs are unaffected.
Which option describes the most likely cause?
A. Binding is set to ephemeral on the DVS, but it must be set to static.
B. Dynamic NICs have been exhausted.
C. The adapter has failed.
D. Hostd on the host has stopped responding to Cisco UCS Manager.
Answer: (SHOW ANSWER)


NEW QUESTION: 206
Which two statements are true concerning authorization when using RBAC in a Cisco Unified Computing System? (Choose two.)
A. When a user has both local and remote accounts, the roles defined in the remoteuser account override those in the local user account.
B. The logical resources, pools and policies, are grouped into roles.

C. A role contains a set of privileges which define the operations that a user is allowed to take.
D. Customized roles can be configured on and downloaded from remote AAA servers.
E. A locale without any organizations, allows unrestricted access to system resources in all organizations.
Answer: (SHOW ANSWER)


NEW QUESTION: 207
You plan to configure a Fibre Channel port channel on a Cisco UCS system.
What is the maximum number of port channels and ports per port channel on a Cisco UCS 6200 Series device?
A. eight Fibre Channel port channels and 24 Fibre Channel ports per port channel
B. eight Fibre Channel port channels and 16 Fibre Channel ports per port channel
C. four Fibre Channel port channels and 16 Fibre Channel ports per port channel
D. four Fibre Channel port channels and 24 Fibre Channel ports per port channel
Answer: (SHOW ANSWER)

NEW QUESTION: 208
HOTSPOT

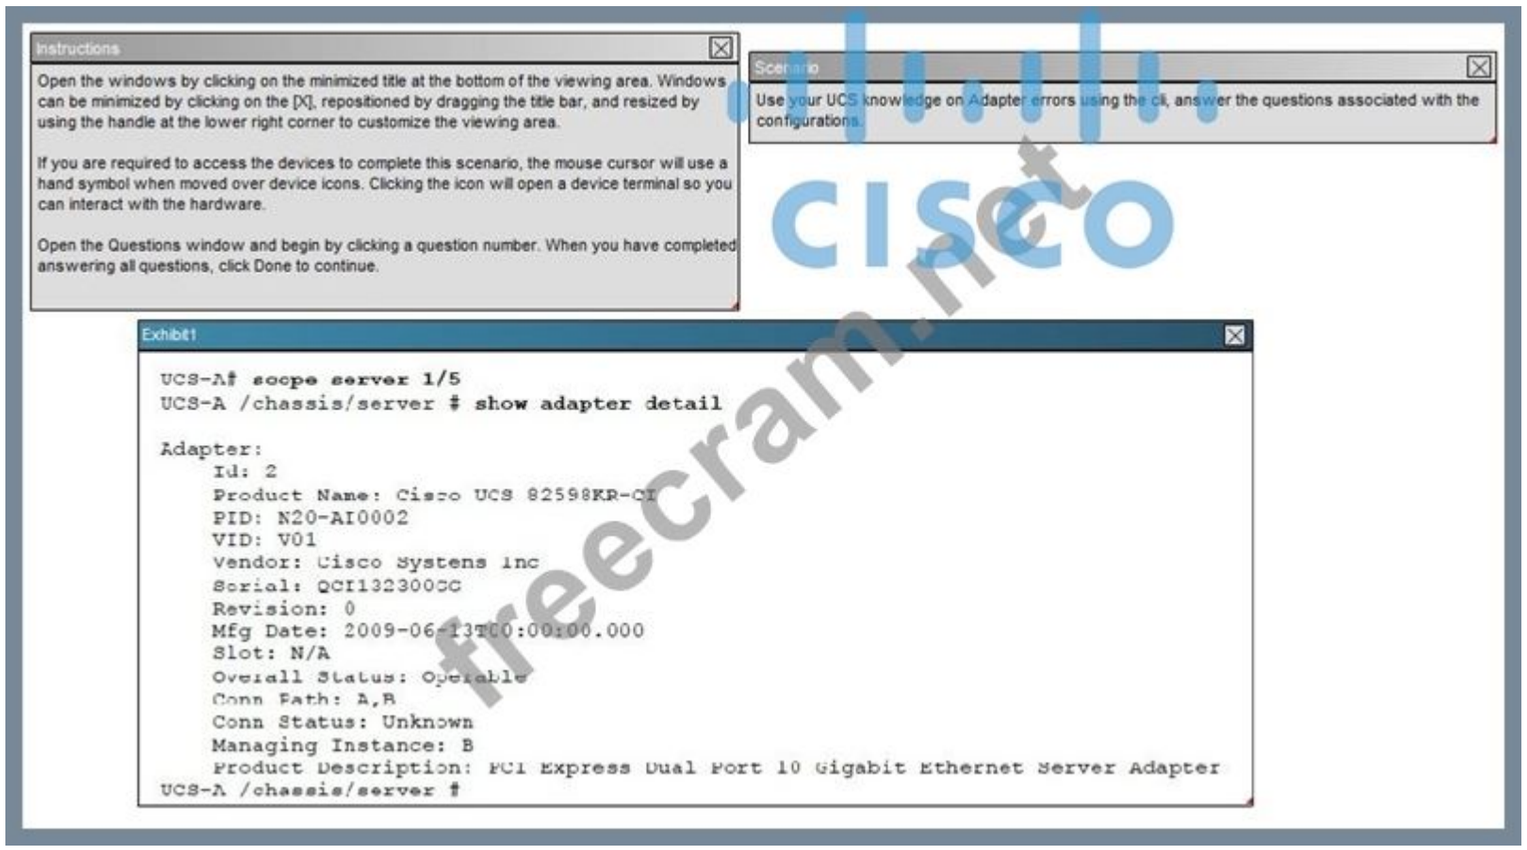

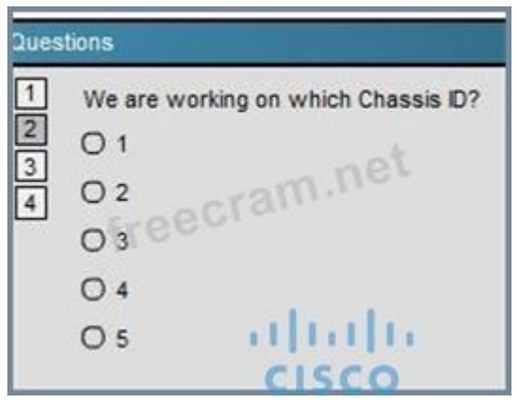

Answer:

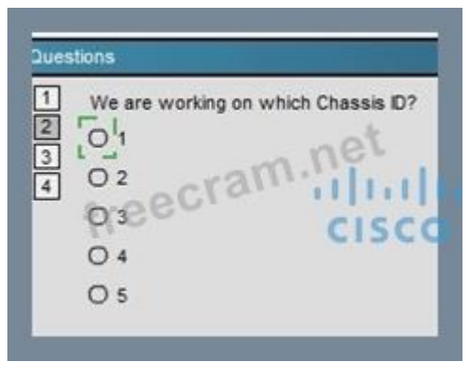

NEW QUESTION: 209

Which option describes the difference between "high-performance" and "none" on a VM-FEX port profile?

A. None indicates that VM-FEX is not used on this interface, and high-performance indicates that is used.

B. None assumes default scheduling settings for the port profile, and high-performance gives the ports priority in scheduling.

C. None is used for management profiles, and high-performance is used for mission-critical data profiles.

D. None is software assisted, and high-performance is software and hardware assisted.

Answer: (SHOW ANSWER)

NEW QUESTION: 210

In which situation would you be required to change a Cisco UCS system from end-host mode to switching mode?

FreeCram.net

A. Upstream Cisco Nexus 5000 is configured for vPC.

B. Fabric interconnect is connecting to disjoint Layer 2 networks upstream.

C. Design requirements call for the use of fabric failover.

D. HSRP routers are directly connected to the fabric interconnect.

Answer: (SHOW ANSWER)

NEW QUESTION: 211

Which of the following scenarios accurately demonstrate how the Cisco Unified Computing System ensures that a firmware upgrade is minimally disruptive to the data center unified fabric?


A. If an I/O module is upgraded to a version that is incompatible with its fabric interconnect, the fabric interconnect can automatically reactivate the I/O module to a compatible version.

B. If components like server BIOS, HBA, and RAID controller firmware are unsuccessfully updated through direct firmware updates, the update process will fall back to a host firmware package that is associated with the service profile.
C. If an update of the subordinate fabric interconnect leaves it in a nonusable state, the primary fabric interconnect will automatically be updated to ensure that one fabric interconnect is running the most recent firmware.
D. After Cisco Unified Computing System Manager upgrades the subordinate node, only then is the active management node automatically synchronized.
Answer: A (LEAVE A REPLY)


Valid 300-175 Dumps shared by EduDump.com for Helping Passing 300-175 Exam! EduDump.com now offer the **newest 300-175 exam dumps**, the EduDump.com 300-175 exam **questions have been updated** and **answers have been corrected** get the **newest** EduDump.com 300-175 dumps with Test Engine here: https://www.edudump.com/exams/Cisco/300-175/premium/ (**175** Q&As Dumps, **35%OFF Special Discount Code: freecram**)

NEW QUESTION: 212
Which destination(s) are valid for syslog messages for a Cisco UCS Fabric Interconnect?
A. the console, the monitor, and a file
B. the console and log only
C. the log, the monitor and syslog queue
D. a file
Answer: (SHOW ANSWER)

NEW QUESTION: 213
DRAG DROP

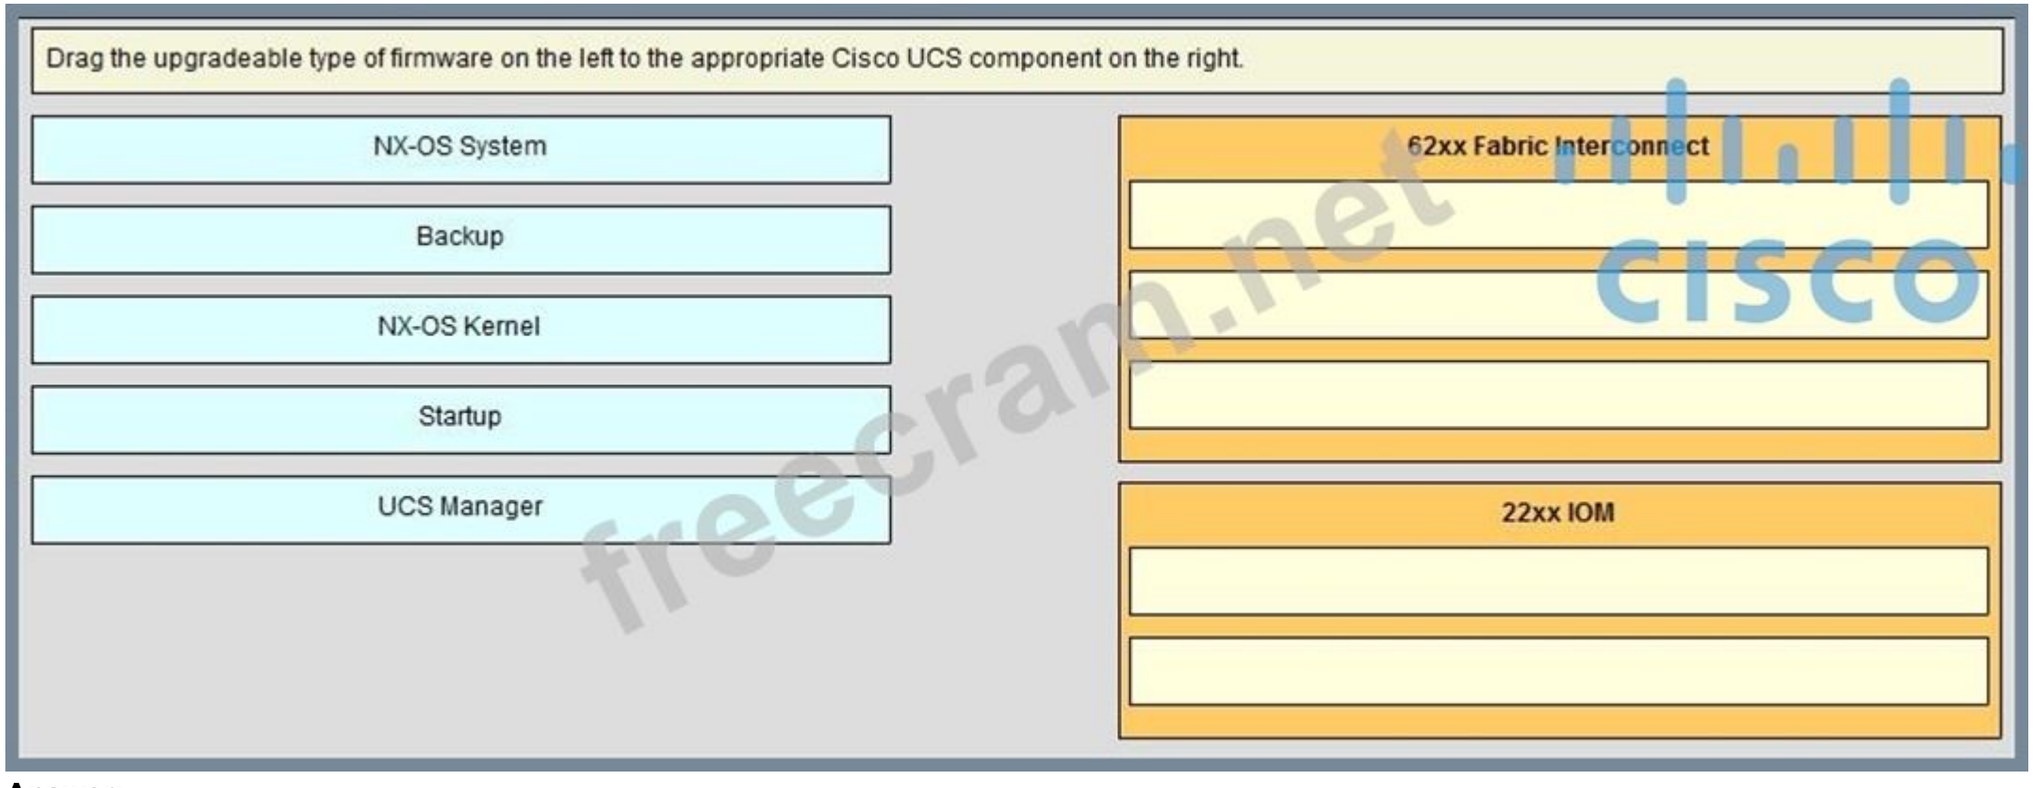

Answer:

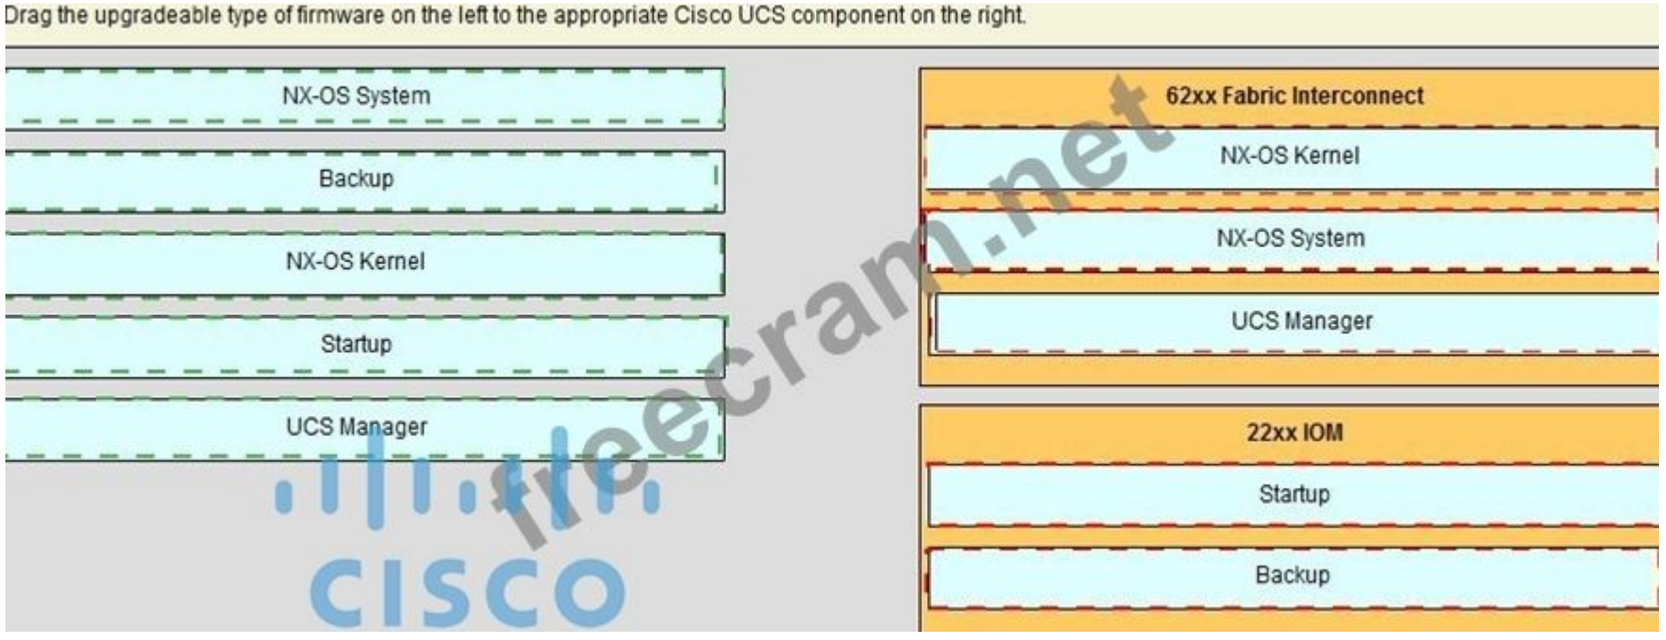

NEW QUESTION: 214
Which of the following is true with respect to recovery from failure with automatic pinning that is configured on a cluster of Cisco Unified Computing System 62XX Fabric Interconnects?
A. When a northbound fabric interconnect link goes down, the fabric interconnect will send a gratuitous ARP to the northbound switch to announce the servers on the new port.
B. When a northbound fabric interconnect link goes down, the affected servers will use NIC teaming to re-establish connectivity on the second fabric interconnect.
C. In the event that all uplink ports on the fabric interconnect lose connectivity, the 22XX I/O module shuts down all of the host ports until at least one uplink is restored.
D. By default, server MAC addresses are pinned to uplink interfaces using PIN groups.
Answer: (SHOW ANSWER)

NEW QUESTION: 215
Which feature must be configured for Linux VMs to be able to transition from Cisco VM-FEX standard mode to universal passthrough mode?
A. RSS
B. MSI Interrupt Mode
C. Execute Disabled Bit
D. Processor C State
E. VEMDPA Agent
Answer: (SHOW ANSWER)

NEW QUESTION: 216
Which UCS components firmware are contained in the UCS Infrastructure software bundle?
A. Cisco IMC
B. IO Module
C. UCS Fabric Interconnects

D. UCS BIOS
E. UCS Adapters
F. UCS Manager
Answer: B,C,F (LEAVE A REPLY)

NEW QUESTION: 217
You have a Cisco UCS B200 M2 server configured with 12 4-GB DDR3 1333-MHz dual- voltage memory DIMMs. You learned that the server memory speed is running at 1066
MHz instead. How can you configure the server to run at maximum memory speed?
A. Memory speed of the ESX host is configurable on VMware vCenter.
B. On the CIMC of the Cisco UCS B200 M2, select 1333 MHz in the Memory Speed option.
C. Create a BIOS policy. In the RAS Memory BIOS settings, select Performance Mode for
LV DDR Mode.
D. You cannot configure memory speed of 1333 MHz. The maximum memory speed of a
Cisco UCS B200 M2 server with 12 4-GB DIMM is 1066 MHz.
Answer: (SHOW ANSWER)

NEW QUESTION: 218
Where do you configure the VLAN when provisioning new VLANs in VM-FEX?
A. Cisco UCS Manager on the service profile
B. Cisco UCS Manager on the port profile
C. vCenter on the host
D. vCenter on the port group
Answer: (SHOW ANSWER)

NEW QUESTION: 219
Which three components are parts of the Cisco UCS -Series Blade Server software bundle?
(Choose three.)
A. the adapter firmware
B. the Kernel and system firmware for fabric interconnects
C. the BIOS firmware
D. the IOM firmware
E. the Cisco UCS Manager software
F. the board controller firmware
Answer: (SHOW ANSWER)
Reference: http://www.cisco.com/c/en/us/td/docs/unified_computing/ucs/sw/firmware- mgmt/gui/2-2/b_GUI_Firmware_Management_22/b_GUI_Firmware_Management_22_chapter_0100.ht ml

NEW QUESTION: 220
Which ports can access the Cisco IMC if you select Shared LOM NIC mode in the Cisco IMC Configuration Utility for a Cisco UCS C-Series server?

Pass4sure.com

A. the two 1-Gb Ethernet ports
B. the two 10/100 management ports, but each port has a default setting
C. the ports on an installed Cisco network adapter card
D. the two 10/100 management ports
Answer: (SHOW ANSWER)

NEW QUESTION: 221
Which set of statements about the deployment options for Cisco UCS Central Software is true?
A. Cisco UCS Central Software can be installed in a physical or a hypervisor environment.
Only VMware and KVM hypervisor environments are supported.
B. Cisco UCS Central Software can he installed in a physical or a hypervisor environment.
VMware, Microsoft Hyper-V, and KVM hypervisor environments are supported.
C. Cisco UCS Central Software can be installed only in a physical environment, due to extreme I/O and networking needs.
D. Cisco UCS Central Software can be installed only in a VMware and Microsoft Hyper-V virtual environment.
Answer: (SHOW ANSWER)

NEW QUESTION: 222
Which three options are true regarding port profiles in Cisco UCS Manager? (Choose three.)
A. Port profiles are represented as a port group in vCenter.
B. Port profile parameters are visible on vCenter.
C. Port profile parameters can be modified from vCenter.
D. Port profiles define operating-system kernel parameters.
E. Port profiles can be used by more than one DVS.
F. Port profiles can be modified only from Cisco UCS Manager.
Answer: (SHOW ANSWER)

NEW QUESTION: 223
You need to design and implement a Cisco UCS 5108 Blade Server Chassis system for a customer.
Which statement about how half-width blades and full-width blades can be used is true?
A. Half-width blade types and full-width blade types cannot be combined.
B. Only two full-width blades can be installed in the top two slots, and four half-width blades can be installed in the bottom two slots.
C. Only one full-width blade can be installed in the top slot, and six half-width blades can be installed in the bottom slots.
D. Half-width blades and full-width blades can be combined in any order.
Answer: (SHOW ANSWER)

NEW QUESTION: 224
Which three options are valid system classes for QoS in a Cisco UCS blade system?
(Choose three.)
A. drop eligible
B. FCoE
C. voice

D. best effort
E. high-priority
F. platinum
G. silver
Answer: (SHOW ANSWER)

NEW QUESTION: 225
Which adapter is capable of supporting VM-FEX?
A. VIC 1280
B. Cisco UCS M72KR
C. Cisco UCS M61KR-I
D. Cisco UCS M51KR-B
Answer: (SHOW ANSWER)

NEW QUESTION: 226
Which two items can you provision in a vHBA Template? (Choose two.)
A. FLOGI Timeout
B. vHBA Interrupt Mode
C. SCSI I/O Queues
D. FCoE VLAN
E. Max Data Field Size
F. Stats Threshold Policy
Answer: E,F (LEAVE A REPLY)

Valid 300-175 Dumps shared by EduDump.com for Helping Passing 300-175 Exam! EduDump.com now offer the **newest 300-175 exam dumps**, the EduDump.com 300-175 exam **questions have been updated** and **answers have been corrected** get the **newest** EduDump.com 300-175 dumps with Test Engine here:
https://www.edudump.com/exams/Cisco/300-175/premium/ (**175** Q&As Dumps, **35%OFF** **Special Discount Code:** **freecram**)

NEW QUESTION: 227
If there are four I/O module links from the Cisco Unified Computing System 5108 Blade
Chassis to the Cisco Unified Computing System 6248UP Fabric Interconnect, which dynamic vNICs can be defined?
A. 16
B. 24
C. 112
D. 48
E. 9
F. 54
Answer: (SHOW ANSWER)

NEW QUESTION: 228
When cabling a Cisco UCS 6200 Series Fabric Interconnect to disjoint Layer 2 networks, which option must be considered?
A. Each vNIC can communicate to a single disjoint network.
B. You must first configure a LAN pin group.
C. The fabric interconnect must be in switching mode.
D. Each VLAN is allowed across multiple disjoint uplinks.
Answer: (SHOW ANSWER)

NEW QUESTION: 229
Which three tasks can a user with the ext-lan-policy privileges perform? (Choose three.)
A. Configure Ethernet pin groups.
B. Configure management interfaces monitoring policy.
C. Specify the allowed range for virtual MAC addresses.
D. Configure DNS providers and DNS domain.
E. Configure fabric interconnect system name.
F. Configure management interfaces on the fabric interconnect.
G. This privilege has full access to all operations.
H. Create/modify/delete vNIC/vHBA placement policies.
Answer: (SHOW ANSWER)

NEW QUESTION: 230
In the Create Dynamic vNIC Connection Policy dialog box, there is a configurable field titled Protection.
What is the significance of the three choices for Protection?
Freecram.net
A. selects the primary fabric association for dynamic vNICs
B. enables static binding of the VM port profile to dynamic vNICs
C. enables hardware-based failover
D. allows dynamic vNICs to be reserved for fabric failover
E. allows reserve vNICs to be allocated out of the spares pool
Answer: (SHOW ANSWER)

NEW QUESTION: 231
The Cisco UCS administrator has the chassis discovery policy set to "2-link". The administrator connects a new chassis to the Cisco UCS 6200 Series Fabric Interconnects using four links. Which option about link utilization is true?
A. The Cisco UCS will use only two links. The other two links are unusable.
B. The Cisco UCS will use all four links for discovery.
C. The Cisco UCS will use two links until the chassis is reacknowledged, after which it will use all four links.
D. The Cisco UCS will use only two links. However, the administrator can manually pin traffic to the extra links by using service profiles.
Answer: C (LEAVE A REPLY)

NEW QUESTION: 232
Which two descriptions of the Call Home feature on a Cisco UCS server are true? (Choose two.)

A. uses Java to generate predefined reports
B. provides an email-based notification for critical system policies
C. provides all the information to administrators, who can open a case with one click
D. delivers alerts to multiple recipients, including Cisco TAC, and generates a case by using Cisco TAC
E. provides a central repository for storing fault data
Answer: (SHOW ANSWER)
Reference:
http://www.cisco.com/c/en/us/td/docs/unified_computing/ucs/sw/gui/config/guide/1-31/b_UCSM_GUI_Configuration_Guide_1_3_1/UCSM_GUI_Configuration_Guide_1_3_1_ chapter39.html

NEW QUESTION: 233
Which four Cisco UCS components use the Cisco NX-OS syslog services to generate syslog entries for system information and alerts? (Choose four.)
A. I/O module
B. fabric interconnect
C. adapter
D. Cisco UCS Manager
E. Cisco Integrated Management Controller
F. chassis
G. storage module
H. Ethernet uplink
Answer: (SHOW ANSWER)

NEW QUESTION: 234
Which two tasks enable jumbo frames on a Cisco UCS system? (Choose two.)
A. In the service profile, configure MTU 9000 in the uplink interfaces.
B. In the LAN cloud on Cisco UCS Manager, configure MTU 9000 in the uplink interfaces.
C.
D. In the LAN cloud on Cisco UCS Manager, configure MTU 9000 in the VLAN.
E. In the LAN cloud on Cisco UCS Manager, define a QoS system class with MTU 9000.
F. In the LAN cloud on Cisco UCS Manager, enable jumbo frames in Fabric A and Fabric
G. In the service profile, configure MTU 9000 in the vNIC.
H. In the service profile, configure MTU 9000 in the virtual machine.
Answer: (SHOW ANSWER)

NEW QUESTION: 235
When configuring roles in the Cisco UCS C-Series, which role should be assigned for a person who must be allowed to power on the server and install a hypervisor using virtual media, but not allowed to configure other Cisco Integrated Management Controller settings?
A. read-only
B. admin

C. user
D. VM admin
Answer: C (LEAVE A REPLY)

Valid 300-175 Dumps shared by EduDump.com for Helping Passing 300-175 Exam! EduDump.com now offer the **newest 300-175 exam dumps**, the EduDump.com 300-175 exam **questions have been updated** and **answers have been corrected** get the **newest** EduDump.com 300-175 dumps with Test Engine here:
https://www.edudump.com/exams/Cisco/300-175/premium/ (**175** Q&As Dumps, **35%OFF Special Discount Code: freecram**)