

Cisco.300-175.v2018-05-16.q80

Exam Code:	300-175
Exam Name:	Implementing Cisco Data Center Unified Computing
Certification Provider:	Cisco
Free Question Number:	80
Version:	v2018-05-16
# of views:	1046
# of Questions views:	29097
https://www.freecram.net/torrent/Cisco.300-175.v2018-05-16.q80.html	

NEW QUESTION: 1

Which of the following is the most accurate concerning the link configuration between Cisco Unified Computing System 22XX I/O modules and Cisco Unified Computing System 62XX Fabric Interconnects?

- A. Port channels are always recommended when using source-dest-mac load balancing.
- B. The addition of links to a port channel requires a reacknowledgement.
- C. You cannot mix and match discrete links and port channeling for different chassis when using 22XX.
- D. Port channels do not require a Global Chassis Discovery policy.

Answer: (SHOW ANSWER)

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 2

Which two are true with respect to the switching modes on the Cisco Unified Computing System 62XX Fabric Interconnect? (Choose two.)

- A. End-host mode presents a link to a northbound uplink switch as a host trunk with loop detection that is provided by STP.
- B. For northbound traffic, server MAC addresses are statically pinned to an uplink; the return path is controlled by the unified fabric switches.
- C. A fabric interconnect port in Ethernet switching mode appears to the uplink switch as a host with many MAC addresses.
- D. Server-to-server traffic on a common VLAN are locally switched by the fabric interconnect and not the northbound switches.
- E. A MAC forwarding table is not used to forward traffic to the uplink switch.

F. A MAC address forwarding table is maintained for server-to-server communications across VLANs.

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 3

Which backup option must be used for a system restore?

- A. full state
- B. all configuration
- C. system configuration
- D. logical configuration
- E. incremental

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 4

Drag the characteristic on the left to the appropriate Cisco UCS adapter on the right, where the adapter supports that characteristic.

Supports iSCSI boot	M51K
Supports 4G Fibre Channel	
Supports native OS FCoE	M61K
	M72K

freecram.net
Actual Tests
CISCO

Select and Place:

Drag the characteristic on the left to the appropriate Cisco UCS adapter on the right, where the adapter supports that characteristic

Supports iSCSI boot	M51K
Supports 4G Fibre Channel	
Supports native OS FCoE	M61K
	M72K

Answer:

Drag the characteristic on the left to the appropriate Cisco UCS adapter on the right, where the adapter supports that characteristic

	M51K
	Supports
	M61K
	Supports na
	M72K
	Supports 4G

Section: Drag & Drop

NEW QUESTION: 5

Which of the following is not a feature of the Cisco Unified Computing System VIC-1280 adaptor?

- A. capable of up to 256 virtual interfaces
- B. supports FCoE
- C. supports Cisco VM-FEX
- D. compatible with the C- or B-Series Cisco Unified Computing System servers

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 6

Which three items are supported operating systems of the Cisco VM-FEX universal passthrough?
(Choose three.)

- A. Oracle Solaris 11
- B. Red Hat Enterprise Linux 6.0
- C. Microsoft Windows Server 2003 SP3
- D. Microsoft Windows Server 2008
- E. Ubuntu Server 12.2
- F. SLES 11

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 7

How many links are there between a second-generation IOM (Cisco UCS 2204 or 2208) and a third-generation half-width blade (Cisco UCS B200 M3 or B22 M3) in a Cisco UCS system?

- A. 1
- B. 2
- C. 4
- D. 8

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 8

What is a true statement concerning automatic Fibre Channel pinning on a Cisco Unified Computing System 62XX Fabric Interconnect?

- A. By default, uplink Fibre Channel interfaces are configured for VSAN trunking.
- B. Using NPV, each downstream server will be pinned to an uplink port that is based on a PIN group.
- C. The Fibre Channel pinning process is implemented differently than end-host MAC address pinning.
- D. With VSAN trunking, the automatic pinning of server traffic to Fibre Channel uplink ports will be based on the server WWN.

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 9

Instructions

Open the windows by clicking on the minimized title at the bottom of the viewing area. Windows can be minimized by clicking on the [X], repositioned by dragging the title bar, and resized by using the handle at the lower right corner to customize the viewing area.

If you are required to access the devices to complete this scenario, the mouse cursor will use a hand symbol when moved over device icons. Clicking the icon will open a device terminal so you can interact with the hardware.

Open the Questions window and begin by clicking a question number. When you have completed answering all questions, click Done to continue.

Scenario

Use your UCS knowledge on Adapter errors u configurations.

Exhibit1

```
UCS-A# scope server 1/5
UCS-A /chassis/server # show adapter detail

Adapter:
  Id: 2
  Product Name: Cisco UCS 82598KR-CI
  PID: N20-AI0002
  VID: V01
  Vendor: Cisco Systems Inc
  Serial: QCI132300CG
  Revision: 0
  Mfg Date: 2009-06-13T00:00:00.000
  Slot: N/A
  Overall Status: Operable
  Conn Path: A,B
  Conn Status: Unknown
  Managing Instance: B
  Product Description: PCI Express Dual Port 10 Gigabit Ethernet Serv
UCS-A /chassis/server #
```

We are working on which Chassis ID?

- A. 1
- B. 2
- C. 3
- D. 4
- E. 5

Answer: ([SHOW ANSWER](#))

Section: Hot Spot

Explanation/Reference:

Questions

1

We are working on which Chassis ID?

2

☒ 1

3

☐ 2

4

☐ 3

☐ 4

☐ 5

Explanation: 1

NEW QUESTION: 10

Which of the following scenarios accurately demonstrate how the Cisco Unified Computing System ensures that a firmware upgrade is minimally disruptive to the data center unified fabric?

- A.** If an I/O module is upgraded to a version that is incompatible with its fabric interconnect, the fabric interconnect can automatically reactivate the I/O module to a compatible version.
- B.** If components like server BIOS, HBA, and RAID controller firmware are unsuccessfully updated through direct firmware updates, the update process will fall back to a host firmware package that is associated with the service profile.
- C.** If an update of the subordinate fabric interconnect leaves it in a nonusable state, the primary fabric interconnect will automatically be updated to ensure that one fabric interconnect is running the most recent firmware.
- D.** After Cisco Unified Computing System Manager upgrades the subordinate node, only then is the active management node automatically synchronized.

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 11

Your systems engineer has determined all of the firmware versions that the server operating system supports. What steps are taken on Cisco UCS to avoid manual firmware upgrades on the blade servers?

- A.** Use Cisco UCS Manager firmware management to upgrade all Cisco UCS blade servers to the same target firmware versions.
- B.** Configure host firmware package and management firmware package policies and associate the firmware policies with the service profiles.
- C.** Create a BIOS policy and define the host firmware package and management firmware package.
- D.** Configure host firmware package and management firmware package policies and associate the firmware policies with the server pools.

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 12

Which ports can access the Cisco IMC if you select Shared LOM NIC mode in the Cisco IMC Configuration Utility for a Cisco UCS C-Series server?

- A.** the ports on an installed Cisco network adapter card
- B.** the two 1-Gb Ethernet ports

- C. the two 10/100 management ports
- D. the two 10/100 management ports, but each port has a default setting

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 13

When you create a vHBA, what will you achieve by enabling persistent binding?

- A. This feature allows the binding of the SCSI targets to the vHBA, even across reboots.
- B. This feature allows the binding of the same WWPN from the pool to the vHBA, even across reboots.
- C. This feature allows the binding of the same WWNN from the pool to the vHBA, even across reboots.
- D. This feature allows the binding of the Fibre Channel uplink to the vHBA, even across reboots.

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 14

What is the purpose of the maximum ports that are filed in the port profile?

- A. determines the maximum number of uplinks that VMs can use
- B. determines the maximum number of VMs that can use the DVS
- C. determines the maximum number of DVSs that can use the port profile
- D. determines the maximum number of dynamic vNICS on the DVS

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 15

Instructions

Open the windows by clicking on the minimized title at the bottom of the viewing area. Windows can be minimized by clicking on the [-], repositioned by dragging the title bar, and resized by using the handle at the lower right corner to customize the viewing area.

If you are required to access the devices to complete this scenario, the mouse cursor will use a hand symbol when moved over device icons. Click the icon to open a device terminal to interact with the hardware.

Open the **Questions** window and begin by clicking a question number. When you have completed answering all questions, click **Done** to continue.

Scenario

Use your UCS knowledge on Fabric Interconnect Fa UCS cluster.

Exhibit1

```

UCS-A# show cluster state
Cluster Id: 0xfc436fa8b88511e0-0xa370000573cb6c04

A: UP, PRIMARY
B: UP, SUBORDINATE

HA READY
UCS-A# connect local-mgmt
Cisco Nexus Operating System (NX-OS) Software
TAC support: http://www.cisco.com/tac
Copyright (c) 2002-2011, Cisco Systems, Inc. All rights reserved.
The copyrights to certain works contained in this software are
owned by other third parties and used and distributed under
license. Certain components of this software are licensed under
the GNU General Public License (GPL) version 2.0 or the GNU
Lesser General Public License (LGPL) Version 2.1. A copy of each
such license is available at
http://www.opensource.org/licenses/gpl-2.0.php and
http://www.opensource.org/licenses/lgpl-2.1.php

UCS-A(local-mgmt)# cluster lead b
UCS-A(local-mgmt)#

```

Which statements is true regarding the Fabric Interconnect Failover configuration changes?

- A. high availability is being setup so that cluster a and b can both be subordinate or primary.
- B. The fabric interconnect b changes from subordinate to primary.
- C. High availability is setup so that fabric interconnect will keep a to be primary and b will be lead.
- D. The Fabric interconnect can have two lead states, so that b will switch to primary and a will stay primary.

Answer: (SHOW ANSWER)

Section: Hot Spot

Explanation/Reference:

1
2
3

Which statements is true regarding the Fabric Interconnect Failover configuration changes?

☐ High availability is being setup so that cluster a and b can both be subordinate or primary.

☒ The fabric interconnect b changes from subordinate to primary.

☐ High availability is setup so that fabric interconnect will keep a to be primary and b will be lead.

☐ The Fabric interconnect can have two lead states, so that b will switch to primary and a will stay primary.

Explanation: The fabric interconnect b changes from subordinate to primary

NEW QUESTION: 16

Which protocol is not supported for Cisco UCS backups and imports?

- A. FTP
- B. TFTP

- C. SCP
- D. SFTP
- E. HTTP

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

Valid 300-175 Dumps shared by ExamDiscuss.com for Helping Passing 300-175 Exam! ExamDiscuss.com now offer the **newest 300-175 exam dumps**, the ExamDiscuss.com 300-175 exam **questions have been updated** and **answers have been corrected** get the **newest** ExamDiscuss.com 300-175 dumps with Test Engine here:

<https://www.examdisscuss.com/Cisco/exam/300-175/premium/> (175 Q&As Dumps, **35%OFF**

Special Discount Code: **freecram**)

NEW QUESTION: 17

Which two are true with respect to the unified ports on the Cisco Unified Computing System 62XX Fabric Interconnect? (Choose two.)

- A.** The port mode is automatically discovered after plugging in a LAN or Fibre Channel-attached cable.
- B.** By default, unified ports that are changed to Ethernet port mode are set to uplink Ethernet port type.
- C.** Ethernet ports must be grouped together in a block and must start with the first port and end with an odd numbered port.
- D.** Alternating Ethernet and Fibre Channel ports is supported on the expansion module.
- E.** After making port mode changes on an expansion module, the module will reboot.
- F.** In a standalone configuration, making port mode changes to the fixed module will not cause the fabric interconnect to reboot.

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 18

Which UCS components firmware are contained in the UCS Infrastructure software bundle?

- A.** UCS BIOS
- B.** UCS Fabric Interconnects
- C.** UCS Adapters
- D.** UCS Manager

E. IO Module

F. Cisco IMC

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 19

Which feature must be configured for Linux VMs to be able to transition from Cisco VM-FEX standard mode to universal passthrough mode?

A. RSS

B. MSI Interrupt Mode

C. VEMDPA Agent

D. Execute Disabled Bit

E. Processor C State

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 20

What are the three main components of the VM-FEX environment? (Choose three.)

A. Red Hat Network Satellite server

B. ESX host with Cisco UCS M81KR VIC

C. ESX host with Cisco UCS M72KR CAN

D. VMware vCenter

E. VMware Update Manager

F. Cisco UCS Manager

G. Cisco VSG

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 21

Instructions

Open the windows by clicking on the minimized title at the bottom of the viewing area. Windows can be minimized by clicking on the [X], repositioned by dragging the title bar, and resized by using the handle at the lower right corner to customize the viewing area.

If you are required to access the devices to complete this scenario, the mouse cursor will use a hand symbol when moved over device icons. Clicking the icon will open a device terminal so you can interact with the hardware.

Open the Questions window and begin by clicking a question number. When you have completed answering all questions, click Done to continue.

Scenario

Use your UCS knowledge on Adapter errors u configurations.

Exhibit1

```
UCS-A# scope server 1/5
UCS-A /chassis/server # show adapter detail

Adapter:
  Id: 2
  Product Name: Cisco UCS 82598KR-CI
  PID: N20-AI0002
  VID: V01
  Vendor: Cisco Systems Inc
  Serial: QCI132300CG
  Revision: 0
  Mfg Date: 2009-06-13T00:00:00.000
  Slot: N/A
  Overall Status: Operable
  Conn Path: A,B
  Conn Status: Unknown
  Managing Instance: B
  Product Description: PCI Express Dual Port 10 Gigabit Ethernet Serv
UCS-A /chassis/server #
```

We are working on which server?

- A. 1
- B. 2
- C. 3
- D. 4
- E. 5

Answer: (SHOW ANSWER)

Section: Hot Spot

Explanation/Reference:

Questions

1

We are working on which server?

2

☐ 1

3

☐ 2

4

☐ 3

☐ 4

☒ 5

Explanation: 5

NEW QUESTION: 22

Which of the following are true concerning authentication within a Cisco Unified Computing System?

- A. Authentication domains are used to leverage individual authentication systems.
- B. You can create up to 64 authentication domains, each associated with a provider group and realm in Cisco Unified Computing System Manager.
- C. At login, the user can select the authentication domain to be used.
- D. Cisco Unified Computing System supports LDAP or RADIUS for remote authentication.
- E. A locally authenticated user account is authenticated directly through the fabric interconnect.

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 23

Which BIOS setting is required for a VMware ESXi 5.0 host to support Cisco VM-FEX universal passthrough mode?

- A. VT for Directed IO
- B. ACPI 10 Support
- C. VEMDPA Agent
- D. Execute Disabled Bit
- E. Processor C State

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 24

Drag the upgradeable type of firmware on the left to the appropriate Cisco UCS component on the right.

NX-OS System	62xx Fabric
Backup	
NX-OS Kernel	
Startup	
UCS Manager	22x

Select and Place:

Drag the upgradeable type of firmware on the left to the appropriate Cisco UCS component on the right.

Upgradeable Type of Firmware	Cisco UCS Component
NX-OS System	62xx Fabric Interconnect
Backup	62xx Fabric Interconnect
NX-OS Kernel	62xx Fabric Interconnect
Startup	62xx Fabric Interconnect
UCS Manager	22xx Fabric Interconnect

Answer:

Drag the upgradeable type of firmware on the left to the appropriate Cisco UCS component on the right.

Upgradeable Type of Firmware	Cisco UCS Component
	62xx Fabric Interconnect
	NX-OS System
	NX-OS Kernel
	UCS Manager
	22xx Fabric Interconnect

Section: Drag & Drop

NEW QUESTION: 25

This question concerns the replacement of a copper twinax SFP+ transceiver with an optical SFP+ transceiver on a Cisco Unified

Drag the options on the left to the right side in the correct order when performing the replacement. Note: Not all of the options on

Insert the optical SFP+ transceiver into the I/O module port	
Remove the Cisco Unified Computing System 21xx I/O module from the chassis	
Remove the SFP+ cable, leaving the I/O module port empty	
Pull gently on the rubber loop of the copper twinax SFP+ from the I/O module port	
Plug the fiber-optic cable into the optical SFP+ transceiver	

Select and Place:

This question concerns the replacement of a copper twinax SFP+ transceiver with an optical SFP+ transceiver on a Cisco Unified

Drag the options on the left to the right side in the correct order when performing the replacement. Note: Not all of the options on

Insert the optical SFP+ transceiver into the I/O module port	
Remove the Cisco Unified Computing System 21xx I/O module from the chassis	
Remove the SFP+ cable, leaving the I/O module port empty	
Pull gently on the rubber loop of the copper twinax SFP+ from the I/O module port	
Plug the fiber-optic cable into the optical SFP+ transceiver	

Answer:

This question concerns the replacement of a copper twinax SFP+ transceiver with an optical SFP+ transceiver on a Cisco Unified Computing System 21xx I/O module from the chassis.

Drag the options on the left to the right side in the correct order when performing the replacement. Note: Not all of the options on the left are used.

Remove the Cisco Unified Computing System 21xx I/O module from the chassis

Remove the SFP+ cable, leaving the I/O module port empty

Pull gently on the rubber loop of the module

Insert the optical SFP+ transceiver

Plug the fiber-optic cable into the module



Section: Drag & Drop

NEW QUESTION: 26

How does a dynamic vNIC get allocated?

- A. Dynamic vNICs are assigned to VMs in VMware vCenter.
- B. Dynamic vNICs can only be bound to the service profile through an updating template.
- C. Dynamic vNICs are bound directly to a service profile.
- D. Dynamic vNICs are assigned by binding a port profile to the service profile.

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 27

When upgrading a standalone Cisco UCS C-Series server, which method is correct?

- A. direct upgrade on all components
- B. Cisco Hardware Upgrade Utility
- C. Cisco Host Upgrade Utility
- D. Cisco Server Upgrade Utility

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 28

You have a Cisco UCS B200 M2 server configured with 12 4-GB DDR3 1333-MHz dual-voltage memory DIMMs. You learned that the server memory speed is running at 1066 MHz instead. How can you configure the server to run at maximum memory speed?

- A. You cannot configure memory speed of 1333 MHz. The maximum memory speed of a Cisco UCS B200 M2 server with 12 4-GB DIMM is 1066 MHz.
- B. Memory speed of the ESX host is configurable on VMware vCenter.
- C. Create a BIOS policy. In the RAS Memory BIOS settings, select Performance Mode for LV DDR Mode.
- D. On the CIMC of the Cisco UCS B200 M2, select 1333 MHz in the Memory Speed option.

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 29

Which two VMware features must be turned off in the data center cluster for Cisco VM-FEX universal passthrough to operate? (Choose two.)

- A. VMCI
- B. DRS
- C. FT
- D. HA
- E. vMotion

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 30

Which options are valid port types when configuring fixed 10-Gb LAN interfaces on the Cisco UCS 6200 Series Fabric Interconnects? (Choose three.)

- A. monitoring port
- B. server port
- C. uplink Ethernet port
- D. FEX port
- E. Fibre Channel storage port

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 31

Which two options are valid modes for VM-FEX in a Cisco UCS Manager port profile? (Choose two.)

- A. transparent
- B. bypass
- C. standard
- D. advanced
- E. high-performance
- F. low-pass

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

Valid 300-175 Dumps shared by ExamDiscuss.com for Helping Passing 300-175 Exam! ExamDiscuss.com now offer the **newest 300-175 exam dumps**, the ExamDiscuss.com 300-175 exam **questions have been updated** and **answers have been corrected** get the **newest** ExamDiscuss.com 300-175 dumps with Test Engine here:

<https://www.examdiscuss.com/Cisco/exam/300-175/premium/> (175 Q&As Dumps, **35%OFF**

Special Discount Code: **freecram**)

NEW QUESTION: 32

Which adapter is capable of supporting VM-FEX?

- A. VIC 1280
- B. Cisco UCS M61KR-I
- C. Cisco UCS M72KR
- D. Cisco UCS M51KR-B

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 33

How many certificates does Cisco Unified Computing System Manager have to export to communicate with VMware vCenter server if the VMware ESXi hosts are all running version 5.0 or higher?

- A. 1
- B. 2
- C. 4
- D. 8

E. 16

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 34

Which option describes the possible result of a customer configuring a server pool that contains Cisco UCS B200 M2 and B250 M2 blades?

- A.** A service profile cannot migrate automatically from one blade to another blade within the server pool due to hardware failure.
- B.** You must decommission a blade server for the associated service profile to migrate to another blade in the server pool successfully.
- C.** You must uncheck the Restrict Migration box in the service profile to allow service profile migration between blades in the server pool.
- D.** After service profile migration, the server fails in boot from SAN due to differences in PCI device IDs.

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 35

Which of the following is true concerning Fibre Channel communications on a Cisco Unified Computing System?

- A.** Each VSAN requires a dedicated VLAN to carry FCoE traffic.
- B.** FCoE VLANs are created like Ethernet VLANs on Cisco Unified Computing System Manager.
- C.** FCoE VLANs may overlap with Ethernet VLANs.
- D.** Cisco Unified Computing System Manager supports a maximum of 128 active VSANs.

Answer: **A** ([LEAVE A REPLY](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 36

Which of the following is true with respect to hardware failover or NIC teaming within a Cisco Unified Computing System?

- A.** Hardware failover is specified by the operating system.
- B.** An uplink failure when using automatic pinning requires that hardware failover for the server vNIC be disabled.
- C.** NIC teaming is controlled by the vNIC.

D. The hardware failover option that is available for Ethernet does not affect Fibre Channel traffic.

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 37

Which three options are true regarding port profiles in Cisco UCS Manager? (Choose three.)

- A.** Port profiles define operating-system kernel parameters.
- B.** Port profiles are represented as a port group in vCenter.
- C.** Port profiles can be used by more than one DVS.
- D.** Port profile parameters are visible on vCenter.
- E.** Port profile parameters can be modified from vCenter.
- F.** Port profiles can be modified only from Cisco UCS Manager.

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 38

If there are four I/O module links from the Cisco Unified Computing System 5108 Blade Chassis to the Cisco Unified Computing System 6248UP Fabric Interconnect, which dynamic vNICs can be defined?

- A.** 9
- B.** 16
- C.** 24
- D.** 48
- E.** 54
- F.** 112

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 39

In the Create Dynamic vNIC Connection Policy dialog box, there is a configurable field titled Protection.

What is the significance of the three choices for Protection?

- A.** allows reserve vNICs to be allocated out of the spares pool
- B.** enables hardware-based failover
- C.** enables static binding of the VM port profile to dynamic vNICs

- D. selects the primary fabric association for dynamic vNICs
- E. allows dynamic vNICs to be reserved for fabric failover

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 40

After staging a VEM file on a VMware ESXi 5.0 host in the /tmp directory, what is the correct command syntax to install the VEM?

- A. esxcli software vib install d /tmp/VEM500-20110825132140-BG-release.zip -maintenance-mode
- B. esxcli software vib install v /tmp/VEM500-20110825132140-BG-release.zip -maintenance-mode
- C. esxupdate software vib install d /tmp/VEM500-20110825132140-BG-release.zip -maintenance-mode
- D. esxupdate software vib install v /tmp/VEM500-20110825132140-BG-release.vib -maintenance-mode

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 41

Which two VMware features will not allow an adapter to transition from Cisco VM-FEX standard mode to universal passthrough mode? (Choose two.)

- A. VM Snapshot
- B. Volume Shadow Copy
- C. Storage vMotion
- D. HA
- E. Resource Reservations

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 42

Which two are true concerning the role-based access control specifics of a Cisco Unified Computing System? (Choose two.)

- A. Disabled local user accounts are deleted from the database.

- B.** A locally authenticated user account is any user account that is authenticated through LDAP, RADIUS, or TACACS+.
- C.** If a user maintains a local user account and a remote user account simultaneously, the roles that are defined in the local user account override those that are maintained in the remote user account.
- D.** By default, user accounts expire after 90 days; a warning message will be generated 10 days prior to expiration.
- E.** A user that is assigned one or more roles will be allowed the privileges that are consistent across all of the assigned roles.
- F.** All roles include read access to all configuration settings in the Cisco Unified Computing System domain.

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 43

Which two options occur when a server discovery policy is invoked? (Choose two.)

- A.** executes the qualification in the server discovery policy against the server
- B.** applies the scrub policy to the server
- C.** analyzes the inventory of the server
- D.** assigns the server to the selected organization, if configured
- E.** creates a service profile for the server with the identity burned into the server at time of manufacture

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 44

In a standalone Cisco UCS C-Series server, which recommendations can be used to upgrade the BIOS?

- A.** Cisco IMC
- B.** Cisco UCS Manager
- C.** iFlash32 Utility
- D.** Flash ROM Utility
- E.** EFI Interface
- F.** Cisco Host Upgrade Utility
- G.** USB Flash Utility

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 45

If a customer wants to maximize the capability of server mobility with the Cisco UCS deployment, what two options are Cisco recommended? (Choose two.)

- A. Configure a server inheritance policy.
- B. Configure a Virtual Media boot.
- C. Configure a hardware-based service profile with burned-in addresses and identities.
- D. Configure boot from SAN.
- E. Configure service profiles with resource pools.

Answer: (SHOW ANSWER)

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 46

Which policy is used to update adapter firmware?

- A. adapter policy
- B. host firmware policy
- C. management firmware policy
- D. network control policy

Answer: (SHOW ANSWER)

Section: (none)

Explanation/Reference:

Explanation:

Valid 300-175 Dumps shared by ExamDiscuss.com for Helping Passing 300-175 Exam! ExamDiscuss.com now offer the **newest 300-175 exam dumps**, the ExamDiscuss.com 300-175 exam **questions have been updated** and **answers have been corrected** get the **newest** ExamDiscuss.com 300-175 dumps with Test Engine here:

<https://www.examdumps.com/Cisco/exam/300-175/premium/> (175 Q&As Dumps, **35%OFF**

Special Discount Code: freecram)

NEW QUESTION: 47

Which NIC redundancy modes allow the LOMs to be discovered by the operating system or hypervisor?

- A. Dedicated mode
- B. Active/Active

- C. Active/Standby
- D. Cisco Card Mode

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 48

What is true statement concerning port personalities on the Cisco Unified Computing System 62XX Fabric Interconnect?

- A. Fibre Channel uplink ports must operate in Fibre Channel switching mode.
- B. The fabric interconnects use native FCoE storage ports to directly attach to the SAN infrastructure.
- C. By default, all Fibre Channel ports are unconfigured.
- D. The Fibre Channel uplink ports do not support VSAN trunking and Fibre Channel port channels.
- E. The Fibre Channel storage ports support VSAN trunking and Fibre Channel port channels.

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 49

What are the default settings of the Cisco IMCCIMC NIC properties on a standalone Cisco UCS C- Series server?

- A. 'Shared LOM' NIC mode with 'Active-active' NIC redundancy and DHCP enabled
- B. 'Shared LOM' NIC mode with 'Active-standby' NIC redundancy and DHCP enabled
- C. 'Dedicated' NIC mode with 'Active-standby' NIC redundancy DHCP disabled
- D. 'Dedicated' NIC mode with 'None' NIC redundancy and DHCP enabled
- E. 'Cisco Card' NIC mode with 'Active-active' NIC redundancy and DHCP enabled

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 50

The Cisco Integrated Management Controller on a Cisco Unified Computing System B-Series server provides a number of features. Drag the appropriate feature on the right.

Allows an external UDP connection to the serial console port

Allows Cisco Unified Computing System administrators to connect remotely to the console of any server

Remotely powers a server on or off

IP

S

K

Select and Place:

The Cisco Integrated Management Controller on a Cisco Unified Computing System B-Series server provides a number of features. Drag the appropriate feature on the right.

Allows an external UDP connection to the serial console port

Allows Cisco Unified Computing System administrators to connect remotely to the console of any server


Remotely powers a server on or off

I

S

K

Answer:

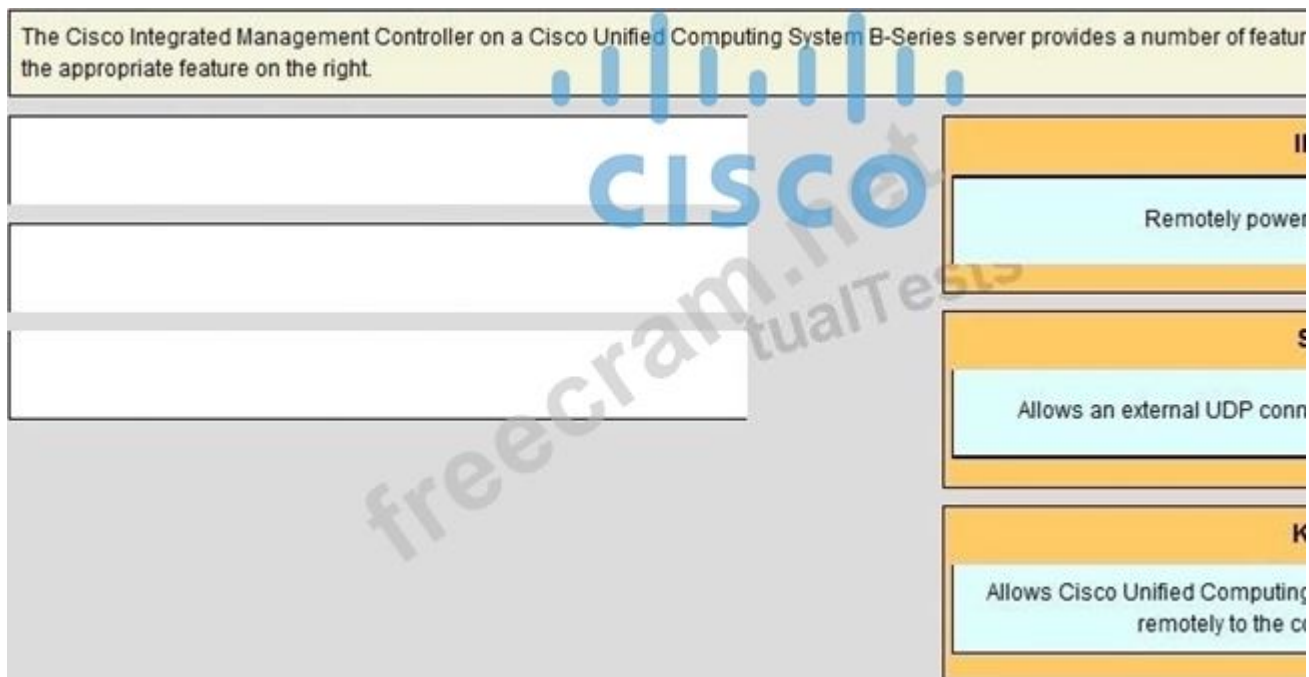

Section: Drag & Drop

NEW QUESTION: 51

Which two of the listed BIOS options are required for VM-FEX in high performance mode? (Choose two.)

- A. RSS
- B. interrupt coherency
- C. virtualization technology
- D. cache validation
- E. ATS support

Answer: C,E (LEAVE A REPLY)

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 52

Which three items represent some of the features that can be defined in a Cisco Unified Computing System Manager port profile? (Choose three.)

- A. QoS policy
- B. ACL
- C. NetFlow
- D. port security
- E. network control policy
- F. VLAN or VLANs

Answer: (SHOW ANSWER)

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 53

Which three items represent some of the components to implement Cisco VM-FEX for Cisco Unified Computing System Manager B-Series blades? (Choose three.)

- A. Cisco VSM VM
- B. VEM installed on the VMware vCenter server
- C. VEM in the VMware ESX or ESXi host
- D. Cisco Unified Computing System Manager version 1.2 or higher
- E. VMware vCenter server
- F. Fibre Channel VMFS volume

Answer: C,D,E ([LEAVE A REPLY](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 54

Which two items can you provision in a vHBA Template? (Choose two.)

- A. Max Data Field Size
- B. SCSI I/O Queues
- C. FCoE VLAN
- D. vHBA Interrupt Mode
- E. Stats Threshold Policy
- F. FLOGI Timeout

Answer: (SHOW ANSWER)

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 55

Which item is required for communication between Cisco Unified Computing System Manager and VMware vCenter?

- A. VeriSign Digital Certificates
- B. RSA Digital Certificates
- C. Cisco Unified Computing System Manager Extension Key
- D. VeriSign Plug-In
- E. VMware vCenter Certificate Services

Answer: (SHOW ANSWER)

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 56

Which three items must be configured in the Port Profile Client in Cisco Unified Computing System Manager? (Choose three.)

- A. port profile
- B. DVS
- C. data center
- D. folder
- E. VMware vCenter IP address
- F. VM port group

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 57

Which of the following is true with respect to recovery from failure with automatic pinning that is configured on a cluster of Cisco Unified Computing System 62XX Fabric Interconnects?

- A. By default, server MAC addresses are pinned to uplink interfaces using PIN groups.
- B. When a northbound fabric interconnect link goes down, the affected servers will use NIC teaming to re-establish connectivity on the second fabric interconnect.
- C. When a northbound fabric interconnect link goes down, the fabric interconnect will send a gratuitous ARP to the northbound switch to announce the servers on the new port.
- D. In the event that all uplink ports on the fabric interconnect lose connectivity, the 22XX I/O module shuts down all of the host ports until at least one uplink is restored.

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 58

DRAG & DROP

This question concerns the installation of a Cisco Unified Computing System blade server I/O module.

Drag the options on the left to the right side in the correct order when performing the installation. Note: Not all of the steps on the

Slide the I/O module into the I/O module slot, ensuring that the I/O module is fully seated	
Connect the networking cables	
Make sure that the two levers at the front of the I/O module are pulled open	
Install the N20-CBLK1 blank to avoid EMI issues	
Close the levers and tighten the captive screw on each lever	

Select and Place:

This question concerns the installation of a Cisco Unified Computing System blade server I/O module.

Drag the options on the left to the right side in the correct order when performing the installation. Note: Not all of the steps on the

Slide the I/O module into the I/O module slot, ensuring that the I/O module is fully seated	
Connect the networking cables	
Make sure that the two levers at the front of the I/O module are pulled open	
Install the N20-CBLK1 blank to avoid EMI issues	
Close the levers and tighten the captive screw on each lever	

Answer:

This question concerns the installation of a Cisco Unified Computing System blade server I/O module.

Drag the options on the left to the right side in the correct order when performing the installation. Note: Not all of the steps on the

Make sure that the two levers at t

Slide the I/O module into the I/O module i

Close the levers and tighten

Connect the r

Install the N20-CBLK1 blank to avoid EMI issues

Section: Drag & Drop

NEW QUESTION: 59

Which two elements are defined in a dynamic vNIC connection policy? (Choose two.)

- A. adapter policy
- B. QoS policy
- C. network control policy
- D. number of dynamic vNICs
- E. jumbo frame size

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 60

Which item describes the failure scenario called a "split-brain" in the Cisco Unified Computing System?

- A. failure of the Cisco Unified Computing System L1-L2 network
- B. failure of a Cisco Unified Computing System Chassis Management Controller
- C. failure of a Cisco Unified Computing System I/O module
- D. failure of a Cisco Unified Computing System Fabric Interconnect
- E. failure of a Cisco Unified Computing System Chassis Management Switch

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 61

The Cisco UCS administrator has the chassis discovery policy set to "2-link". The administrator connects a new chassis to the Cisco UCS 6200 Series Fabric Interconnects using four links.

Which option about link utilization is true?

- A. The Cisco UCS will use two links until the chassis is reacknowledged, after which it will use all four links.
- B. The Cisco UCS will use all four links for discovery.
- C. The Cisco UCS will use only two links. The other two links are unusable.
- D. The Cisco UCS will use only two links. However, the administrator can manually pin traffic to the extra links by using service profiles.

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

Valid 300-175 Dumps shared by ExamDiscuss.com for Helping Passing 300-175 Exam! ExamDiscuss.com now offer the **newest 300-175 exam dumps**, the ExamDiscuss.com 300-175 exam **questions have been updated** and **answers have been corrected** get the **newest** ExamDiscuss.com 300-175 dumps with Test Engine here:
<https://www.examdiscuss.com/Cisco/exam/300-175/premium/> (175 Q&As Dumps, **35%OFF**
Special Discount Code: freecram)

NEW QUESTION: 62

Which of the following is true concerning the Global Chassis Discovery policy configuration on the Cisco Unified Computing System Manager when using Cisco Unified Computing System 22XX I/O modules with Cisco UCS 62XX Fabric Interconnects?

- A. The link grouping preference should be set to discrete mode when the number of northbound links are not a power of 2.
- B. Set the action policy-count higher than the actual number of uplinks; otherwise, the Cisco Unified Computing System servers will not be discovered.
- C. For Cisco Unified Computing System implementations that mix I/O modules with different numbers of links, it is best to manually reacknowledge the chassis in order to use all available links.
- D. Automatic reacknowledgement due to chassis discovery is never disruptive.

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 63

In which situation would you be required to change a Cisco UCS system from end-host mode to switching mode?

- A. Design requirements call for the use of fabric failover.
- B. Fabric interconnect is connecting to disjoint Layer 2 networks upstream.
- C. HSRP routers are directly connected to the fabric interconnect.
- D. Upstream Cisco Nexus 5000 is configured for vPC.

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 64

This question concerns the installation of a Cisco Unified Computing System blade server hard drive.

Drag the options on the left to the right side in the correct order when performing the installation. Note: Not all of the steps on the left are required.

Push the hard drive lever into the closed position	
Remove the blade server from the chassis	
Place the hard drive lever into the open position by pushing the release button	
Uncover with hard drive cover plates	
Gently slide the hard drive into the opening in the blade server until it seats into place	

freeexam.net
ActualTests
CISCO

Select and Place:

This question concerns the installation of a Cisco Unified Computing System blade server hard drive.

Drag the options on the left to the right side in the correct order when performing the installation. Note: Not all of the steps on the left are required.

Push the hard drive lever into the closed position	
Remove the blade server from the chassis	
Place the hard drive lever into the open position by pushing the release button	
Uncover with hard drive cover plates	
Gently slide the hard drive into the opening in the blade server until it seats into place	

Answer:

This question concerns the installation of a Cisco Unified Computing System blade server hard drive.

Drag the options on the left to the right side in the correct order when performing the installation. Note: Not all of the steps on the left are required.

	Place the hard drive lever into the open position by pushing the release button
Remove the blade server from the chassis	Gently slide the hard drive into the opening in the blade server until it seats into place
	Push the hard drive lever into the closed position
Uncover with hard drive cover plates	

Section: Drag & Drop

NEW QUESTION: 65

Which three items represent message formats that are available to send fault data using Cisco Call Home?

(Choose three.)

- A. short text
- B. long text
- C. HTML
- D. SOAP API

E. XML

F. Java

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 66

Which virtual hardware version is required for a VM to enter the Cisco VM-FEX universal passthrough mode?

A. Version 5

B. Version 6

C. Version 7

D. Version 8

E. Version 9

Answer: D ([LEAVE A REPLY](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 67

Instructions

Open the windows by clicking on the minimized title at the bottom of the viewing area. Windows can be minimized by clicking on the [X], repositioned by dragging the title bar, and resized by using the handle at the lower right corner to customize the viewing area.

If you are required to access the devices to complete this scenario, the mouse cursor will use a hand symbol when moved over device icons. Clicking the icon will open a device terminal so you can interact with the hardware.

Open the Questions window and begin by clicking a question number. When you have completed answering all questions, click Done to continue.

Scenario

Use your UCS knowledge on Adapter errors u configurations.

Exhibit1

```
UCS-A# scope server 1/5
UCS-A /chassis/server # show adapter detail

Adapter:
  Id: 2
  Product Name: Cisco UCS 82598KR-CI
  PID: N20-AI0002
  VID: V01
  Vendor: Cisco Systems Inc
  Serial: QCI132300CG
  Revision: 0
  Mfg Date: 2009-06-13T00:00:00.000
  Slot: N/A
  Overall Status: Operable
  Conn Path: A,B
  Conn Status: Unknown
  Managing Instance: B
  Product Description: PCI Express Dual Port 10 Gigabit Ethernet Serv
UCS-A /chassis/server #
```

Current Adapter status is?

- A. Operable
- B. Down
- C. Inoperable
- D. Unknown

Answer: ([SHOW ANSWER](#))

Section: Hot Spot

Explanation/Reference:

Questions

1

Current Adapter Status is ?

2

☒ Operable

3

☐ Down

4

☐ Inoperable

☐ Unknown

Explanation: Operable

NEW QUESTION: 68

Instructions

Open the windows by clicking on the minimized title at the bottom of the viewing area. Windows can be minimized by clicking on the [-], repositioned by dragging the title bar, and resized by using the handle at the lower right corner to customize the viewing area.

If you are required to access the devices to complete this scenario, the mouse cursor will use a hand symbol when moved over device icons. Click the icon to open a device terminal to interact with the hardware.

Open the **Questions** window and begin by clicking a question number. When you have completed answering all questions, click **Done** to continue.

Scenario

Use your UCS knowledge on Fabric Interconnect Fa UCS cluster.

Exhibit1

```
UCS-A# show cluster state
Cluster Id: 0xfc436fa8b88511e0-0xa370000573cb6c04

A: UP, PRIMARY
B: UP, SUBORDINATE

HA READY
UCS-A# connect local-mgmt
Cisco Nexus Operating System (NX-OS) Software
TAC support: http://www.cisco.com/tac
Copyright (c) 2002-2011, Cisco Systems, Inc. All rights reserved.
The copyrights to certain works contained in this software are
owned by other third parties and used and distributed under
license. Certain components of this software are licensed under
the GNU General Public License (GPL) version 2.0 or the GNU
Lesser General Public License (LGPL) Version 2.1. A copy of each
such license is available at
http://www.opensource.org/licenses/gpl-2.0.php and
http://www.opensource.org/licenses/lgpl-2.1.php

UCS-A(local-mgmt)# cluster lead b
UCS-A(local-mgmt)#
```

The connect local-mgmt command is required.

- A. to allow the fabric interconnect to use force command to be subordinate.
- B. to allow local management of the cluster to be configured.
- C. To configure HA on all fabric interconnect.
- D. To enable the fabric interconnect for a different HA state.

Answer: (SHOW ANSWER)

Section: Hot Spot

Explanation/Reference:

Questions

1

The connect local-mgmt command is required

2

☐ to allow the fabric interconnect to use the force command to be subordinate

3

☒ To allow local management of the cluster to be configured.

☐ To configure HA on all fabric interconnect.

☐ To enable the fabric interconnect for a different HA state.

Explanation: to allow local management of the cluster to be configured.

NEW QUESTION: 69

Instructions
 Open the windows by clicking on the minimized title at the bottom of the viewing area. Windows can be minimized by clicking on the [-], repositioned by dragging the title bar, and resized by using the handle at the lower right corner to customize the viewing area.

 If you are required to access the devices to complete this scenario, the mouse cursor will use a hand symbol when moved over device icons. Click the icon to open a device terminal to interact with the hardware.

 Open the **Questions** window and begin by clicking a question number. When you have completed answering all questions, click **Done** to continue.

Scenario
 Use your UCS knowledge on Fabric Interconnect Fa UCS cluster.

Exhibit1

```

UCS-A# show cluster state
Cluster Id: 0xfc436fa8b88511e0-0xa370000573cb6c04
A: UP, PRIMARY
B: UP, SUBORDINATE

HA READY
UCS-A# connect local-mgmt
Cisco Nexus Operating System (NX-OS) Software
TAC support: http://www.cisco.com/tac
Copyright (c) 2002-2011, Cisco Systems, Inc. All rights reserved.
The copyrights to certain works contained in this software are
owned by other third parties and used and distributed under
license. Certain components of this software are licensed under
the GNU General Public License (GPL) version 2.0 or the GNU
Lesser General Public License (LGPL) Version 2.1. A copy of each
such license is available at
http://www.opensource.org/licenses/gpl-2.0.php and
http://www.opensource.org/licenses/lgpl-2.1.php

UCS-A(local-mgmt)# cluster lead b
UCS-A(local-mgmt)#

```

The cluster lead b command represent.

- A. The cluster will go into a subordinate state.
- B. The cluster will switch fabric interconnect b from subordinate to lead or primary.
- C. The cluster will only use fabric interconnect b.
- D. The cluster will load balance traffic over Fabric interconnects a and b.

Answer: (SHOW ANSWER)

Section: Hot Spot

Explanation/Reference:

Questions

- 1 The Cluster lead b command represents
- 2 ☐ The cluster will go into a subordinate state.
- 3 ☒ The cluster will switch fabric interconnect b from subordinate to lead or primary.
- ☐ The cluster will only use fabric interconnect b.
- ☐ The cluster will load balance traffic over Fabric Interconnects a and b.

Explanation: The cluster will switch fabric interconnect b from subordinate to lead or primary.

NEW QUESTION: 70

What is the maximum number of ports on a VMware vCenter Distributed Virtual Switch?

- A. 64
- B. 128
- C. 1024
- D. 4096
- E. 8192

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 71

How does a Cisco Unified Computing System react when configured for disjoint Layer 2 domains?

- A. Automatic pinning is disabled; VLAN membership must be statically pinned to the uplink ports.
- B. VLANs must be divided between the fabric interconnects using PIN groups.
- C. The VLAN traffic for a disjoint network can only travel along an uplink that is specifically assigned to this VLAN and is selectively excluded from all other uplinks.
- D. When you configure disjoint Layer 2 networks, you must assign VLANs to uplink interfaces.

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 72

When cabling a Cisco UCS 6200 Series Fabric Interconnect to disjoint Layer 2 networks, which option must be considered?

- A. The fabric interconnect must be in switching mode.
- B. You must first configure a LAN pin group.
- C. Each VLAN is allowed across multiple disjoint uplinks.
- D. Each vNIC can communicate to a single disjoint network.

Answer: D ([LEAVE A REPLY](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 73

Drag the characteristic on the left to the most appropriate Cisco Unified Computing System 62XX Fibre Channel switching mode

NP_Port to F_Port	NPV
No Fibre Channel domain ID	
Default zoning or zone merge	
No zoning required	
N_Port to F_Port	Fibre Channel
Fibre Channel domain ID	

Select and Place:

Drag the characteristic on the left to the most appropriate Cisco Unified Computing System 62XX Fibre Channel switching mode

NP_Port to F_Port	NPV
No Fibre Channel domain ID	
Default zoning or zone merge	
No zoning required	
N_Port to F_Port	Fibre Channel
Fibre Channel domain ID	

Answer:

Drag the characteristic on the left to the most appropriate Cisco Unified Computing System 62XX Fibre Channel switching mode

NPV

- NP_Po
- No Fibre Ch
- No zoni

Fibre Channel

- N_Por
- Fibre Chan
- Default zoni

Section: Drag & Drop

NEW QUESTION: 74

Which two policies can be configured in a port profile for VM-FEX high-performance mode?
(Choose two.)

- A. QoS policy
- B. network control policy
- C. adapter policy
- D. BIOS policy
- E. vNIC connection policy

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 75

Which network driver is required on a VMware ESXi 5.0 host for a vNIC to enter Cisco VM-FEX universal passthrough mode?

- A. VMXNET3
- B. Vlance
- C. Flexible
- D. E1000e
- E. VMXNET5

Answer: A ([LEAVE A REPLY](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 76

Which two are true with respect to the upgrade process for the Cisco Unified Computing System? (Choose two.)

- A.** For easier manageability, Cisco provides one full bundle that contains the firmware images for all Cisco Unified Computing System components.
- B.** You can choose from FTP, TFTP, SCP, and HTTP to copy the bundle image from a remote file system.
- C.** When the bundle image is downloaded, it must be transferred to the flash file system of the active fabric interconnect.
- D.** When the download is successful, Cisco Unified Computing System Manager expands the individual files from the archive and installs them in the correct flash file system partition.
- E.** It is strongly recommended that you activate all components in all chassis at one time.
- F.** The I/O module, CIMC, and adaptors update process operates strictly on the backup partition of Flash for a given component.

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

Valid 300-175 Dumps shared by ExamDiscuss.com for Helping Passing 300-175 Exam! ExamDiscuss.com now offer the **newest 300-175 exam dumps**, the ExamDiscuss.com 300-175 exam **questions have been updated** and **answers have been corrected** get the **newest** ExamDiscuss.com 300-175 dumps with Test Engine here:

<https://www.examdiscuss.com/Cisco/exam/300-175/premium/> (175 Q&As Dumps, **35%OFF**

Special Discount Code: **freecram**)

NEW QUESTION: 77

Instructions

Open the windows by clicking on the minimized title at the bottom of the viewing area. Windows can be minimized by clicking on the [X], repositioned by dragging the title bar, and resized by using the handle at the lower right corner to customize the viewing area.

If you are required to access the devices to complete this scenario, the mouse cursor will use a hand symbol when moved over device icons. Clicking the icon will open a device terminal so you can interact with the hardware.

Open the Questions window and begin by clicking a question number. When you have completed answering all questions, click Done to continue.

Scenario

Use your UCS knowledge on Adapter errors u configurations.

Exhibit1

```

UCS-A# scope server 1/5
UCS-A /chassis/server # show adapter detail

Adapter:
  Id: 2
  Product Name: Cisco UCS 82598KR-CI
  PID: N20-AI0002
  VID: V01
  Vendor: Cisco Systems Inc
  Serial: QCI132300CG
  Revision: 0
  Mfg Date: 2009-06-13T00:00:00.000
  Slot: N/A
  Overall Status: Operable
  Conn Path: A,B
  Conn Status: Unknown
  Managing Instance: B
  Product Description: PCI Express Dual Port 10 Gigabit Ethernet Serv
UCS-A /chassis/server #

```

Current Adapter Connected Status is?

- A. Operable
- B. Down
- C. Inoperable
- D. Unknown

Answer: D (LEAVE A REPLY)

Section: Hot Spot

Explanation/Reference:

1 Current Adapter Connected Status is?

2 ☐ Operable

3 ☐ Down

4 ☐ Inoperable

☒ Unknown

Explanation: Unknown

NEW QUESTION: 78

Which VMware ESXi 5.0 CLI command will validate PassThru interfaces when they are available?

- A. vem status -v

- B. vempassthru-v
- C. vemintf -v
- D. vemifconfig -v
- E. vempts -v

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 79

Which Cisco UCS Manager feature allows you to specify multiple LDAP servers for user authentication?

- A. Realm
- B. LDAP Provider Group
- C. Authentication Domain
- D. Organization

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

NEW QUESTION: 80

Which Cisco UCS firmware are contained in the Cisco UCS Infrastructure software bundle? (Choose three.)

- A. Cisco UCS BIOS
- B. Cisco UCS fabric interconnects firmware
- C. Cisco UCS adapters
- D. Cisco UCS Manager
- E. Cisco I/O module firmware
- F. Cisco IMC

Answer: ([SHOW ANSWER](#))

Section: Questions

Explanation/Reference:

Explanation:

Valid 300-175 Dumps shared by ExamDiscuss.com for Helping Passing 300-175 Exam!
ExamDiscuss.com now offer the **newest 300-175 exam dumps**, the ExamDiscuss.com 300-175 exam **questions have been updated** and **answers have been corrected** get the **newest** ExamDiscuss.com 300-175 dumps with Test Engine here:

<https://www.examdisscuss.com/Cisco/exam/300-175/premium/> (175 Q&As Dumps, 35%OFF

Special Discount Code: **freecram**)