

Microsoft.AZ-801.v2026-10-19.q146

Exam Code:	AZ-801
Exam Name:	Configuring Windows Server Hybrid Advanced Services
Certification Provider:	Microsoft
Free Question Number:	146
Version:	v2026-10-19
# of views:	102
# of Questions views:	1461
https://www.freecram.net/torrent/Microsoft.AZ-801.v2026-10-19.q146.html	

NEW QUESTION: 1

You need to meet the technical requirements for Cluster2.
Which four actions should you perform in sequence before you can enable replication? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Actions

Create an Azure Recovery Services vault.

Install Azure Connected Machine agents.

Install and register Azure Site Recovery Providers.

Create and associate replication policies.

Create a Hyper-V site.

Answer Area

Answer:

Actions

Create an Azure Recovery Services vault.

Install Azure Connected Machine agents.

Install and register Azure Site Recovery Providers.

Create and associate replication policies.

Create a Hyper-V site.

Answer Area

Create an Azure Recovery Services vault.

Create a Hyper-V site.

Install and register Azure Site Recovery Providers.

Create and associate replication policies.

Explanation:

Create an Azure Recovery Services vault.

Create a Hyper-V site.

Install and register Azure Site Recovery Providers.

Create and associate replication policies.

Reference:
<https://docs.microsoft.com/en-us/azure/site-recovery/hyper-v-azure-tutorial>

NEW QUESTION: 2

You have an Azure subscription that contains a user named User1 and the resources shown in the following table.

Name	Description
VNet1	Virtual network
AppSvr1	Virtual machine that is connected to VNet1 and runs a legacy app.
GW1	Virtual network gateway on VNet1

User1 has a computer named Computer1 that runs Windows 11. User1 works from home and establishes a Point-to-Site (P2S) connection to GW1 to access AppSvr1.

You deploy the resources shown in the following table.

Name	Description
VNet2	Virtual network that is peered with VNet1
AppSvr2	Virtual machine that is connected to VNet2

User1 cannot access AppSvr2.

You need to ensure that User1 can access AppSvr2.

What should you do?

- A. On Computer1, modify the Windows Defender Firewall settings.
- B. On Computer1, download and reinstall the VPN client.
- C. Add a service endpoint to VNet2.
- D. Create a route table and associate the table with GatewaySubnet on VNet1

Answer: B (LEAVE A REPLY)

NEW QUESTION: 3

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

Your network contains a single-domain Active Directory Domain Services (AD DS) forest named contoso.

com. The functional level of the forest is Windows Server 2012 R2. All domain controllers run Windows Server 2012 R2.

Sysvol replicates by using the File Replication Service (FRS).

You plan to replace the existing domain controllers with new domain controllers that will run Windows Server 2022.

You need to ensure that you can add the first domain controller that runs Windows Server 2022.

Solution: You upgrade the PDC emulator.

Does this meet the goal?

- A. Yes
- B. No

Answer: (SHOW ANSWER)

NEW QUESTION: 4

You have a server named Server1 that runs Windows Server. You install System Insights on Server 1.

You need to modify the schedule for storage consumption forecasting. What should you use?

- A. Performance Monitor
- B. Server Manager
- C. Resource Monitor
- D. Windows Admin Center

Answer: (SHOW ANSWER)

NEW QUESTION: 5

You have a Site-to-Site VPN between an on-premises network and an Azure VPN gateway. BGP is disabled for the Site-to-Site VPN.

You have an Azure virtual network named Vnet1 that contains a subnet named Subnet1. Subnet1 contains a virtual machine named Server1.

You can connect to Server1 from the on-premises network.

You extend the address space of Vnet1. You add a subnet named Subnet2 to Vnet1. Subnet2 uses the extended address space. You deploy an Azure virtual machine named Server2 to Subnet2.

You cannot connect to Server2 from the on-premises network. Server1 can connect to Server2.

You need to ensure that you can connect to Subnet2 from the on-premises network.

What should you do?

- A. To Subnet2. add a route table that contains a user-defined route.
- B. Update the routing information on the on-premises routers.
- C. Add an additional Site-to-Site VPN between the on-premises network and Vnetl.
- D. Add a private endpoint to Subnet2.

Answer: B (LEAVE A REPLY)

NEW QUESTION: 6

Your on-premises network contains an Active Directory Domain Services (AD DS) domain. The domain contains the servers shown in the following table.

Name	Description
HV1	Runs Windows Server and has the Hyper-V role installed
FS1	Runs Windows Server, has the File Server role installed, and hosts a petabyte (PB) of archived data

You have an Azure subscription.

You plan to migrate the data on FS1 to Azure by using Azure Data Box Gateway.

You need to configure a Data Box Gateway virtual device.

Which four actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

ACTIONS

- From the Azure portal, create a Storage Sync Service.
- Install the Azure File Sync agent on FS1.
- Configure Hyper-V Replica on HV1.
- From the Azure portal, create the Data Box Gateway resource.
- Download the virtual device image.
- Create a virtual machine on HV1.
- Activate the Data Box Gateway virtual device on HV1.

Answer Area



Answer:

Actions

- From the Azure portal, create a Storage Sync Service.
- Install the Azure File Sync agent on FS1.
- Configure Hyper-V Replica on HV1.
- From the Azure portal, create the Data Box Gateway resource.
- Download the virtual device image.
- Create a virtual machine on HV1.
- Activate the Data Box Gateway virtual device on HV1.

Answer Area

- From the Azure portal, create the Data Box Gateway resource.
- Download the virtual device image.
- Create a virtual machine on HV1.
- Activate the Data Box Gateway virtual device on HV1.

Explanation:

ACTIONS

⋮ From the Azure portal, create a Storage Sync Service.

⋮ Install the Azure File Sync agent on FS1.

⋮ Configure Hyper-V Replica on HV1.

Answer Area

1

⋮ From the Azure portal, create the Data Box Gateway resource.

2

⋮ Download the virtual device image.

3

⋮ Create a virtual machine on HV1.

4

⋮ Activate the Data Box Gateway virtual device on HV1.

NEW QUESTION: 7

Your network contains an Active Directory Domain Services (AD DS) forest. The forest functional level is Windows Server 2012 R2. The forest contains the domains shown in the following table.

Name	Operating system of all domain controllers	Domain functional level
contoso.com	Windows Server 2016	Windows Server 2012 R2
east.contoso.com	Windows Server 2019	Windows Seryer 2016

- You create a user named Admin1.
- You need to ensure that Admin1 can add a new domain controller that runs Windows Server 2022 to the east.contoso.com domain. The solution must follow the principle of least privilege.
- To which groups should you add Admin1?
- A. CONTOSO\Enterprise Admins and CONTOSO\Schema Admins
 - B. CONTOSO\Enterprise Admins only
 - C. EAST\Domain Admins only
 - D. CONTOSO\Schema Admins and EAST\Domain Admins

Answer: (SHOW ANSWER)

NEW QUESTION: 8

- You have a server that runs Windows Server.
- You plan to back up the server to an Azure Recovery Services vault once per week starting on the next Saturday.
- You need to schedule the weekly backup and perform the initial backup as soon as possible.
- In which order should you perform the actions? To answer, move all actions from the list of actions to the answer are and arrange them in the correct order.

Actions

- Run the Register Server Wizard.
- From Microsoft Azure Backup, run the Schedule Backup Wizard.
- From Microsoft Azure Backup, run the Back Up Now Wizard.
- Download the Microsoft Azure Recovery Services (MARS) agent and the Vault Credentials file.
- Run the Microsoft Azure Recovery Services Agent Setup Wizard.

Answer Area

Answer:

Actions

- Run the Register Server Wizard.
- From Microsoft Azure Backup, run the Schedule Backup Wizard.
- From Microsoft Azure Backup, run the Back Up Now Wizard.
- Download the Microsoft Azure Recovery Services (MARS) agent and the Vault Credentials file.
- Run the Microsoft Azure Recovery Services Agent Setup Wizard.

Answer Area

- Download the Microsoft Azure Recovery Services (MARS) agent and the Vault Credentials file.
- Run the Microsoft Azure Recovery Services Agent Setup Wizard.
- Run the Register Server Wizard.
- Run the Microsoft Azure Recovery Services Agent Setup Wizard.
- From Microsoft Azure Backup, run the Back Up Now Wizard.

Explanation:

Download the Microsoft Azure Recovery Services (MARS) agent and the Vault Credentials file.

Run the Microsoft Azure Recovery Services Agent Setup Wizard.

Run the Register Server Wizard.

From Microsoft Azure Backup, run the Schedule Backup Wizard.

From Microsoft Azure Backup, run the Back Up Now Wizard.

Reference:

- <https://docs.microsoft.com/en-us/azure/backup/install-mars-agent#download-the-mars-agent>
- <https://docs.microsoft.com/en-us/azure/backup/backup-windows-with-mars-agent>

NEW QUESTION: 9

You have a server named Server1 that runs Windows Server and has the Hyper-V server role installed. You have a Hyper-V failover cluster named Cluster1. All servers are members of the same domain.

You need to ensure that you use Hyper-V Replica with Kerberos authentication on the default port to replicate virtual machines from Cluster1 to Server1.

What should you do on Server1?

- A.** Add primary servers to the Hyper-V Replica Broker configuration.
- B.** From Hyper-V Settings, select Enable incoming and outgoing live migrations

- C. From Windows Defender Firewall with Advanced Security, enable the Hyper-V Replica HTTPS Listener (TCP-In) rule.
- D. From Windows Defender Firewall with Advanced Security, enable the Hyper-V Replica HTTP Listener (TCP-In) rule.

Answer: (SHOW ANSWER)

Reference:

<https://docs.microsoft.com/en-us/windows-server/virtualization/hyper-v/manage/set-up-hyper-v-replica>

NEW QUESTION: 10

You have an Azure subscription that contains a network security group (NSG) named NSG1 and a virtual network named VNet1. NSG1 contains only default security rules. VNet1 contains the subnets shown in the following table.

Name	IP address space
Subnet1	10.10.0.0/24
Subnet2	172.16.0.0/24
Subnet3	192.168.10.0/24

The subscription contains virtual machines that run Windows Server as shown in the following table.

Name	Connected to	Listening ports	Associated NSG
VM1	Subnet1	3389	NSG1
VM2	Subnet2	3389	NSG1
VM3	Subnet3	3389, 8080	NSG1

You configure just-in-time (JIT) VM access as shown in the following exhibit.

Home > Just-in-time VM access >

JIT VM access configuration

VM1

+ Add

Save

Discard

Configure the ports for which the just-in-time VM access will be applicable

Port	Protocol	Allowed source IPs	IP range	Time range (hours)
3389	Any	CIDR	10.10.0.0/24,192.168.10.0/24	3 hours
8080	Any	Per request	N/A	5 hours

for each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point

Answer Area

Statements

From VM1, a Remote Desktop connection to VM3 will be terminated after three hours.

Yes

No

☐☐

From VM2, you must request access before you can establish a Remote Desktop connection to VM1.

☐☐

From VM3, you can establish a Remote Desktop connection to VM1 without requesting access.

☐☐

Answer:

Answer Area

Statements

From VM1, a Remote Desktop connection to VM3 will be terminated after three hours.

Yes

No

☐

☒

From VM2, you must request access before you can establish a Remote Desktop connection to VM1.

☒

☐

From VM3, you can establish a Remote Desktop connection to VM1 without requesting access.

☒

☐

Explanation:

Answer Area

Statements

From VM1, a Remote Desktop connection to VM3 will be terminated after three hours.

Yes

No

☐

☒

From VM2, you must request access before you can establish a Remote Desktop connection to VM1.

☒

☐

From VM3, you can establish a Remote Desktop connection to VM1 without requesting access.

☒

☐

NEW QUESTION: 11

You have an on-premises server named Server1 that runs Windows Server and contains the shares shown in the following table.

Name	Type
Share1	SMB
Share2	NFS

You have an Azure subscription named Sub1 that contains an Azure Storage Mover resource named Mover1 and the storage accounts shown in the following table.

Name	Kind	Performance	Hierarchical namespace
storage1	FileStorage	Premium	Not applicable
storage2	StorageV2	Standard	Enabled

The storage accounts contain the resources shown in the following table.

Name	Storage account	Type
azshare1	storage1	File share
azshare2	storage2	File share
azcont1	storage2	Blob container

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
Share1 can be migrated to azshare1 by using Mover1.	☐	☐
Share2 can be migrated to azshare2 by using Mover1.	☐	☐
Share2 can be migrated to azcont1 by using Mover1.	☐	☐

Answer:

Statements	Yes	No
Share1 can be migrated to azshare1 by using Mover1.	☐	☐
Share2 can be migrated to azshare2 by using Mover1.	☐	☐
Share2 can be migrated to azcont1 by using Mover1.	☐	☐

Explanation:

Answer Area

Statements	Yes	No
Share1 can be migrated to azshare1 by using Mover1.	☒	☐
Share2 can be migrated to azshare2 by using Mover1.	☒	☐
Share2 can be migrated to azcont1 by using Mover1.	☐	☒

NEW QUESTION: 12

You have an Azure subscription that contains two virtual machines named VM1 and VM2. VM1 runs Windows Server. VM2 runs Ubuntu Linux. You need to monitor VM1 and VM2 by using VM insights. The solution must meet the following requirements:

* Ensure that you can monitor the memory usage on VM1.
* Ensure that you run the Map feature on VM2.
The solution must minimize the number of agents required for each virtual machine.
Which agents are required on each virtual machine? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

Answer Area

VM1:

The Azure Connected Machine agent only

The Azure Monitor Agent only

The Azure Monitor Agent and Dependency agent only

The Azure Monitor Agent, Dependency agent, and Azure Connected Machine agent

VM2:

The Azure Linux VM Agent only

The Azure Monitor Agent only

The Azure Monitor Agent and Dependency agent only

The Azure Monitor Agent, Dependency agent, and Azure Linux VM Agent

Answer:

Answer Area

VM1:

The Azure Connected Machine agent only

The Azure Monitor Agent only

The Azure Monitor Agent and Dependency agent only

The Azure Monitor Agent, Dependency agent, and Azure Connected Machine agent

VM2:

The Azure Linux VM Agent only

The Azure Monitor Agent only

The Azure Monitor Agent and Dependency agent only

The Azure Monitor Agent, Dependency agent, and Azure Linux VM Agent

Explanation:

Answer Area

VM1:

VM2:



NEW QUESTION: 13

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have an on-premises server named Server1 that runs Windows Server.

You have a Microsoft Sentinel instance.

You add the Windows Firewall data connector in Microsoft Sentinel.

You need to ensure that Microsoft Sentinel can collect Windows Firewall logs from Server1.

Solution: You install the Microsoft Integration Runtime on Server1.

Does this meet the goal?

A. No

B. Yes

Answer: ([SHOW ANSWER](#))


NEW QUESTION: 14

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.


After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have a failover cluster named Cluster1 that hosts an application named Appl.

The General tab in App1 Properties is shown in the General exhibit (Click the General tab.)

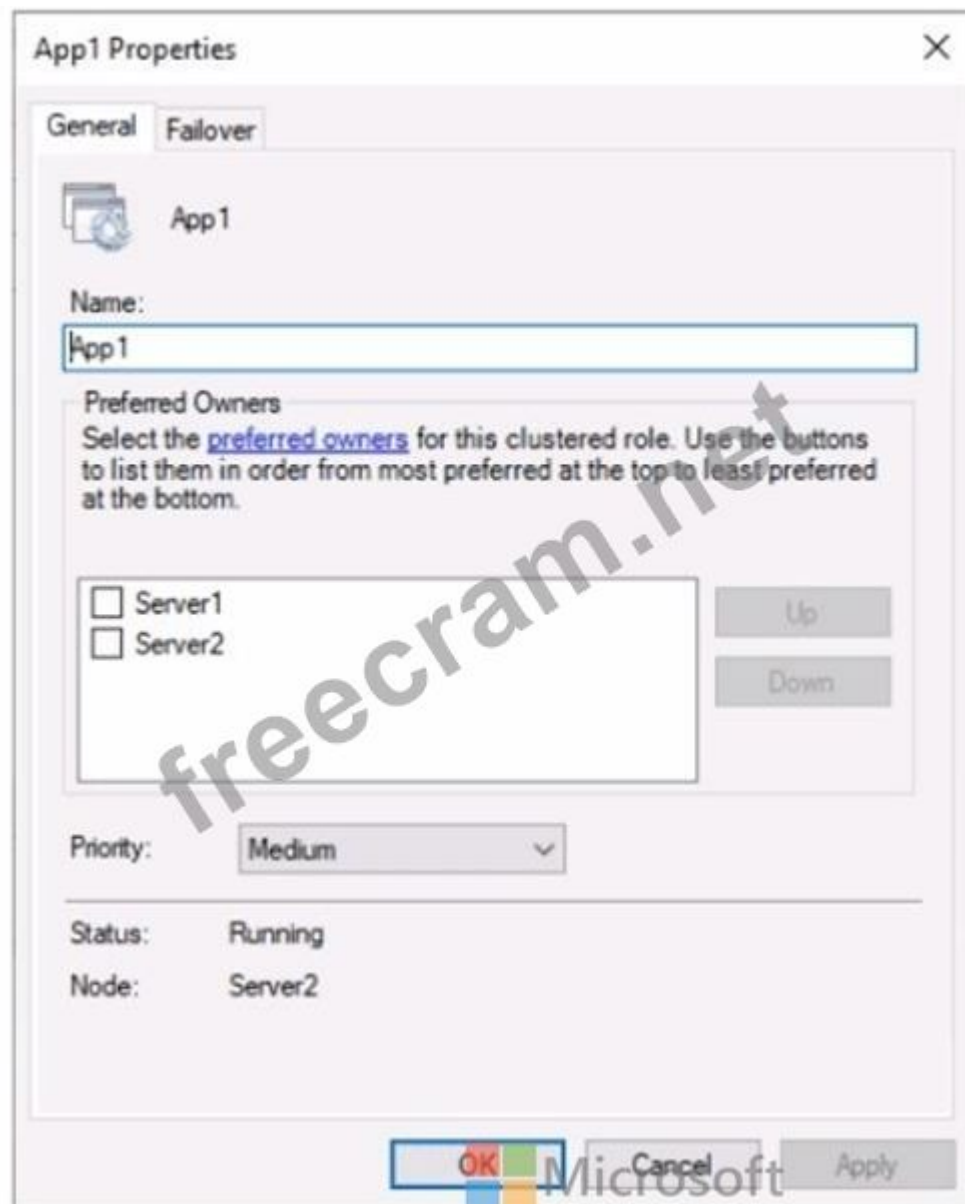

The Failover tab in App1 Properties is shown in the Failover exhibit. (Click the Failover tab.)

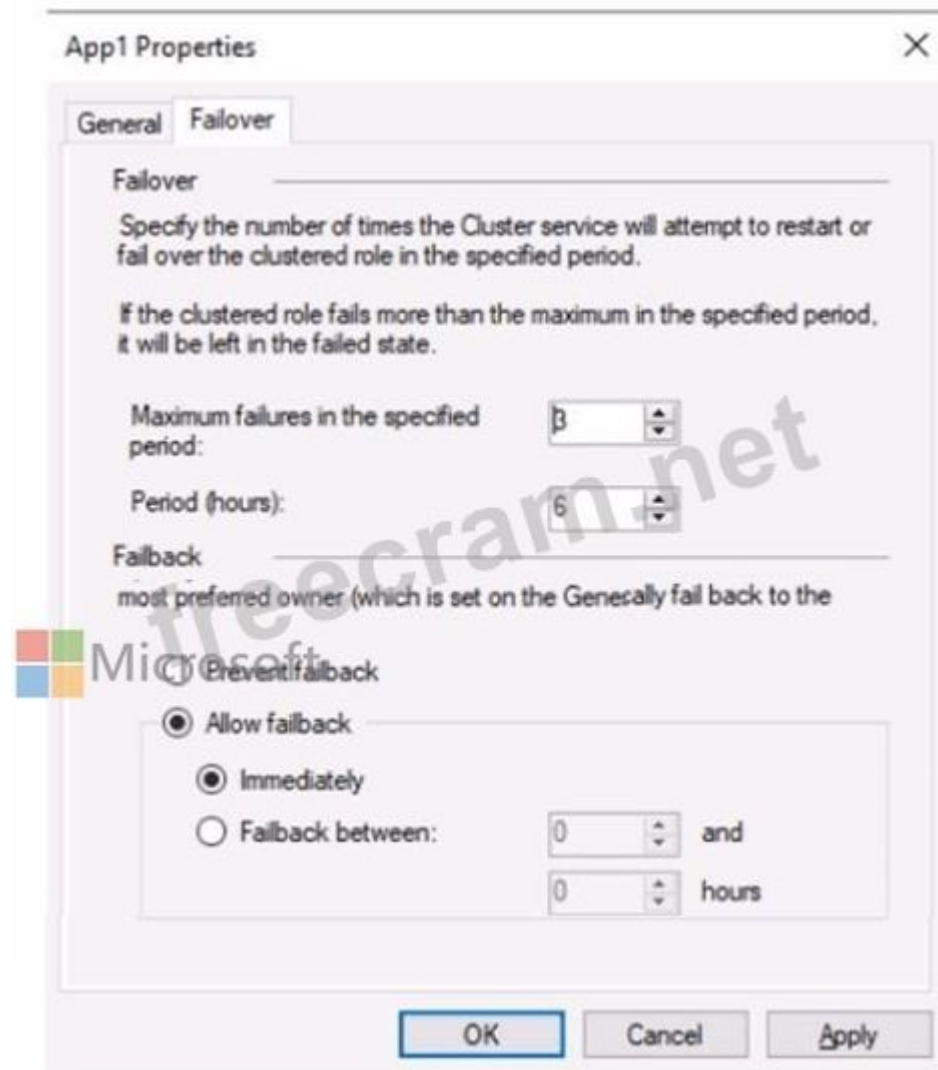

Server2 shuts down unexpectedly.

You need to ensure that when you start Server2, App1 continues to run on Server2.

Solution: You pause the Server1 node in Cluster1 and then start Server1.

Does this meet the goal?

A. No

B. Yes

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 15

You have an on-premises server named Server1 that runs Windows Server. You need to perform an on- demand backup of the files on Server 1 by using Azure Backup.

Which five actions should you perform in sequence? To answer, move the appropriate actions actions from the list of actions to the answer are and arrange them in the correct order.

From the Azure portal, create a Recovery Services vault.

On Server1, run the Microsoft Azure Recovery Services Agent Setup Wizard.

From the Azure portal, download the Microsoft Azure Recovery Services (MARS) agent and the vault credentials.

From the Azure portal, create a Backup vault.

On Server1, run the Schedule Backup Wizard.

Microsoft

Answer:

From the Azure portal, create a Recovery Services vault.

On Server1, run the Microsoft Azure Recovery Services Agent Setup Wizard.

From the Azure portal, download the Microsoft Azure Recovery Services (MARS) agent and the vault credentials.

From the Azure portal, create a Backup vault.

On Server1, run the Schedule Backup Wizard.

From the Azure portal, create a Recovery Services vault.

On Server1, run the Microsoft Azure Recovery Services Agent Setup Wizard.

From the Azure portal, download the Microsoft Azure Recovery Services (MARS) agent and the vault credentials.

From the Azure portal, create a Backup vault.

On Server1, run the Schedule Backup Wizard.

Microsoft

Explanation:

Answer Area

1

From the Azure portal, create a Recovery Services vault.

2

On Server1, run the Microsoft Azure Recovery Services Agent Setup Wizard.

3

From the Azure portal, download the Microsoft Azure Recovery Services (MARS) agent and the vault credentials.

4

From the Azure portal, create a Backup vault.

5

On Server1, run the Schedule Backup Wizard.

NEW QUESTION: 16

Your network contains an Active Directory Domain Services (AD DS) forest. The forest contains the domains shown in the following table.

Name	Domain controller	Configuration
fabrikam.com	DC1	PDC emulator
	DC2	Infrastructure master
	DC3	Read-only domain controller (RODC)
eu.fabrikam.com	DC4	PDC emulator
	DC5	Infrastructure master
	DC6	Read-only domain controller (RODC)

You are implementing Microsoft Defender for Identity sensors.

You need to install the sensors on the minimum number of domain controllers. The solution must ensure that Defender for Identity will detect all the security risks in both the domains.

What should you identify? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Domain controllers that require the sensors:

DC1 and DC4 only

DC2 and DC5 only

DC1, DC2, DC4, and DC5 only

All the domain controllers in the forest

Authentication information that must be provided during the sensor installation:

An AD DS group managed service account (gMSA)

A cloud-only user from Azure Active Directory (Azure AD)

The access key generated by the Microsoft Defender for Identity portal

Answer:

Domain controllers that require the sensors:

DC1 and DC4 only

DC2 and DC5 only

DC1, DC2, DC4, and DC5 only

All the domain controllers in the forest

Authentication information that must be provided during the sensor installation:

An AD DS group managed service account (gMSA)

A cloud-only user from Azure Active Directory (Azure AD)

The access key generated by the Microsoft Defender for Identity portal

Explanation:

Domain controllers that require the sensors:

Microsoft

DC1 and DC4 only

DC2 and DC5 only

DC1, DC2, DC4, and DC5 only

All the domain controllers in the forest

Authentication information that must be provided during the sensor installation:

An AD DS group managed service account (gMSA)

A cloud-only user from Azure Active Directory (Azure AD)

The access key generated by the Microsoft Defender for Identity portal

Reference:
<https://docs.microsoft.com/en-us/defender-for-identity/technical-faq#deployment>
<https://docs.microsoft.com/en-us/defender-for-identity/install-step4>

Valid AZ-801 Dumps shared by EduDump.com for Helping Passing AZ-801 Exam! EduDump.com now offer the **newest AZ-801 exam dumps**, the EduDump.com AZ-801 exam **questions have been updated** and **answers have been corrected** get the **newest** EduDump.com AZ-801 dumps with Test Engine here: <https://www.edudump.com/exams/Microsoft/AZ-801/premium/> (297 Q&As Dumps, **35%OFF** Special Discount Code: **freecram**)

NEW QUESTION: 17

You have an on-premises, two-node, hyperconverged Windows Server Failover Cluster (WSFC) named Cluster1. You have an Azure subscription. You need to configure a cloud witness for Cluster1. Which type of Azure Storage should you use?

- A. file
- B. blob
- C. table
- D. queue

Answer: (SHOW ANSWER)

NEW QUESTION: 18

You have two servers that have the Web Server (IIS) server role installed. The servers are configured as shown in the following table.

Name	Operating system
Server1	Windows Server 2016
Server2	Windows Server 2022

Both servers are configured to enable website deployment by using the Web Deployment Tool. Server1 hosts a website named Site1 that has Web Deploy Publishing configured. You plan to migrate Site1 to Server2. You need to perform a pull synchronization of Site1 by using the Web Deployment Agent Service. How should you complete the command? To answer, select the appropriate options in the answer area. NOTE: Each correct selection is worth one point.

msdeploy -verb:sync -source:	-dest:
apphostconfig="Site1"	apphostconfig="Site1"
apphostconfig="Site1",computername=Server1	apphostconfig="Site1",computername=Server1
apphostconfig="Site1",computername=Server2	apphostconfig="Site1",computername=Server2
package=c:\site1.zip	package=c:\site1.zip

Answer:

msdeploy -verb:sync -source:	-dest:
apphostconfig="Site1"	apphostconfig="Site1"
apphostconfig="Site1",computername=Server1	apphostconfig="Site1",computername=Server1
apphostconfig="Site1",computername=Server2	apphostconfig="Site1",computername=Server2
package=c:\site1.zip	package=c:\site1.zip

Explanation:

msdeploy -verb:sync -source:	-dest:
apphostconfig="Site1"	apphostconfig="Site1"
apphostconfig="Site1",computername=Server1	apphostconfig="Site1",computername=Server1
apphostconfig="Site1",computername=Server2	apphostconfig="Site1",computername=Server2
package=c:\site1.zip	package=c:\site1.zip

Reference:

<https://docs.microsoft.com/en-us/ii s/p ubl ish/using-web-deploy/synchronize-iis>

NEW QUESTION: 19

You have an on-premises Active Directory Domain Services (AD DS) domain that syncs with an Azure Active Directory (Azure AD) tenant by using password hash synchronization.

You have a Microsoft 365 subscription.

All devices are hybrid Azure AD-joined.

Users report that they must enter their password manually when accessing Microsoft 365 applications.

You need to reduce the number of times the users are prompted for their password when they access Microsoft 365 and Azure services.

What should you do?

A. In Azure AD, configure a Conditional Access policy for the Microsoft Office 365 applications.

B. In the DNS zone of the AD DS domain, create an autodiscover record.

C. From Azure AD Connect, enable single sign-on (SSO).

D. From Azure AD Connect, configure pass-through authentication.

Answer: (SHOW ANSWER)

Reference:

<https://docs.microsoft.com/en-us/azure/active-directory/hybrid/how-to-connect-sso-quick-start>

NEW QUESTION: 20

You have a server named Server1 that runs Windows Server and contains two volumes named C and D.

You connect a disk to Server 1 that is encrypted by using BitLocker and contains a volume named E.

You need to ensure that after a restart, the data on volume E can be accessed without providing a password or a recovery key.

Which three actions should you perform on Server1 in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Actions

- Encrypt volume C.
- Install the BitLocker Drive Encryption Administration Utilities feature.
- Encrypt volume D.
- Install the BitLocker Drive Encryption feature.
- Install the BitLocker Network Unlock feature.
- Turn on auto-unlock.

Answer Area

Microsoft

Answer:

Actions

- Encrypt volume C.
- Install the BitLocker Drive Encryption Administration Utilities feature.
- Encrypt volume D.
- Install the BitLocker Drive Encryption feature.
- Install the BitLocker Network Unlock feature.
- Turn on auto-unlock.

Answer Area

- Install the BitLocker Drive Encryption feature.
- Install the BitLocker Network Unlock feature.
- Turn on auto-unlock.

Explanation:

Actions

- Encrypt volume C.
- Install the BitLocker Drive Encryption Administration Utilities feature.
- Encrypt volume D.

Answer Area

- 1 Install the BitLocker Drive Encryption feature.
- 2 Install the BitLocker Network Unlock feature.
- 3 Turn on auto-unlock.

NEW QUESTION: 21

You are planning the deployment of Microsoft Sentinel.

Which type of Microsoft Sentinel data connector should you use to meet the security requirements?

- A. Threat Intelligence - TAXII
- B. Azure Active Directory
- C. Microsoft Defender for Cloud
- D. Microsoft Defender for Identity

Answer: (SHOW ANSWER)

Reference:

<https://docs.microsoft.com/en-us/defender-for-identity/cas-isp-legacy-protocols>

NEW QUESTION: 22

You are planning the europe.fabrikam.com migration to support the on-premises migration plan-Where should you install the Password Export Server (PES) service, where should you generate the encryption key?
To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

Answer Area

Install the PES service on:

Generate the encryption key on:

Microsoft

Answer:

Answer Area

Install the PES service on:

Generate the encryption key on:

Microsoft

Explanation:

Answer Area

Install the PES service on:

Generate the encryption key on:

Microsoft

NEW QUESTION: 23

Your on-premises network contains an Active Directory Domain Services (AD DS) domain. The domain contains a scale-out file server (SOFS) cluster named Cluster1. Cluster1 contains four nodes that run Windows Server 2022.
You need to upgrade the nodes to Windows Server 2025. The solution must minimize the downtime of Cluster1.
Which three actions should you perform on each node in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Actions

- Update the functional level of Cluster1.
- Enable Cluster-Aware Updating (CAU).
- Drain and evict the node.
- Install Windows Server 2025 and Failover Clustering.
- Add the node to Cluster1.

Answer Area



Answer:

Actions

- Update the functional level of Cluster1.
- Enable Cluster-Aware Updating (CAU).
- Drain and evict the node.
- Install Windows Server 2025 and Failover Clustering.
- Add the node to Cluster1.

Answer Area

- Drain and evict the node.
- Install Windows Server 2025 and Failover Clustering.
- Add the node to Cluster1.

Explanation:

Actions

- Update the functional level of Cluster1.
- Enable Cluster-Aware Updating (CAU).

Answer Area

- Drain and evict the node.
- Install Windows Server 2025 and Failover Clustering.
- Add the node to Cluster1.

NEW QUESTION: 24

You have a server that runs Windows Server.
You need to enable the following security features:
* Core isolation
* Force randomization for images {Mandatory ASLR}

Which Windows Security tile should you use to enable each feature? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

Answer Area

Core isolation:

App & browser control
Device security
Firewall & network protection
Virus & threat protection

Force randomization for images (Mandatory ASLR):

App and browser control
Device security
Firewall & network protection
Virus & threat protection

Answer:

Answer Area

Core isolation:

App & browser control
Device security
Firewall & network protection
Virus & threat protection

Force randomization for images (Mandatory ASLR):

App and browser control
Device security
Firewall & network protection
Virus & threat protection

Explanation:

Answer Area

Core isolation:

Device security

Force randomization for images (Mandatory ASLR):

App & browser control

NEW QUESTION: 25

Your network contains an Active Directory Domain Services (AD DS) forest. The forest contains a user named User1. You deploy a read-only domain controller (RODC named RODC1. You need to ensure that User1 is a local administrator on RODC1. The solution must use the principle of least privilege. What should you use?

- A. dsamain.exe
- B. net user
- C. ntdsutil.exe
- D. Computer Management

Answer: (SHOW ANSWER)

NEW QUESTION: 26

Your network contains an Active Directory Domain Services (AD DS) domain. The domain contains two Windows Server Failover Cluster (WSFQ instances named Cluster1 and Ckister2. Cluster! hosts Hyper-V virtual machines. Cluster2 does NOT have any high availability roles configured.

You need to create a Storage Spaces Direct cluster in Cluster2 that will store the virtual machine hard disk files for Cluster1.

Which role should you configure for Cluster2? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

- A. Hyper-V Replica Broker
- B. SCSI Target Server
- C. File Server
- D. Virtual Machine

Answer: (SHOW ANSWER)

NEW QUESTION: 27

You have a Storage Spaces Direct configuration that has persistent memory and contains the data volumes shown in the following table.

Name	File system
Volume1	NTFS
Volume2	ReFS

You plan to add data volumes to Storage Spaces Direct as shown in the following table.

Name	File system
Volume3	NTFS
Volume4	ReFS

On which volumes can you use direct access (DAX)?

- A. Volume3 only
- B. Volume4 only
- C. Volume1 and Volume3 only
- D. Volume2 and Volume4 only
- E. Volume3 and Volume4 only

Answer: (SHOW ANSWER)

DAX can only be used on one volume and the volume has to be NTFS. You could configure DAX on Volume1 (although that would require reformatting the volume) or Volume3. However, 'Volume1 only' isn't an answer option so Volume3 is the correct answer.

'Volume1 and Volume3' is incorrect because of the single volume limitation.

Reference:

NEW QUESTION: 28

Your network contains an Active Directory Domain Services (AD DS) domain. The domain contains three servers named Server1, Server2, and Server3 that run Windows Server. All the servers are on the same network and have network connectivity.

On Server1, Windows Defender Firewall has a connection security rule that has the following settings:

- * Rule Type: Server-to-server
- * Endpoint 1: Any IP address
- * Endpoint 2: Any IP address
- * Requirements: Require authentication for inbound connections and request authentication for outbound connections
- * Authentication Method: Computer (Kerberos V5)
- * Profile: Domain, Private, Public
- * Name: Rule1

For each of the following statements, select Yes if the statement is true. Otherwise, select No. NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
When Server1 establishes a network connection with Server2, the connection is encrypted.	☐	☐
Server2 can establish a network connection with Server3.	☐	☐
When Server3 establishes a network connection with Server1, the connection is encrypted.	☐	☐

Answer:

Answer Area

Statements


When Server1 establishes a network connection with Server2, the connection is encrypted.

Server2 can establish a network connection with Server3.

When Server3 establishes a network connection with Server1, the connection is encrypted.

Yes

No



○

12

0

○

10

Explanation:

Answer Area

Statements

When Server1 establishes a network connection with Server2, the connection is encrypted.

Server2 can establish a network connection with Server3.

When Server3 establishes a network connection with Server1, the connection is encrypted.

Yes

No

C

C

C



NEW QUESTION: 29

You deploy Azure Migrate to an on-premises network.

You have an on-premises physical server named Server1 that runs Windows Server and has the following configuration.

Operating system disk 600 GB

Data disic 3 TB

NIC Teaming: Enabled

Mobility service: installed

Windows Firewall: Enabled

Microsoft Defender Antivirus: Enabled

You need to ensure that you can use Azure Migrate to migrate Server1.

Solution: You disable Windows Firewall on Server1.

Does this meet the goal?

A. No

B. Yes

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 30

You have two Azure virtual networks named Vnet1 and Vnet2.
You have a Windows 10 device named Client1 that connects to Vnet1 by using a Point-to-Site (P2S) IKEv2 VPN.
You implement virtual network peering between Vnet1 and Vnet2. Vnet1 allows gateway transit Vnet2 can use the remote gateway.
You discover that Client1 cannot communicate with Vnet2.
You need to ensure that Client1 can communicate with Vnet2.
Solution: You enable BGP on the gateway of Vnet1.
Does this meet the goal?

- A. No
- B. Yes

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 31

Your on-premises network contains an Active Directory Domain Services (AD DS) domain.
The domain contains four servers named Server1, Server2, Server3, and Server4 that run Windows Server.
You configure the connection security rules shown in the following table.

Server	Rule authentication requirement	Authentication method
Server1	Request authentication for inbound and outbound connections	Default
Server2	Request authentication for inbound connections and require authentication for outbound connections	Default
Server3	Require authentication for inbound and outbound connections	Default

Server4 does NOT have any connection security rules applied.
With which servers can Server1 and Server2 establish communication after the connection security rules are applied? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

Answer Area

From Server1, communication can be established with:

Server2 only
Server3 only
Server2 and Server3 only
Server2, Server3, and Server4

From Server2, communication can be established with:

No other server
Server3 only
Server1 and Server3 only
Server1, Server3, and Server4



Answer:
Answer Area

From Server1, communication can be established with:

Server2 only
Server3 only
Server2 and Server3 only
Server2, Server3, and Server4

From Server2, communication can be established with:

No other server
Server3 only
Server1 and Server3 only
Server1, Server3, and Server4



Explanation:

Answer Area

From Server1, communication can be established with: Server2 only

From Server2, communication can be established with: Server3 only



Valid AZ-801 Dumps shared by EduDump.com for Helping Passing AZ-801 Exam! EduDump.com now offer the **newest AZ-801 exam dumps**, the EduDump.com AZ-801 exam **questions have been updated** and **answers have been corrected** get the **newest** EduDump.com AZ-801 dumps with Test Engine here: <https://www.edudump.com/exams/Microsoft/AZ-801/premium/> (297 Q&As Dumps, **35%OFF** Special Discount Code: **freecram**)

You have an Azure subscription that has Microsoft Defender for Cloud enabled.
You have 50 Azure virtual machines that run Windows Server.
You need to ensure that any security exploits detected on the virtual machines are forwarded to Defender for Cloud.
Which extension should you enable on the virtual machines?

- A. Vulnerability assessment for machines
- B. Microsoft Dependency agent
- C. Log Analytics agent for Azure VMs
- D. Guest Configuration agent

Answer: (SHOW ANSWER)

Reference:
<https://docs.microsoft.com/en-us/azure/defender-for-cloud/deploy-vulnerability-assessment-vm>

NEW QUESTION: 33

You have an Azure virtual machine named VM1 that runs Windows Server.
The operating system on VM1 fails to start due to a disk error.
You need to resolve the error.
Which four commands should you run in sequence in Azure Cloud Shell? To answer, move the appropriate commands from the list of commands to the answer area and arrange them in the correct order.

Actions

az extension add

az vm disk

az vm repair create

az vm repair run

az vm repair restore

>

<

Answer Area

↑

↓

Answer:

Actions

az extension add

az vm disk

az vm repair create

az vm repair run

az vm repair restore

>

<

Answer Area

az vm disk

az vm repair create

az vm repair run

az vm repair restore

↑

↓

Explanation:

Actions

az extension add

>

<

Answer Area

1

az vm disk

2

az vm repair create

3

az vm repair run

4

az vm repair restore

⬆

⬇


NEW QUESTION: 34

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have a failover cluster named Cluster1 that hosts an application named App1.

The General tab in App1 Properties is shown in the General exhibit. (Click the General tab.)

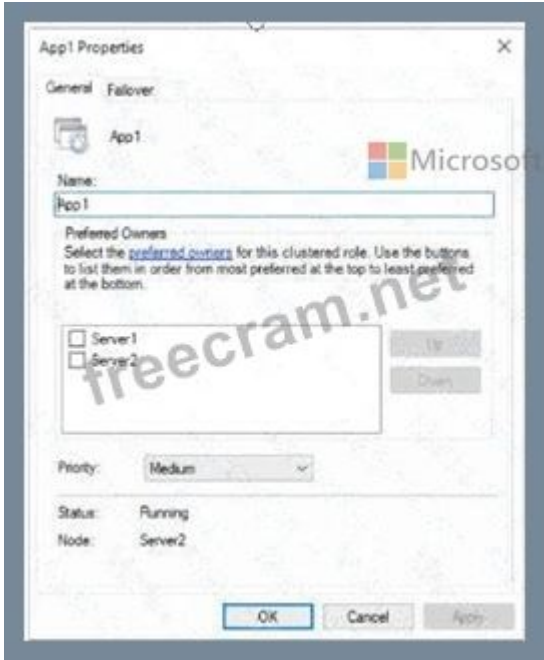

The Failover tab in App1 Properties is shown in the Failover exhibit. (Click the Failover tab.)

General Failover

Failover

Specify the number of times the Cluster service will attempt to restart or fail over the clustered role in the specified period.

If the clustered role fails more than the maximum in the specified period, it will be left in the failed state.

Maximum failures in the specified period: 0

Period (hours): 5

Failback

Specify whether the clustered role will automatically fail back to the most preferred owner (which is set on the General tab).

☐ Prevent failback

☒ Allow failback

☒ Immediately

☐ Failback between: 0 and 0 hours

OK Cancel Apply

Server1 shuts down unexpectedly.

You need to ensure that when you start Server1, App1 continues to run on Server2.

Solution: From the General settings, you move Server2 up.

Does this meet the goal?

A. Yes

B. No

Answer: (SHOW ANSWER)

Server1 and Server2 are both unticked so the order they are listed in has no effect on whether the cluster will fail back.

NEW QUESTION: 35

Your network contains an Active Directory Domain Services (AD DS) domain that has a Windows Server

2012 R2 forest and domain functional level. The domain contains the domain controllers shown in the following table.

Name	Operating system
DC1	Windows Server 2012 R2
DC2	Windows Server 2016
DC3	Windows Server 2016

You need to ensure that you can deploy a new domain controller that runs Windows Server 2025. The solution must minimize administrative effort.

Which two actions should you perform? Each correct answer presents part of the solution.

NOTE: Each correct selection is worth one point.

A. Remove DC 1.

B. Remove DC2 and DC3.

C. Raise the forest and domain functional level to Windows Server 2016.

D. Upgrade DC1, DC2, and CO to Windows Server 2025.

E. Raise the forest and domain functional level to Windows Server 2025.

Answer: (SHOW ANSWER)

NEW QUESTION: 36

Your network contains an Active Directory Domain Services (AD DS) domain. The domain contains a server named Server1 that runs Windows Server.

```
ComputerName      : SERVER1
MountPoint        : C:
EncryptionMethod   : None
AutoUnlockEnabled  :
AutoUnlockKeyStored :
MetadataVersion   : 0
VolumeStatus      : FullyDecrypted
ProtectionStatus   : Off
LockStatus         : Unlocked
EncryptionPercentage : 0
WipePercentage     : 0
VolumeType         : OperatingSystem
CapacityGB         : 126.5107
KeyProtector       : {}

ComputerName      : SERVER1
MountPoint        : D:
EncryptionMethod   : Aes128
AutoUnlockEnabled  : False
AutoUnlockKeyStored :
MetadataVersion   : 2
VolumeStatus      : FullyEncrypted
ProtectionStatus   : On
LockStatus         : Unlocked
EncryptionPercentage : 100
WipePercentage     : 0
VolumeType         : Data
CapacityGB         : 126.5107
KeyProtector       : {Password, RecoveryPassword}
```

Answer Area

Microsoft

-MountPoint D: -ADAccountGroupProtector CONTOSO\Server15

Add-BitLockerKeyProtector

Clear-BitLockerAutoUnlock

Enable-BitLockerAutoUnlock

-Service

-TPMAndPinAndStartupKeyProtector

-TPMAndPinProtector

Answer:

Answer Area

Microsoft

-MountPoint D: -ADAccountGroupProtector CONTOSO\Server15

Add-BitLockerKeyProtector

Clear-BitLockerAutoUnlock

Enable-BitLockerAutoUnlock

-Service

-TPMAndPinAndStartupKeyProtector

-TPMAndPinProtector

Explanation:

Answer Area

Microsoft

Add-BitLockerKeyProtector

-MountPoint D: -ADAccount GroupProtector CONTOSO\Server1\$ -Service

NEW QUESTION: 37

Your network contains an Active Directory Domain Services (AD DS) domain named contoso.com. The domain contains the organizational units (OUs) shown in the following table.

Name	Contents
Domain Controllers	All the domain controllers in the domain
Domain Servers	All the servers that run Windows Server in the domain
Domain Client Computers	All the client computers that run Windows 10 in the domain
Domain Users	All the users in the domain

In the domain, you create the Group Policy Objects (GPOs) shown in the following table.

Name	IPsec setting
GPO1	Require authentication by using Kerberos V5 for inbound connections
GPO2	Request authentication by using Kerberos V5 for inbound connections
GPO3	Require authentication by using X.509 certificates for inbound connections
GPO4	Request authentication by using X.509 certificates for inbound connections

You need to implement IPsec authentication to ensure that only authenticated computer accounts can connect to the members in the domain. The solution must minimize administrative effort. Which GPOs should you apply to the Domain Controllers OU and the Domain Servers OU? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

 Microsoft

Domain Controllers:

GPO1
GPO2
GPO3
GPO4

Domain Servers:

GPO1
GPO2
GPO3
GPO4

Answer:

 Microsoft

Domain Controllers:

GPO1
GPO2
GPO3
GPO4

Domain Servers:

GPO1
GPO2
GPO3
GPO4

Explanation:

Domain Controllers:

GPO1

GPO2

GPO3

GPO4

Domain Servers:

GPO1

GPO2

GPO3

GPO4



Reference:
<https://docs.microsoft.com/en-us/windows/security/threat-protection/windows-firewall/configure-authentication-methods>

NEW QUESTION: 38

You have an on-premises file server named Server1 that runs Windows Server.
You have an Azure subscription.
Server1 contains a file share named Share1.
You need to migrate Share1 to an Azure virtual machine.
What should you use?

- A. Windows Admin Center
- B. Azure Migrate
- C. Server Manager
- D. Storage Replica

Answer: (SHOW ANSWER)

NEW QUESTION: 39

You have the on-premises servers shown in the following table.

Name	Operating system
Server1	Windows Server 2025
Server2	Windows Server 2022
Server3	Windows Server 2019
Server4	Windows Server 2016

You are evaluating OSConfig and security baselines.
Which cmdlet should you use to deploy OSConfig. and which servers support OSConfig? To answer, select the appropriate options in the answer area.
NOTE: Each correct selection is worth one point.

Answer Area

Cmdlet:

- Add-WindowsFeature
- Enable-WindowsOptionalFeature
- Install-Module
- Install-Package

Servers:

- Server1 only
- Server1 and Server2 only
- Server1, Server2, and server3 only
- Server1, Server2, Server3, and Server4

Answer:

Answer Area

Cmdlet:

- Add-WindowsFeature
- Enable-WindowsOptionalFeature
- Install-Module
- Install-Package

Servers:

- Server1 only
- Server1 and Server2 only
- Server1, Server2, and server3 only
- Server1, Server2, Server3, and Server4

Explanation:

Answer Area

Cmdlet: Install-Module

Servers: Server1 and Server2 only

NEW QUESTION: 40

You have an on-premises server named Server1 that runs Windows Server, has the Web Server (IIS) server role installed, and hosts an ASP.NET-based web app named App1.

You have an Azure subscription that contains an Azure App Service app and an Azure container registry named ACR1.

You plan to migrate App1 to an App Service container by using Azure Migrate. The container image for App1 will be stored in ACR1.

You need to ensure that the App Containerization tool can store the container for App1 in ACR1. The solution must follow the principle of least privilege.

Which credential should the App Containerization tool use?

A. a managed identity

B. the admin user account of ACR1

- C. a Microsoft Entra service principal
- D. a Microsoft Entra user

Answer: (SHOW ANSWER)

NEW QUESTION: 41

Your network contains an Active Directory Domain Services (AD DS) domain that contains the servers shown in the following table.

Name	Operating system	Installed
Server1	Windows Server 2019	DHCP Server role Windows Server Migration Tools
Server2	Windows Server 2025	Windows Server Migration Tools

Server1 and Server2 are authorized as DHCP servers in the domain. You need to migrate the DHCP Server role from Server1 to Server2. Which five actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Actions

From Server1, run the Stop-Service cmdlet.

Copy the Dhcp.mdb file to Server2.

From Server1, run the Export-SmigServerSetting cmdlet.

Copy the Svmig.mig file to Server2.

From Server2, run the Add-WindowsFeature cmdlet.

From Server2, run the Import-SmigServerSetting cmdlet.

From Server2, run the start-Service cmdlet.

Answer Area

Microsoft

Answer:

Actions

- From Server1, run the Stop-Service cmdlet.
- Copy the Dhcp.mdb file to Server2.
- From Server1, run the Export-SmigServerSetting cmdlet.
- Copy the Svmig.mig file to Server2.
- From Server2, run the Add-WindowsFeature cmdlet.
- From Server2, run the Import-SmigServerSetting cmdlet.
- From Server2, run the start-Service cmdlet.

Answer Area

- From Server1, run the Export-SmigServerSetting cmdlet.
- Copy the Svmig.mig file to Server2.
- From Server2, run the Add-WindowsFeature cmdlet.
- From Server2, run the Import-SmigServerSetting cmdlet.
- From Server2, run the start-Service cmdlet.

Explanation:

Actions

- From Server1, run the Stop-Service cmdlet.
- Copy the Dhcp.mdb file to Server2.

Answer Area

- From Server1, run the Export-SmigServerSetting cmdlet.
- Copy the Svmig.mig file to Server2.
- From Server2, run the Add-WindowsFeature cmdlet.
- From Server2, run the Import-SmigServerSetting cmdlet.
- From Server2, run the start-Service cmdlet.

NEW QUESTION: 42

You need to implement a security policy solution to authorize the applications. The solution must meet the security requirements. Which service should you use to enforce the security policy, and what should you use to manage the policy settings? To answer, select the appropriate options in the answer area. NOTE: Each correct selection is worth one point.

Enforce the security policy:	<div>Microsoft Defender Application Control</div> <div>Microsoft Defender Application Guard</div> <div>Microsoft Defender Credential Guard</div> <div>Microsoft Defender for Endpoint</div>
Manage the policy settings:	<div>Configuration profiles in Microsoft Intune</div> <div>Compliance policies in Microsoft Intune</div> <div>Group Policy Objects (GPOs)</div>

Answer:

Enforce the security policy:	<div>Microsoft Defender Application Control</div> <div>Microsoft Defender Application Guard</div> <div>Microsoft Defender Credential Guard</div> <div>Microsoft Defender for Endpoint</div>
Manage the policy settings:	<div>Configuration profiles in Microsoft Intune</div> <div>Compliance policies in Microsoft Intune</div> <div>Group Policy Objects (GPOs)</div>

Explanation:

Enforce the security policy:

- Microsoft Defender Application Control
- Microsoft Defender Application Guard
- Microsoft Defender Credential Guard
- Microsoft Defender for Endpoint

Manage the policy settings:



- Configuration profiles in Microsoft Intune
- Compliance policies in Microsoft Intune
- Group Policy Objects (GPOs)

Reference:

<https://docs.microsoft.com/en-us/windows/security/threat-protection/windows-defender-application-control/wdac-and-applocker-overview>

NEW QUESTION: 43

You have a server named Server1 that runs Windows Server.

For Server1, you enable the default App Control for Business policies in audit mode.

You need to ensure that specific third-party applications installed on Server1 are allowed to run by using App Control for Business.

Which four actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Actions

From Event Viewer, generate an EVTX file.

Run the Enable-OSConfigDriftControl cmdlet.

Run the New-CIPolicy and New-CIPolicyRule cmdlets.

From the Windows Defender App Control Policy Wizard, generate an XML file.

Run the Set-CIPolicyVersion and Set-PCIPolicyIdInfo cmdlets.

Run the Set-OSConfigDesiredConfiguration cmdlet.

Answer Area



Answer:

Actions

From Event Viewer, generate an EVTX file.

Run the Enable-OSConfigDriftControl cmdlet.

Run the New-CIPolicy and New-CIPolicyRule cmdlets.

From the Windows Defender App Control Policy Wizard, generate an XML file.

Run the Set-CIPolicyVersion and Set-PCIPolicyIdInfo cmdlets.

Run the Set-OSConfigDesiredConfiguration cmdlet.

Answer Area

Run the New-CIPolicy and New-CIPolicyRule cmdlets.

From the Windows Defender App Control Policy Wizard, generate an XML file.

Run the Set-CIPolicyVersion and Set-PCIPolicyIdInfo cmdlets.

Run the Set-OSConfigDesiredConfiguration cmdlet.

Explanation:

Actions

From Event Viewer, generate an EVTX file.

Run the Enable-OSConfigDriftControl cmdlet.

Answer Area

1 Run the New-CIPolicy and New-CIPolicyRule cmdlets.

2 From the Windows Defender App Control Policy Wizard, generate an XML file.

3 Run the Set-CIPolicyVersion and Set-PCIPolicyIdInfo cmdlets.

4 Run the Set-OSConfigDesiredConfiguration cmdlet.

NEW QUESTION: 44

Your network contains an Active Directory Domain Services (AD DS) domain. The domain contains an organizational unit (OU) named OU1 and a user named User1. You plan to deploy a Hyper V failover cluster named Cluster1. You need to prestage the account for Cluster1 and ensure that User1 can deploy Cluster1. The solution must follow the principle of least privilege.

Which action should you perform, and which permissions should you grant to User1 for Cluster1? To answer, select the appropriate options in the answer area NOTE: Each correct selection is worth one point.

Answer Area

Action:

Permissions:

Answer:

Answer Area

Action:

Permissions:

Explanation:

Answer Area

Action:

Permissions:

NEW QUESTION: 45

You have two servers named Host1 and Host2 that run Windows Server and have the Hyper-V server role installed. Host2 is configured as a replica server.

Host1 contains a virtual machine named VM1.

You plan to use Hyper-V Replica to replicate VM1 to Host2.

You need to ensure that you can restore a replica of VM1 to a specific state from the past eight hours.

What should you do?

- A. From the Hyper-V Settings of Host2, configure NUMA spanning.
- B. From the Enable Replication wizard, modify the replication frequency.
- C. From the Properties of VM1, enable automatic checkpoints.
- D. From the Enable Replication wizard, configure recovery points.

Answer: (SHOW ANSWER)

NEW QUESTION: 46

You deploy Azure Migrate to an on-premises network.

You have an on-premises physical server named Server1 that runs Windows Server and has the following configuration.

- * Operating system disk 600 GB
- * Data disc 3 TB
- * NIC Teaming: Enabled
- * Mobility service: installed
- * Windows Firewall: Enabled
- * Microsoft Defender Antivirus: Enabled

You need to ensure that you can use Azure Migrate to migrate Server1.

Solution: You shrink the data disk on Server1.

Does this meet the goal?


- A. Yes
- B. No

Answer: (SHOW ANSWER)

Valid AZ-801 Dumps shared by EduDump.com for Helping Passing AZ-801 Exam! EduDump.com now offer the **newest AZ-801 exam dumps**, the EduDump.com AZ-801 exam **questions have been updated** and **answers have been corrected** get the **newest** EduDump.com AZ-801 dumps with Test Engine here: <https://www.edudump.com/exams/Microsoft/AZ-801/premium/> (297 Q&As Dumps, **35%OFF** Special Discount Code: **freecram**)

NEW QUESTION: 47

The servers run Windows Server and have the network configurations shown in the following table.

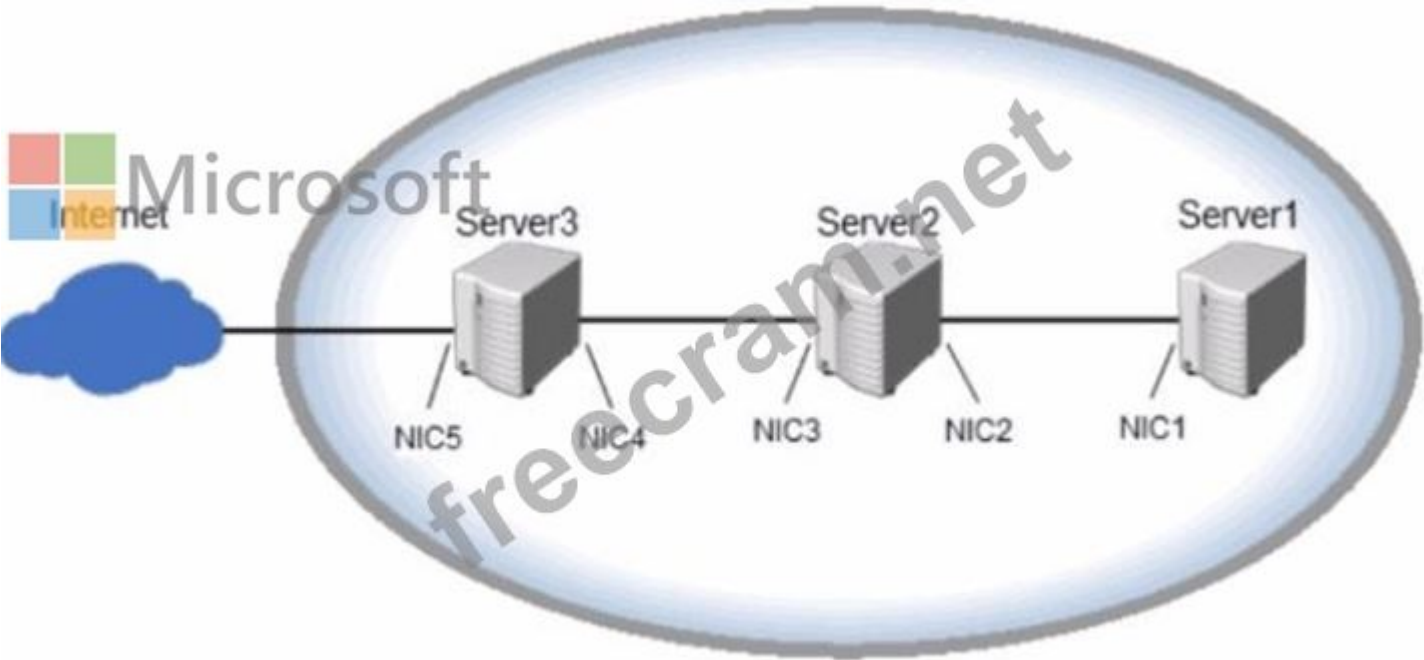

Server1	NIC1	IP address: 172.16.0.1 Mask: 255.255.255.0 Gateway: 172.16.0.100
Server2	NIC2	IP address: 172.16.0.100 Mask: 255.255.255.0
	NIC3	IP address: 192.168.15.1 Mask: 255.255.255.0
Server3	NIC4	IP address: 192.168.15.100 Mask: 255.255.255.0
	NIC5	IP address: 131.107.0.1 Mask: 255.255.255.0 Gateway: 131.107.0.100

Server3 is configured as a NAT gateway. All the servers allow ICMP requests.
Use the drop-down menus to select the answer choice that completes each statement based on the information presented in the graphic.
NOTE: Each correct selection is worth one point.

Answer Area

Server1 can ping [answer choice] successfully.

NIC1 only

NIC1 and NIC2 only

NIC1, NIC2, and NIC3 only

NIC1, NIC2, NIC3, and NIC4 only

NIC1, NIC2, NIC3, NIC4, and NIC5

Server2 can ping [answer choice] successfully.

NIC2 and NIC3 only

NIC1, NIC2, and NIC3 only

NIC1, NIC2, NIC3 and NIC2 only

NIC1, NIC2, NIC3, NIC4, and NIC5

Answer:

Answer Area

Server1 can ping [answer choice] successfully.

- NIC1 only
- NIC1 and NIC2 only
- NIC1, NIC2, and NIC3 only
- NIC1, NIC2, NIC3, and NIC4 only
- NIC1, NIC2, NIC3, NIC4, and NIC5

Server2 can ping [answer choice] successfully.

- NIC2 and NIC3 only
- NIC1, NIC2, and NIC3 only
- NIC1, NIC2, NIC3 and NIC2 only
- NIC1, NIC2, NIC3, NIC4, and NIC5

Microsoft

Explanation:

Answer Area

Server1 can ping [answer choice] successfully. NIC1 and NIC2 only

Server2 can ping [answer choice] successfully. NIC1, NIC2, NIC3, and NIC4 only

Microsoft

NEW QUESTION: 48

You have a failover cluster named Cluster1 that contains two Windows Server nodes named Server1 and Server2. Cluster1 hosts highly available Hyper-V virtual machines. You have a member server named Server3 that runs Windows Server. You need to implement Cluster-Aware Updating (CUA) on Cluster1 and configure Server3 to manage CUA. The solution must minimize administrative effort. What should you install on Server3?

- A. the Host Guardian Service server role
- B. Windows Admin Center
- C. the Windows Server Update Services server role
- D. the Failover Cluster Automation Server feature

Answer: (SHOW ANSWER)

NEW QUESTION: 49

You have an Azure subscription.

You plan to deploy a virtual machine named VM1 to the East US Azure region and use Azure Site Recovery between availability zones.

You need to configure the disks on VM1 and the virtual network. The solution must meet the following requirements:

- * Maximize the availability of VM1.
- * Maintain the private IP address of VM1 during failover and failback operations.

What should you configure? To answer, select the appropriate options in the answer area. NOTE: Each correct selection is worth one point .

Answer Area

Disk configuration:

Zone-redundant Storage (ZRS) Premium SSD

Locally-redundant storage (LRS) Premium SSD

Zone-redundant Storage (ZRS) Premium SSD

Zone-redundant Storage (ZRS) SSD

Virtual network configuration:

One virtual network and two subnets

One virtual network and one subnet

One virtual network and two subnets

Two virtual networks and two subnets

Answer:

Answer Area

Microsoft

Disk configuration:

Zone-redundant Storage (ZRS) Premium SSD

Locally-redundant storage (LRS) Premium SSD

Zone-redundant Storage (ZRS) Premium SSD

Zone-redundant Storage (ZRS) SSD

Virtual network configuration:

One virtual network and two subnets

One virtual network and one subnet

One virtual network and two subnets

Two virtual networks and two subnets

Explanation:

Answer Area

Disk configuration:

Zone-redundant Storage (ZRS) Premium SSD

Virtual network configuration:

One virtual network and two subnets

NEW QUESTION: 50

Your network contains an Active Directory Domain Services (AD DS) domain. The domain contains the servers shown in the following table.

Name	Operating system	Installed
Server1	Windows Server	IIS web app named App1
Server2	Windows Server	Docker Enterprise Edition
Server3	Windows Server	Windows Admin Center

You need to migrate App1 to a Docker image on Server2.
Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the coned order.

Actions

From Server2, install the Web Server (IIS) role.

From Server2, run the Add-AppPackage cmdlet.

From Server1, run the Move-AppPackage cmdlet.

From Server1, install the Microsoft Web Deployment Tool.

From Server1, export an application package.

From Windows Admin Center, install the Containers extension and create a container image.

Answer Area

Answer:

Actions

From Server2, install the Web Server (IIS) role.

From Server2, run the Add-AppPackage cmdlet.

From Server1, run the Move-AppPackage cmdlet.

From Server1, install the Microsoft Web Deployment Tool.

From Server1, export an application package.

From Windows Admin Center, install the Containers extension and create a container image.

Answer Area

From Server1, install the Microsoft Web Deployment Tool.

From Server1, export an application package.

From Windows Admin Center, install the Containers extension and create a container image.

Explanation:

Actions

From Server2, install the Web Server (IIS) role.

From Server2, run the Add-AppPackage cmdlet.

From Server1, run the Move-AppPackage cmdlet.

Answer Area

1 From Server1, install the Microsoft Web Deployment Tool.

2 From Server1, export an application package.

3 From Windows Admin Center, install the Containers extension and create a container image.

NEW QUESTION: 51

Your on-premises network contains an Active Directory Domain Services (AD DS) forest named contoso.com. The forest contains the domains shown in the following table.

Name	Contains organizational unit (OU)
contoso.com	OU1, OU2
east.contoso.com	OU3

You create a user named User1 that has the following attributes:

- distinguishedName: CN=User1,OU=OU1,DC=contoso,DC=com
- objectGUID: ff06ad4b-2e43-4a7d-b34c-8ea53f909422
- objectSID: S-1-5-21-913740354-169946239-1665692169-4612
- whenCreated: 7/30/2024 10:16:50 AM

You plan to move User1 to OU3 by using the Active Directory Migration Tool (ADMT). Which attributes will change if User1 moves to OU3?

- A. objectsioonly
- B. objectGUID, and objectSID Only
- C. distinguishedHame, objectSID, and whenCreated Only
- D. distinguishedName only

Answer: (SHOW ANSWER)

NEW QUESTION: 52

You need to configure BitLocker on Server4.

On which volumes can you turn on BitLocker, and on which volumes can you turn on auto-unlock? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

BitLocker:

D only

C and D only

D, E, and F only

C, D, E, and F

Auto-unlock:

D only

C and D only

D, E, and F only

C, D, E, and F

Answer:

BitLocker:

D only

C and D only

D, E, and F only

C, D, E, and F

Auto-unlock:

 Microsoft

D only

C and D only

D, E, and F only

C, D, E, and F

Explanation:

BitLocker:

 Microsoft

D only

C and D only

D, E, and F only

C, D, E, and F

Auto-unlock:

D only

C and D only

D, E, and F only

C, D, E, and F

Reference:

<https://docs.microsoft.com/en-us/windows-server/storage/refs/refs-overview>
[https://docs.microsoft.com/en-us/powershell/module/bitlocker/enable-bitlockerautounlock?](https://docs.microsoft.com/en-us/powershell/module/bitlocker/enable-bitlockerautounlock?view=windowsserver2022-ps)
[view=windowsserver2022-ps](https://docs.microsoft.com/en-us/powershell/module/bitlocker/enable-bitlockerautounlock?view=windowsserver2022-ps)

NEW QUESTION: 53

Your network contains an Active Directory Domain Services (AD DS) domain. The domain contains the servers shown in the following table.

Name	Description
Node1	Node in a failover cluster named Cluster1
Node2	Node in a failover cluster named Cluster1
Server1	Member server

The Failover Clustering tools are NOT installed on the servers.

You plan to enable Cluster-Aware Updating (CAU).

On which servers should you install the Failover Clustering tools to implement CAU in self-updating mode, and on which servers should you install the Failover Clustering tools to implement remote-updating mode? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Answer Area

Self-updating mode:

- Node1 only
- Server1 only
- Node1 and Node2 only
- Node1 and Server1 only
- Node1, Node2, and Server1

Remote-updating mode:

- Node1 only
- Server1 only
- Node1 and Node2 only
- Node1 and Server1 only
- Node1, Node2, and Server1

Answer:

Answer Area

Self-updating mode:

- Node1 only
- Server1 only
- Node1 and Node2 only
- Node1 and Server1 only
- Node1, Node2, and Server1

Remote-updating mode:

- Node1 only
- Server1 only
- Node1 and Node2 only
- Node1 and Server1 only
- Node1, Node2, and Server1

Explanation:



NEW QUESTION: 54

Your on-premises network is connected to Azure.

You have an Azure subscription. The subscription contains a virtual machine named VM1 that runs Windows Server.

You need to identify the latency between the on-premises network and VM1.

Which Azure Network Watcher settings should you use?

- A. IP flow verify
- B. VPN troubleshoot
- C. Connection monitor
- D. Connection troubleshoot

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 55

You have three Azure virtual machines named VM1, VM2, and VM3 that host a multitier application.

You plan to implement Azure Site Recovery.

You need to ensure that VM1, VM2, and VM3 fail over as a group.

What should you configure?

- A. an availability zone
- B. a recovery plan
- C. an availability set

Answer: ([SHOW ANSWER](#))

Reference:

<https://docs.microsoft.com/en-us/azure/site-recovery/site-recovery-overview>

NEW QUESTION: 56

You have an Azure subscription. The subscription contains a virtual machine named VM1 that runs Windows Server. A network interface named NI1 is assigned to VM1.

The Ethernet adapter on VM1 is disabled.

You need to use the Azure portal to enable the adapter.

What should you use from the portal?

- A. the Diagnostic settings for VM1
- B. the Configuration settings for VM1
- C. the Diagnostic settings for NI1
- D. the IP configurations settings for NI1
- E. the Reset password settings for VM1

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 57

Your network contains an Active Directory domain. The domain contains a domain controller named DC1 and a server named Server1 that runs Windows Server. You need to enable event log subscriptions to forward events from DC1 to Server1. Which command should you run to enable the Windows Event Collector service, and on which servers should you run the command? To answer, select the appropriate options in the answer area. NOTE: Each correct selection is worth one point.

Answer Area



Command:

wecutil qc /q

wecutil qc /q

wextutil el

winrm qc

Servers:

Server1 only

DC1 only

Server1 only

DC1 and Server1

Answer:

Answer Area



Command:

wecutil qc /q

wecutil qc /q

wextutil el

winrm qc

Servers:

Server1 only

DC1 only

Server1 only

DC1 and Server1

Explanation:

Answer Area

Command:


wecutil qc /q

Servers:

Server1 only

NEW QUESTION: 58

Your network contains an Active Directory Domain Services (AD DS) domain. The domain contains a server named Server1 that runs Windows Server. You add a user named Admin1 to the domain. You need to ensure that Admin1 can create a Data Collector Set on Server1. The solution must follow the principle of least privilege. To which security group should you add Admin1, and what should Admin1 use to create the Data Collector Set? To answer, select the appropriate options in the answer area. NOTE: Each correct selection is worth one point.

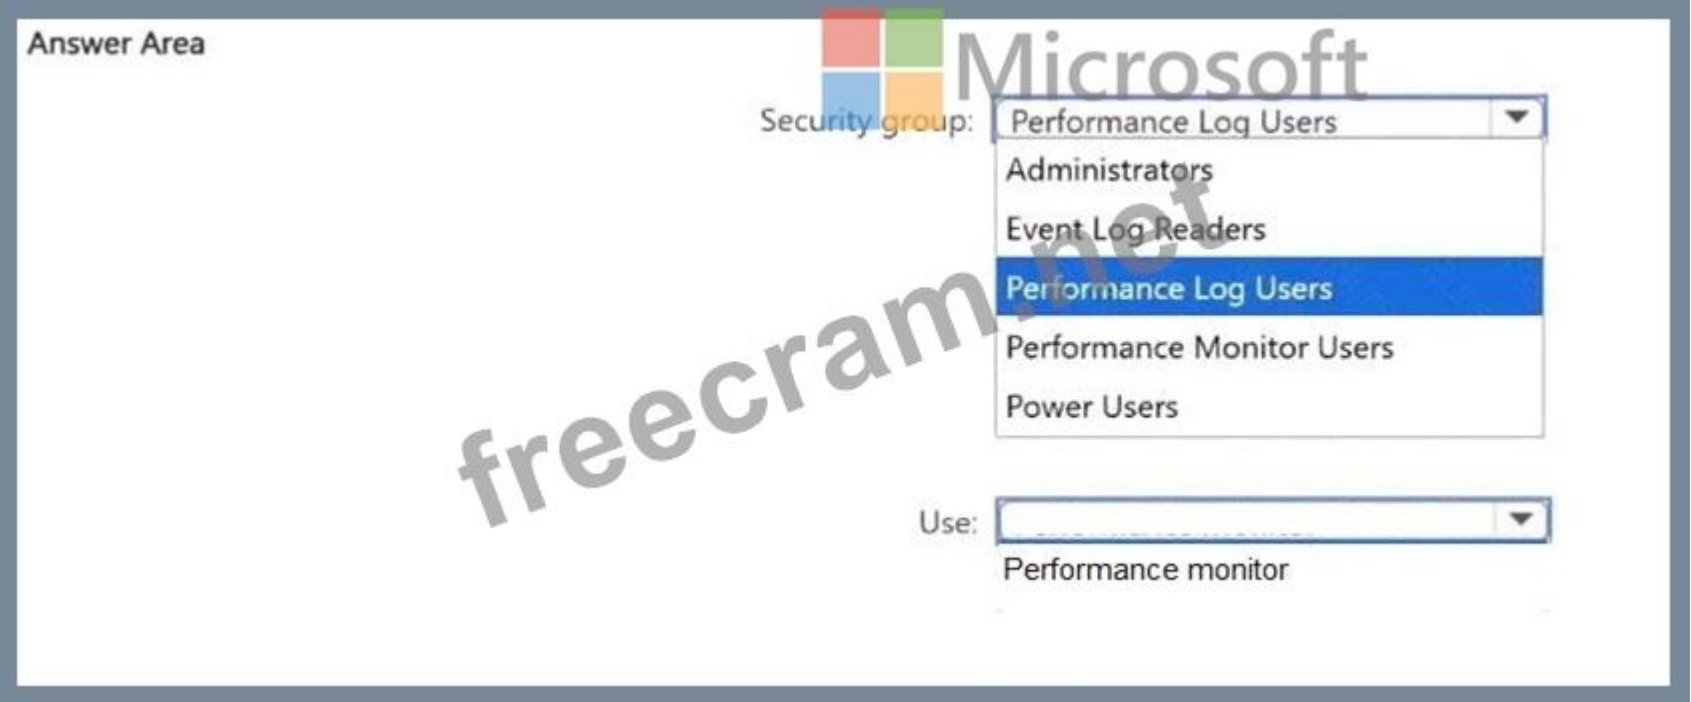

Answer:



Explanation:

Answer Area



NEW QUESTION: 59

Your on-premises network contains an Active Directory Domain Services (AD DS) domain. The domain contains 100 servers that run Windows Server and are Azure Arc-enabled.

You have an Azure subscription.

You need to automatically change the password for the built-in local administrator account on each computer in the domain. The solution must meet the following requirements:

* The password must change automatically every 30 days.

* Administrative effort must be minimized.

What should you use?

- A. an Azure policy
- B. Windows Local Administrator Password Solution (Windows LAPS)
- C. group managed service accounts (gMSAs)
- D. a Password Settings Object (PSO)

Answer: (SHOW ANSWER)

NEW QUESTION: 60

You have two on-premises servers named Served and Server2 that run Windows Server. Server1 hosts a virtual machine named VM1.

You have an Azure subscription.

You plan to back up VM1 by using Microsoft Azure Backup Server (MABS).

You need to deploy an on-premises MABS server. The solution must ensure that you can restore VM1, including its configuration data.

Which four actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Actions

⋮ From the Azure portal, create a Backup vault.

⋮ Install the Microsoft System Center Data Protection Manager (DPM) protection agent on Server1.

⋮ From the Azure portal, create a Recovery Services vault.

⋮ From the Azure portal, download the vault credentials file to Server2.

⋮ Install the software package on Server2.

⋮ Install the Microsoft System Center Data Protection Manager (DPM) protection agent on VM1.

Answer Area

Answer:

Actions

From the Azure portal, create a Backup vault.

Install the Microsoft System Center Data Protection Manager (DPM) protection agent on Server1.

From the Azure portal, create a Recovery Services vault.

From the Azure portal, download the vault credentials file to Server2.

Install the software package on Server2.

Install the Microsoft System Center Data Protection Manager (DPM) protection agent on VM1.

Answer Area

From the Azure portal, create a Recovery Services vault.

From the Azure portal, download the vault credentials file to Server2.

Install the software package on Server2.

Install the Microsoft System Center Data Protection Manager (DPM) protection agent on VM1.

Explanation:

From the Azure portal, create a Backup vault.

Install the Microsoft System Center Data Protection Manager (DPM) protection agent on Server1.

1 From the Azure portal, create a Recovery Services vault.

2 From the Azure portal, download the vault credentials file to Server2.

3 Install the software package on Server2.

4 Install the Microsoft System Center Data Protection Manager (DPM) protection agent on VM1.

NEW QUESTION: 61

Your network contain an Active Directory Domain Services (AD DS) domain named contoso.com. The domain was built by using domain controllers that run Windows Server 2025. You plan to deploy a custom app. The app will require a domain controller that runs a legacy version of Windows Server. What is the oldest version of Windows Server that you can use for the domain controller in contoso.com?

- A. Windows Server 2016
- B. Windows Server 2019
- C. Windows Server 2012 R2
- D. Windows Server 2022

Answer: (SHOW ANSWER)

Valid AZ-801 Dumps shared by EduDump.com for Helping Passing AZ-801 Exam! EduDump.com now offer the **newest AZ-801 exam dumps**, the EduDump.com AZ-801 exam **questions have been updated** and **answers have been corrected** get the **newest** EduDump.com AZ-801 dumps with Test Engine here: <https://www.edudump.com/exams/Microsoft/AZ-801/premium/> (297 Q&As Dumps, **35%OFF** Special Discount Code: **freecram**)

NEW QUESTION: 62

Your network contains an Active Directory Domain Services (AD DS) forest.

You need to deploy a Storage Spaces Direct converged infrastructure. The solution must meet the following requirements:

- * Use an Ethernet fabric
- * Eliminate the need for Data Center Bridging (DCB).

Which Remote Direct Memory Access (RDMA) networking technology should you implement?

- A. RoCEv2
- B. RoCEv1
- C. InfiniBand
- D. iWARP

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 63

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it as a result, these questions will not appear in the review screen.

You have an on-premises server named Server1 that runs Windows Server.

You have a Microsoft Sentinel instance.

You add the Windows Firewall data connector in Microsoft Sentine1.

You need to ensure that Microsoft Sentinel can collect Windows Firewall logs from Server1.

Solution: You install the Azure Connected Machine agent on Server1.

Does this meet the goal?

- A. Yes
- B. No

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 64

Your network contains an Active Directory Domain Service (AD DS) domain named contoso.com. The domain contains three domain controllers named DC1, DC2, and DC3.

You connect a Microsoft Defender or identity instances to the domain.

You need to onboard all the domain controllers to Defender for identity.

What should you run the domain controllers?

- A. AzureConnectedMachineAgent,ws1
- B. Azure ATP Sensor setup,exe
- C. MARAgentInstaller,exe
- D. MASetup-AMD64,exe

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 65

You have two servers that run Windows Server as shown in the following table.

Name	Location	Domain/workgroup
Server1	On-premises	Domain
Server2	Azure virtual machine	Workgroup

You need to copy the contents of volume E from Server1 to Server2. The solution must meet the following requirements:

- * Ensure that files in-use are copied.
- * Minimize administrative effort.

What should you use?

- A. Storage Replica
- B. Azure File Sync
- C. Azure Backup
- D. Storage Migration Service

Answer: (SHOW ANSWER)

NEW QUESTION: 66

You have an on-premises server named Server1 that runs Windows Server and has the Hyper-V server role installed.

You have an Azure subscription.

You plan to back up Server1 to Azure by using Azure Backup.

Which two Azure Backup options require you to deploy Microsoft Azure Backup Server (MABS)? Each correct answer presents a complete solution.

NOTE: Each correct selection is worth one point.

- A. Bare Metal Recovery
- B. Files and folders
- C. System State
- D. Hyper-V Virtual Machines

Answer: (SHOW ANSWER)

Reference:

https://docs.microsoft.com/en-us/azure/backup/backup-mabs-system-state-and-bmr

NEW QUESTION: 67

Your network contains an Active Directory Domain Services (AD DS) domain. The domain contains the servers shown in the following table.

Name	Operating system
Server1	Windows Server 2019
Server2	Windows Server 2025

Server1 contains the printers shown in the following table.

Name	Connected to
Printer1	A printer port named LPT1
Printer2	A local port named Port1
Printer3	A standard TCP/IP port of 192.158.10.15
Printer4	Prints to a file

You plan to use Print Management to migrate the printers to Server2. Which printers can be migrated and retain their current configuration?

- A. Printer3 only
- B. Printer3 and Printer4 only
- C. Printer 1, Printer3, and Printer4
- D. Printer1, Printer2, Printer3, and Printer4
- E. Printer1 Prnter3, and Printer4

Answer: (SHOW ANSWER)

NEW QUESTION: 68

Your network contains an Active Directory Domain Services (AD DS) domain named contoso.com.

You need to perform the following tasks:

- * Createasnapshotofcontoso.com.
- * Expose the snapshot as a read-only AD DS instance.

What should you use for each task? To answer, drag the appropriate tools to the correct tasks. Each tool may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.

NOTE: Each correct selection is worth one point.

Tools

Active Directory Administrative Center

Active Directory Users and Computers

Dsmain.exe

Dsmgmt.exe

Ntdsutil.exe

Answer Area

Create a snapshot:

Expose the snapshot as a read-only AD DS instance:

Answer:

Tools

Active Directory Administrative Center

Active Directory Users and Computers

Dsmain.exe

Dsmgmt.exe

Ntdsutil.exe

Answer Area

Create a snapshot:

Expose the snapshot as a read-only AD DS instance:

Ntdsutil.exe

Dsmain.exe

Explanation:

Tools

Active Directory Administrative Center

Active Directory Users and Computers

Dsmain.exe

Dsmgmt.exe

Ntdsutilexe

Answer Area

Create a snapshot: Ntdsutilexe

Expose the snapshot as a read-only AD DS instance: Dsmain.exe



NEW QUESTION: 69

You have multiple servers that run Windows Server.

You plan to use System Insights to collect information about your environment and systems.

How many default System Insights capabilities can you use for capacity forecasting?

- A. 4
- B. 3
- C. 6
- D. 5

Answer: (SHOW ANSWER)

NEW QUESTION: 70

Your network contains an Active Directory Domain Services (AD DS) domain named contoso.com. The domain contains the servers shown in the following table.

Name	Description
Server1	Runs Windows Server 2019 and hosts an ASP.NET website on Internet Information Services (IIS) named Site1
Server2	Runs Windows Server 2025 and has the Web Server (IIS) role installed

You need to migrate Site1 from Server 1 to Server2. The solution must meet the following requirements:

- * Minimize how long it takes to perform the migration.
- * Minimize administrative effort.

Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of cations to the answer area and arrange them in the correct order.

Actions

- On Server2, run smigdeploy.exe.
- On Server1, run msdeploy and specify the -verb:sync parameter.
- On Server2, install the Windows Server Migration Tools.
- On Server1, install the Web Deployment Tool.
- On Server1, run net start msdepvc.
- On Server2, run msdeploy and specify the -verb:sync parameter.

Answer Area

Answer:


Actions

- On Server2, run smigdeploy.exe.
- On Server1, run msdeploy and specify the -verb:sync parameter.
- On Server2, install the Windows Server Migration Tools.
- On Server1, install the Web Deployment Tool.
- On Server1, run net start msdepvc.
- On Server2, run msdeploy and specify the -verb:sync parameter.

Answer Area

- On Server1, install the Web Deployment Tool.
- On Server1, run net start msdepvc.
- On Server2, run msdeploy and specify the -verb:sync parameter.

Explanation:

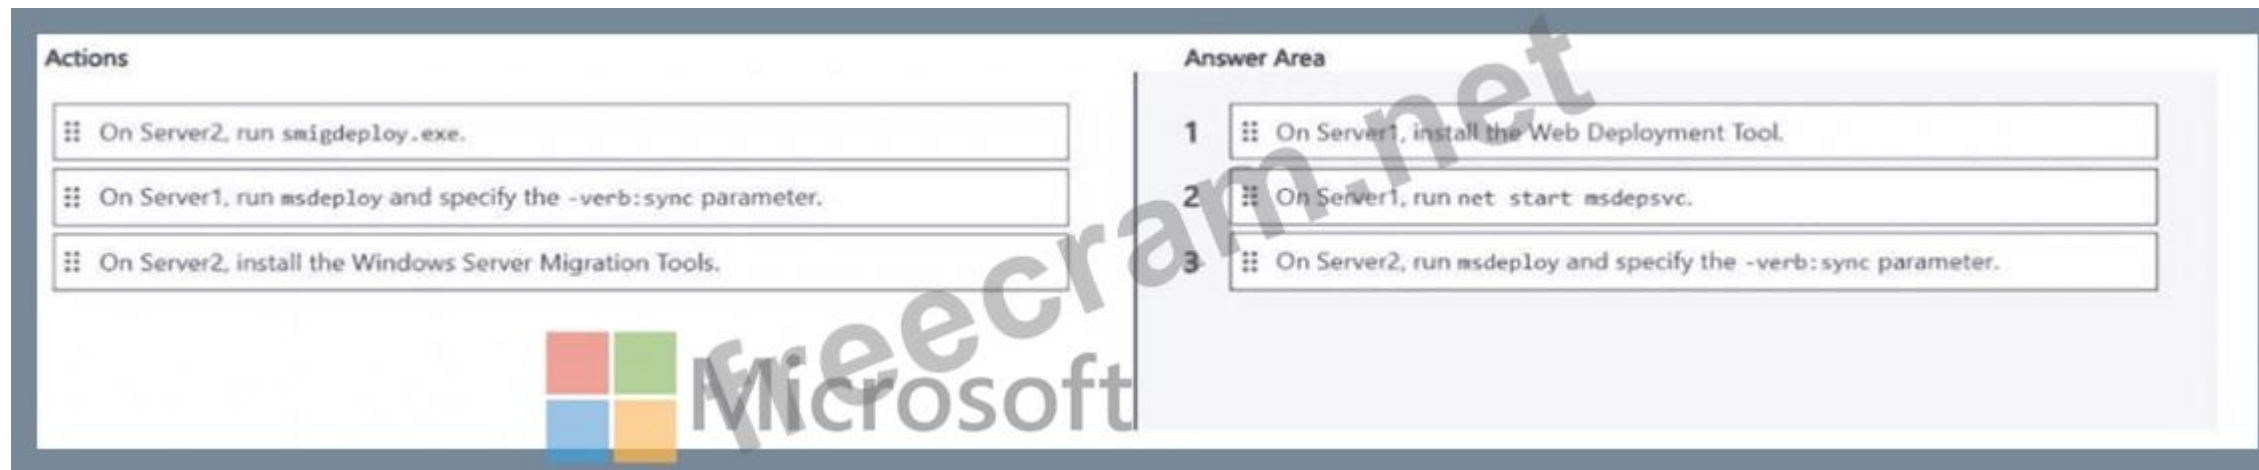

NEW QUESTION: 71

You have 200 Azure virtual machines.

You create a recovery plan in Azure Site Recovery to fail over all the virtual machines to an Azure region.

The plan has three manual actions.

You need to replace one of the manual actions with an automated process.

What should you use?

- A. an Azure Desired State Configuration (DSC) virtual machine extension
- B. an Azure Automation runbook
- C. an Azure PowerShell function
- D. a Custom Script Extension on the virtual machines

Answer: (SHOW ANSWER)

Reference:

<https://docs.microsoft.com/en-us/azure/site-recovery/recovery-plan-overview>

NEW QUESTION: 72

Your network contains an Active Directory Domain Services (AD DS) domain. The domain contains two servers named Server1 and Server2 that run Windows Server.

You need to ensure that you can use the Computer Management console to manage Server2. The solution must use the principle of least privilege.

Which two Windows Defender Firewall with Advanced Security rules should you enable on Server2? Each correct answer presents part of the solution.

NOTE: Each correct selection is worth one point.

- A. the COM+ Network Access (DCOM-In) rule
- B. all the rules in the Remote Event Log Management group
- C. the Windows Management Instrumentation (WMI-In) rule
- D. the COM+ Remote Administration (DCOM-In) rule
- E. the Windows Management Instrumentation (DCOM-In) rule

Answer: A,B (LEAVE A REPLY)

Reference:

<https://docs.microsoft.com/en-us/windows-server/administration/server-manager/configure-remote-management-in-server-manager>


NEW QUESTION: 73

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.


After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have a failover cluster named Cluster1 that hosts an application named App1.

The General tab in App1 Properties is shown in the General exhibit. (Click the General tab.)

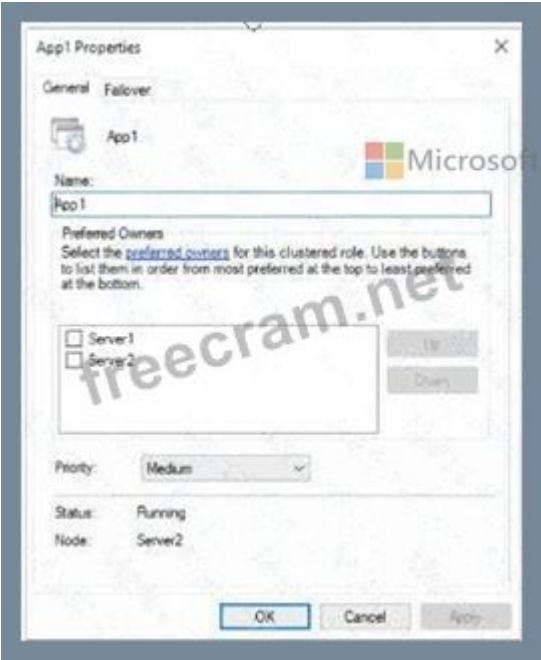

The Failover tab in App1 Properties is shown in the Failover exhibit. (Click the Failover tab.)

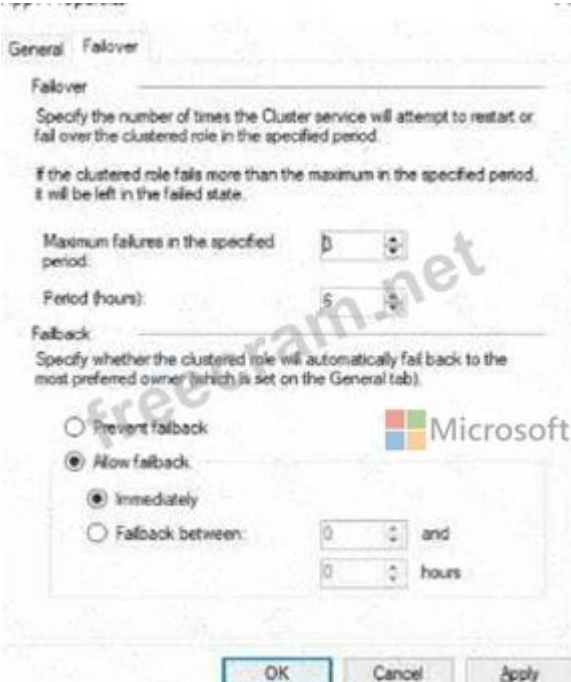

Server1 shuts down unexpectedly.

You need to ensure that when you start Server1, App1 continues to run on Server2.

Solution: You increase Maximum failures in the specified period for the App1 cluster role.

Does this meet the goal?

A. Yes

B. No

Answer: (SHOW ANSWER)

The Maximum failures setting is used to determine when the cluster determines that a node is offline. It does not affect whether a cluster will fail back when a node comes online.

NEW QUESTION: 74

You have an Azure virtual machine named VM1 that runs Windows Server.
You plan to deploy a new line-of-business (LOB) application to VM1.
You need to ensure that the application can create child processes.
What should you configure on VM1?

- A. Microsoft Defender Credential Guard
- B. Microsoft Defender Application Control
- C. Microsoft Defender SmartScreen
- D. Exploit protection

Answer: (SHOW ANSWER)

Reference:
<https://docs.microsoft.com/en-us/microsoft-365/security/defender-endpoint/customize-exploit-protection?view=o365-worldwide>

NEW QUESTION: 75

You have an on-premises server named Server1 that runs Windows Server.
You have an Azure subscription that uses Microsoft Defender for Cloud.
You need to onboard Server1 to Defender for Cloud.
Which actions should you perform in sequence? To answer, drag the appropriate actions to the correct order.
Each action may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.
NOTE: Each correct selection is worth one point.

Actions

Create a private endpoint.

Create an Azure Storage account.

Create and configure a data collection rule (DCR).

Create and configure an Azure runbook.

Create and upgrade a Log Analytics workspace.

Answer Area

Step 1:

Step 2: Install the Azure Connected Machine agent on Server1.

Step 3:

Answer:

Actions

Create a private endpoint.

Create an Azure Storage account.

Create and configure a data collection rule (DCR).

Create and configure an Azure runbook.

Create and upgrade a Log Analytics workspace.

Answer Area

Step 1: Create and upgrade a Log Analytics workspace.

Step 2: Install the Azure Connected Machine agent on Server1.

Step 3: Create and configure a data collection rule (DCR).

Explanation:

Actions

Create a private endpoint.

Create an Azure Storage account.

Create and configure a data collection rule (DCR).

Create and configure an Azure runbook.

Answer Area

Step 1: Create and upgrade a Log Analytics workspace.

Step 2: Install the Azure Connected Machine agent on Server1.

Step 3: Create and configure a data collection rule (DCR).

NEW QUESTION: 76

What is the effective minimum password length for User1 and Admin1? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

User1:

8

9

10

11

12

Admin1:

8

9

10

11

12

Answer:

User1:

Admin1:

Explanation:

User1:

Admin1:

Box 1: 9

When multiple PSOs apply to a user, the PSO with the highest precedence (lowest precedence number) applies which in this case is PSO1.

Box 2: 8

There are no PSOs applied to Admin1 so the password policy from the Default Domain GPO applies.

The Minimum password length setting in GPO1 would only apply to local user accounts on computers in OU1. It does not apply to domain user accounts.

Valid AZ-801 Dumps shared by EduDump.com for Helping Passing AZ-801 Exam! EduDump.com now offer the **newest AZ-801 exam dumps**, the EduDump.com AZ-801 exam **questions have been updated** and **answers have been corrected** get the **newest** EduDump.com AZ-801 dumps with Test Engine here: <https://www.edudump.com/exams/Microsoft/AZ-801/premium/> (297 Q&As Dumps, **35%OFF** Special Discount Code: **freecram**)

NEW QUESTION: 77

You have 20 on-premises servers, including a server named Server1, that run Windows Server. Server1 has Windows Admin Center deployed and is connected to the internet. You have an Azure subscription. You need to integrate Windows Admin Center with Azure so that you can use Azure services to manage and monitor the on-premises servers. What should you do first?

- A. Enable Azure Arc on each managed server.
- B. Install Microsoft Entra Connect Sync on Server1.
- C. From Server1, run the Connect-AzAccount cmdlet.
- D. From Server1, run the Set-AzWebApp cmdlet.

Answer: A (LEAVE A REPLY)

NEW QUESTION: 78

Your network contains an Active Directory Domain Services (AD DS) domain. The domain contains servers that run Windows Server 2022. You have a Storage Spaces Direct cluster named SSCluster1 that contains two physical nodes named Node1 and Node2. Node1 and Node2 host highly available virtual machines. You plan to perform an in-place upgrade to Windows Server 2025 on Node1. You need to ensure that the virtual machines remain running during the upgrade. Which four actions should you perform in sequence on Node1? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Run Suspend-ClusterResource.

Run Resume-ClusterResource.

Run Suspend-ClusterNode -Drain and place the node in storage maintenance mode.

Upgrade to Windows Server 2025.

Remove from storage maintenance mode.

Run Resume-ClusterNode

Answer:

Actions

Run Suspend-ClusterResource.

Run Resume-ClusterResource.

Run Suspend-ClusterNode -Drain and place the node in storage maintenance mode.

Upgrade to Windows Server 2025.

Remove from storage maintenance mode.

Run Resume-ClusterNode.

Answer Area

Run Suspend-ClusterNode -Drain and place the node in storage maintenance mode.

Upgrade to Windows Server 2025.

Remove from storage maintenance mode.

Run Resume-ClusterNode.

Explanation:

Actions

Run Suspend-ClusterResource.

Run Resume-ClusterResource.

Answer Area

1 Run Suspend-ClusterNode -Drain and place the node in storage maintenance mode.

2 Upgrade to Windows Server 2025.

3 Remove from storage maintenance mode.

4 Run Resume-ClusterNode.

NEW QUESTION: 79

You are planning the implementation of Cluster2 to support the on-premises migration plan.
You need to ensure that the disks on Cluster2 meet the security requirements.
In which order should you perform the actions? To answer, move all actions from the list of actions to the answer area and arrange them in the correct order.

Actions

Add a disk resource to the cluster.

Enable BitLocker on the volume.

Update the BitLockerProtectorInfo property of the volume.

Create a Cluster Shared Volume (CSV).

Put the disk in maintenance mode.

Answer Area

Answer:

Actions	Answer Area
Add a disk resource to the cluster.	Add a disk resource to the cluster.
Enable BitLocker on the volume.	Create a Cluster Shared Volume (CSV).
Update the BitLockerProtectorInfo property of the volume.	Put the disk in maintenance mode.
Create a Cluster Shared Volume (CSV).	Enable BitLocker on the volume.
Put the disk in maintenance mode.	Update the BitLockerProtectorInfo property of the volume.

Explanation:

Add a disk resource to the cluster.

Create a Cluster Shared Volume (CSV).

Put the disk in maintenance mode.

Enable BitLocker on the volume.

Update the BitLockerProtectorInfo property of the volume.

Reference:

<https://docs.microsoft.com/en-us/windows-server/failover-clustering/bitlocker-on-csv-in-ws-2022>

NEW QUESTION: 80

You have an Azure subscription.
Your on-premises network connects to Azure by using an Azure VPN gateway named VPN1.
You need to monitor the Azure gateway health probe for VPN1.
Which TCP port should you use?

- A. 443
- B. 8081
- C. 3389
- D. 1723
- E. 65500

Answer: (SHOW ANSWER)

NEW QUESTION: 81

You have an Azure subscription. The subscription contains a virtual machine named VM1 that runs Windows Server and is in the East US Azure region. The subscription contains the storage accounts shown in the following table.

Name	Kind	Location
storage1	StorageV2	East US
storage2	BlockBlobStorage	East US
storage3	FileStorage	East US
storage4	StorageV2	Central US

You plan to configure the Diagnostic settings for VM1. Which storage accounts should you specify for the settings?

- A. storage1, storage2, and storage3 only
- B. storage1 and storage2 only
- C. storage1 only
- D. storage1, storage2, storage3, and storage4
- E. storage1 and storage4 only

Answer: (SHOW ANSWER)

NEW QUESTION: 82

You are remediating the firewall security risks to meet the security requirements.

What should you configure to reduce the risks?

- A. a Group Policy Object (GPO)
- B. adaptive network hardening in Microsoft Defender for Cloud
- C. a network security group (NSG) in Sub1
- D. an Azure Firewall policy

Answer: (SHOW ANSWER)

Firewall rules configured in a Group Policy Object cannot be modified by local server administrators.

Reference:

<https://docs.microsoft.com/en-us/windows/security/threat-protection/windows-firewall/create-an-inbound-port-rule>

NEW QUESTION: 83

You have 50 on-premises servers that run Windows Server.

You have an Azure subscription that contains a Recovery Services vault named Vault1.

You plan to back up the on-premises servers to Vault1 by using Microsoft Azure Backup Server (MABS).

You need to configure prerequisites to support MABS. The solution must minimize costs.

What should you do for Vault1, and what should you deploy on-premises? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Answer Area

Microsoft

For Vault1

Configure Azure Site Recovery.
Create a private endpoint.
Modify the Default Policy backup policy.
Select the storage replication type.

Deploy on-premises

Azure Network Adapter
MABS
The Azure Connected Machine agent
The Microsoft Azure Recovery Services (MARS) agent

Answer:

Answer Area

For Vault1:

Deploy on-premises:

Microsoft

Explanation:

Answer Area

For Vault1:

Deploy on-premises:

Microsoft

NEW QUESTION: 84

You have three Hyper-V hosts named Server 1, Server2, and Server 3 that run Windows Server Server1 hosts a virtual machine named VM1. You enable Hyper-V Replica to replicate VM1 to Server2 and set the replication frequency to 30 seconds. You need to extend the replication and create a second replica of VM1. On which Hyper-V hosts can you configure the replication, and what is the minimum replication frequency you can use? To answer, select the appropriate options in the answer area. NOTE: Each correct selection is worth one point.

Answer Area

Hyper-V hosts:

Replication frequency:

Microsoft

Answer:

Answer Area

Hyper-V hosts:

- Server1 only
- Server2 only
- Server3 only
- Server1 or Server2 only
- Server1, Server2, or Server3

Replication frequency:

- 30 seconds
- 5 minutes
- 15 minutes

Microsoft

Explanation:
Answer Area

Hyper-V hosts: Server2 only

Replication frequency: 5 minutes

Microsoft

NEW QUESTION: 85

Your network contains an Active Director/ Domain Services {AD DS} domain named contoso.com. The domain contains two sites named Site1 and Site2 and servers that run Windows Server and are configured as shown in the following table.

Name	In site	Type
DC1	Site1	Domain controller
DC2	Site1	Domain controller
RODC1	Site2	Read-only domain controller (RODC)
Server1	Site1	Member server
Server2	Site2	Member server
Server3	Site2	Member server

The domain contains a group named Group1 that contains Server3.

RODC1 has the Password Replication Policy shown in the following exhibit.

RODC1 Properties

Microsoft

?

×

General

Operating System

Member Of

Delegation

Password Replication Policy

Location

Managed By

Dial-in

This is a Read-only Domain Controller (RODC). An RODC stores users and computers passwords according to the policy below. Only passwords for accounts that are in the Allow groups and not in the Deny groups can be replicated to the RODC.

Groups, users and computers:

Name	Setting
Account Operators	Deny
Administrators	Deny
Allowed RODC Password Replication Group	Allow
Backup Operators	Deny
Denied RODC Password Replication Group	Deny
Group1	Allow
Server Operators	Deny

Advanced...

Add...

Remove

Answer Area

Microsoft

Statements

If User1 authenticates by using RODC1, the user's credentials will be stored on RODC1.

User2 can sign in to Server3 if connectivity between Site1 and Site2 fails.

User3 can sign in to RODC1 locally.

Yes

No

☐

☐

☐

☐

☐

Answer:

Answer Area

Microsoft

Statements

If User1 authenticates by using RODC1, the user's credentials will be stored on RODC1.

User2 can sign in to Server3 if connectivity between Site1 and Site2 fails.

User3 can sign in to RODC1 locally.

Yes

No

☐

☒

☒

☐

☒

Explanation:

Answer Area



Microsoft

Statements

If User1 authenticates by using RODC1, the user's credentials will be stored on RODC1.

User2 can sign in to Server3 if connectivity between Site1 and Site2 fails.

User3 can sign in to RODC1 locally.

Yes

No

☐

☒

☐

☐

☐

☒

NEW QUESTION: 86

You have an Azure subscription. The subscription contains a Log Analytics workspace named Workspace1 and 100 virtual machines that run Windows Server. You enable Microsoft Defender for Servers Plan 2 and configure Defender for Servers to monitor for Windows file and registry changes on the virtual machines. You need to query the detected file and registry changes. Which table should you query?

- A. ASimRegistryEventlogs
- B. MDCDetectionFimEvents
- C. ASimFileEventLogs
- D. DeviceRegistryEvents

Answer: (SHOW ANSWER)

NEW QUESTION: 87

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have a server named Server1 that runs Windows Server.

You need to ensure that only specific applications can modify the data in protected folders on Server1.

Solution: From Virus & threat protection, you configure Controlled folder access.

Does this meet the goal?

- A. Yes
- B. No

Answer: (SHOW ANSWER)

Reference:

https://docs.microsoft.com/en-us/microsoft-365/security/defender-endpoint/customize-controlled-folders?view=o365-worldwide

NEW QUESTION: 88

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

Your network contains a single-domain Active Directory Domain Services (AD DS) forest named contoso.com. The functional level of the forest is Windows Server 2012 R2. All domain controllers run Windows Server 2012 R2. Sysvol replicates by using the File Replication Service (FRS). You plan to replace the existing domain controllers with new domain controllers that will run Windows Server 2022. You need to ensure that you can add the first domain controller that runs Windows Server 2022. Solution: You migrate sysvol from FRS to Distributed File System (DFS) Replication. Does this meet the goal?

- A. Yes
 - B. No
- Answer: (SHOW ANSWER)

Reference:
<https://www.rebeladmin.com/2021/09/step-by-step-guide-active-directory-migration-from-windows-server-2008-r2-to-windows-server-2022/>

NEW QUESTION: 89

You need to create a Hyper-V hyper-converged cluster that stores virtual machines by using Storage Spaces. Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Actions

Enable Storage Spaces Direct.

Add a Scale-Out File Server for application role.

Create a Distributed File System (DFS) namespace.

Create a failover cluster.

Create a file share.

Create a volume.

Answer Area

Create a failover cluster.

Enable Storage Spaces Direct.

Create a volume.

Answer:

Actions

Enable Storage Spaces Direct.

Add a Scale-Out File Server for application role.

Create a Distributed File System (DFS) namespace.

Create a failover cluster.

Create a file share.

Create a volume.

Answer Area

Create a failover cluster.

Enable Storage Spaces Direct.

Create a volume.

Explanation:

Answer Area

1 Create a failover cluster.

2 Enable Storage Spaces Direct.

3 Create a volume.

NEW QUESTION: 90

You have a failover cluster named Cluster1 that contains three Windows Server nodes named Node 1, Node2.

and Node3.


You need to deploy a Storage Spaces Direct virtual disk to Cluster1.

You add the following disks to each node:


- * Three 512-GB NVMe disks
- * Three 3-TB diskS
- * Three 1-TB SSD disks

On Cluster1. you enable Storage Spaces Direct and add the new disks.

What is the total amount of disk space available for the Storage Spaces Direct virtual disk, and which operations are cached for the SSD and HDD disks? To answer, select the appropriate options in the answer area.

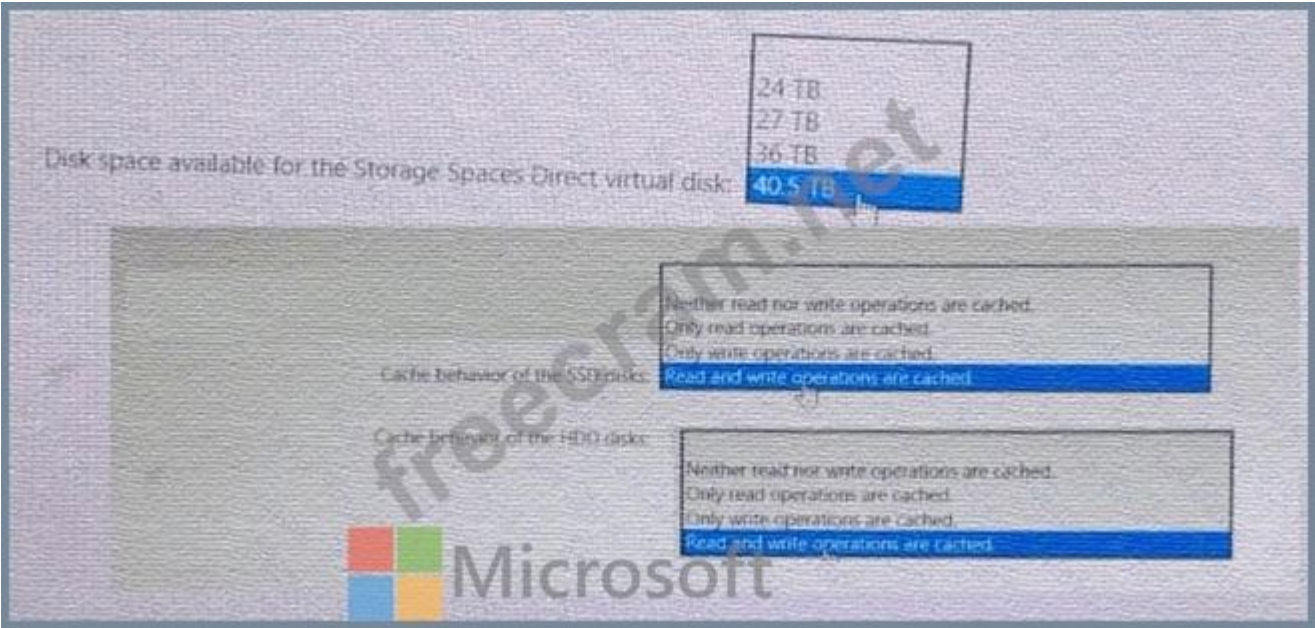

Answer:

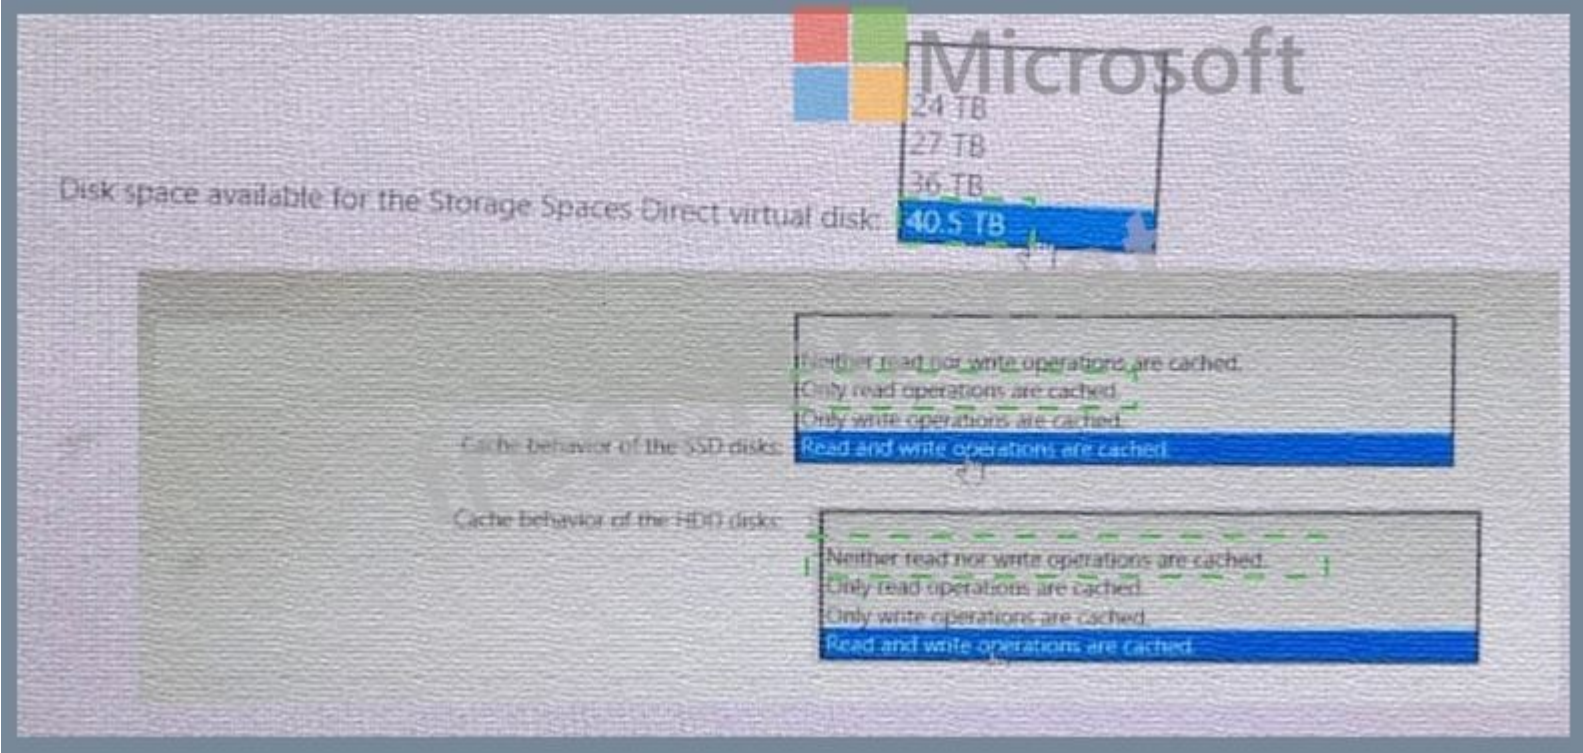

NEW QUESTION: 91

You have an on-premises server named Server1 that runs Windows Server and has the Hyper-V server role installed. Server1 hosts a virtual machine named VM1 that runs Windows Server.

You need to protect VM1 by using Azure Site Recovery. The solution must use Azure as the disaster recovery site.
Which four actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Actions

From the Azure portal, create an Azure Backup vault.

From the Azure portal, create a Recovery Services vault.

From the Azure portal, create a Hyper-V site.

On Server1, download and install the Azure Site Recovery Provider.

From the Azure portal, configure the target environment.

Answer Area

Answer:

Actions

From the Azure portal, create an Azure Backup vault.

From the Azure portal, create a Recovery Services vault.

From the Azure portal, create a Hyper-V site.

On Server1, download and install the Azure Site Recovery Provider.

From the Azure portal, configure the target environment.

Answer Area

From the Azure portal, create a Recovery Services vault.

From the Azure portal, create a Hyper-V site.

On Server1, download and install the Azure Site Recovery Provider.

From the Azure portal, configure the target environment.

Explanation:

Actions

From the Azure portal, create an Azure Backup vault.

Answer Area

1 From the Azure portal, create a Recovery Services vault.

2 From the Azure portal, create a Hyper-V site.

3 On Server1, download and install the Azure Site Recovery Provider.

4 From the Azure portal, configure the target environment.

Valid AZ-801 Dumps shared by EduDump.com for Helping Passing AZ-801 Exam! EduDump.com now offer the **newest AZ-801 exam dumps**, the EduDump.com AZ-801 exam **questions have been updated** and **answers have been corrected** get the **newest** EduDump.com AZ-801 dumps with Test Engine here: <https://www.edudump.com/exams/Microsoft/AZ-801/premium/> (297 Q&As Dumps, **35%OFF** Special Discount Code: **freecram**)

NEW QUESTION: 92

You have a failover cluster named Cluster1 that contains three nodes.

You plan to add two file server cluster roles named File1 and File2 to Cluster1. File1 will use the File Server for general use role. File2 will use the Scale-Out File Server for application data role.

What is the maximum number of nodes for File1 and File2 that can concurrently serve client connections? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

File1:

1

2

3

File2:

1

2

3

Answer:

File1:

1

2

3

File2:

1

2

3

Explanation:

File1:

1

2

3

File2:

1

2

3

Reference:

<https://docs.microsoft.com/en-us/windows-server/failover-clustering/sofs-overview>

NEW QUESTION: 93

You have a single-domain Active Directory Domain Services (AD DS) forest named contoso.com that contains two domain controllers named DC1 and DC2. DC1 and DC2 run Windows Server.

You plan to perform an authoritative restore of SYSVOL on DC1.

You isolate DC1 and restore DC1 from a backup.

You need to ensure that SYSVOL on DC1 replicates to DC2.

Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Actions

Answer Area

From Active Directory Users and Computers on DC2, select **Advanced Features**.

For the computer object of DC2, select **SYSVOL Subscription** and modify the value of the `msDFS-Options` attribute.

From Active Directory Users and Computers on DC1, select **Advanced Features**.

For the computer object of DC1, select **SYSVOL Subscription** and modify the value of the `msDFS-Options` attribute.

Connect DC1 to the network.

Answer:

Actions

From Active Directory Users and Computers on DC2, select **Advanced Features**.

For the computer object of DC2, select **SYSVOL Subscription** and modify the value of the `msDFS-Options` attribute.

From Active Directory Users and Computers on DC1, select **Advanced Features**.

For the computer object of DC1, select **SYSVOL Subscription** and modify the value of the `msDFS-Options` attribute.

Connect DC1 to the network.

Answer Area

From Active Directory Users and Computers on DC1, select **Advanced Features**.

For the computer object of DC1, select **SYSVOL Subscription** and modify the value of the `msDFS-Options` attribute.

Connect DC1 to the network.

Explanation:

ACTIONS

From Active Directory Users and Computers on DC2, select Advanced Features .
For the computer object of DC2, select SYSVOL Subscription and modify the value of the msDFSr-Options attribute.

Answer Area

1	From Active Directory Users and Computers on DC1, select Advanced Features .
2	For the computer object of DC1, select SYSVOL Subscription and modify the value of the msDFSr-Options attribute.
3	Connect DC1 to the network.

NEW QUESTION: 94

Your network contains an Active Directory Domain Services (AD DS) domain that has the Active Directory Recycle Bin enabled. The domain contains two domain controllers named DC1 and DC2. The system state of the domain controllers is backed up daily at 23:00 by using Windows Server Backup. You have an organizational unit (OU) named ParisUsers that contains 1,000 users. At 08:00, DC1 shuts down for hardware maintenance. The maintenance completes, but DC1 remains shut down. At 09:00, an administrative error causes the manager attribute of each user in ParisUsers to be deleted. You need to recover the user account details as quickly as possible. The solution must minimize data loss. Which three actions should you perform in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Actions	Answer Area
Start DC1 normally.	
Perform an authoritative restore on DC1.	
Recover all the user objects in the Active Directory Recycle Bin.	
Start DC1 by using the Last Known Good Configuration.	
Start DC1 in Directory Services Restore Mode.	
Perform a system state restore on DC1.	

Answer:

Actions
Start DC1 normally.
Perform an authoritative restore on DC1.
Recover all the user objects in the Active Directory Recycle Bin.
Start DC1 by using the Last Known Good Configuration.
Start DC1 in Directory Services Restore Mode.
Perform a system state restore on DC1.

Answer Area
Start DC1 in Directory Services Restore Mode.
Perform a system state restore on DC1.
Perform an authoritative restore on DC1.

Explanation:

Start DC1 in Directory Services Restore Mode.
Perform a system state restore on DC1.
Perform an authoritative restore on DC1.

NEW QUESTION: 95

Your network contains an Active Directory Domain Services (AD DS) domain named contoso.com. The domain contains domain controllers that run Windows Server 2016. You build a new AD DS forest named nwtraders.com. The forest contains domain controllers that run Windows Server 2025. You plan to perform a phased migration from contoso.com to nwtraders.com. You perform the following actions:

- * Migrate the users in contoso.com to nwtraders.com and enable sIDHistory.
- * Establish a two-way forest trust between contoso.com and nwtraders.com.
- * Install the Active Directory Migration Tool (ADMT) in nwtraders.com.

Answer Area

Microsoft

Statements

The permissions for the resources in contoso.com must be updated to allow migrated users access.

Migrated users can sign in to nwtraders.com by using their password for contoso.com.

Contoso.com must contain a server that runs Windows Server 2025 to migrate user profiles by using ADMT.

Yes

No

☐

☐

☐

☐

Answer:

Answer Area

Statements	Yes	No
The permissions for the resources in contoso.com must be updated to allow migrated users access.	☐	☒
Migrated users can sign in to nwtraders.com by using their password for contoso.com.	☒	☐
Contoso.com must contain a server that runs Windows Server 2025 to migrate user profiles by using ADMT.	☐	☒

Explanation:

Statements	Yes	No
The permissions for the resources in contoso.com must be updated to allow migrated users access.	☐	☒
Migrated users can sign in to nwtraders.com by using their password for contoso.com.	☒	☐
Contoso.com must contain a server that runs Windows Server 2025 to migrate user profiles by using ADMT.	☐	☒

NEW QUESTION: 96

You deploy Azure Migrate to an on-premises network.

You have an on-premises physical server named Server1 that runs Windows Server and has the following configurations:

- * Operating system disk; 600 GB
- * Data disk: 3 TB
- * NIC Teaming: Enabled
- * Mobility service: Installed
- * Windows Defender Firewall: Enabled
- * Microsoft Defender Antivirus: Enabled

You need to ensure that you can use Azure Migrate to migrate Server1.

Solution: You disable Windows Defender Firewall on Server 1.

Does this meet the goal?

- A. No
- B. Yes

Answer: (SHOW ANSWER)

NEW QUESTION: 97

You have a Windows Server 2022 Remote Desktop Services deployment that includes the servers shown in the following table.

Name	RDS role
Server1	RD Session host
Server2	RD Virtualization host
Server3	RD Connection Broker
Server4	RD Web Access server
Server5	RD Gateway server

You need to upgrade Remote Desktop Services deployment to Windows Server 2025.

Which server must you upgrade first?

- A. Servers
- B. Server3
- C. Server 1
- D. Server2
- E. Server 4

Answer: (SHOW ANSWER)

NEW QUESTION: 98

You have two servers named Server1 and Server2 that run Windows Server and have the Hyper-V role installed. You plan to deploy Hyper-V Replica between Server1 and Server2. The deployment will use certificate-based authentication. You need to configure the prerequisites for the Hyper-V Replica deployment.

Which two actions should you perform on each server? Each correct answer presents part of the solution.

NOTE: Each correct answer is worth one point.

- A. Install a trusted computer certificate.
- B. Enable the Hyper-V Replica HTTP Listener (TCP-In) firewall rule.
- C. Create a self-signed certificate.
- D. Install a trusted user certificate.
- E. Enable the Hyper-V Replica HTTPS Listener (TCP-In) firewall rule.

Answer: (SHOW ANSWER)

NEW QUESTION: 99

You have the servers shown in the following table.

Name	Operating system	Configuration	Install option
Server1	Windows Server 2016	File server	Server Core
Server2	Windows Server 2025	File server	Server Core
Server3	Windows Server 2016	Domain controller	Server with Desktop Experience

You plan to migrate file shares from Server1 to Server2.

You need to deploy the Storage Migration Service and the Storage Migration Service extension.

On which server should you install each component? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.



Answer:



Explanation:



NEW QUESTION: 100

You have an Azure subscription. The subscription contains a virtual machine named VM1 that runs Windows Server and uses Azure Disk Encryption. You need to identify which Azure key vault stores the encryption keys for VM1. The solution must minimize administrative effort. Which PowerShell cmdlet should you run?

- A. Get-AzDiskEncryptionSet
- B. Get-AzKeyVaultKey
- C. Get-AiKeyVault
- D. Get-AzVMDiskEncryptionStatus


Answer: ([SHOW ANSWER](#))

NEW QUESTION: 101


You have a Windows Server Failover Cluster (WSFQ that has the following configurations:

- * Name: App1
- * Owner node: Node3
- * Type: Generic Application

The General settings for App1 are shown in the General exhibit. (Click the General tab.)

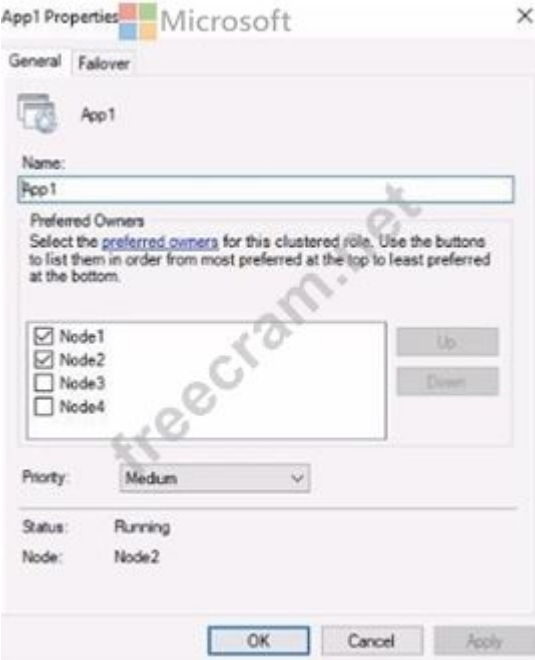

The Failover settings for App1 are shown in the Failover exhibit. (Click the Failover tab.)

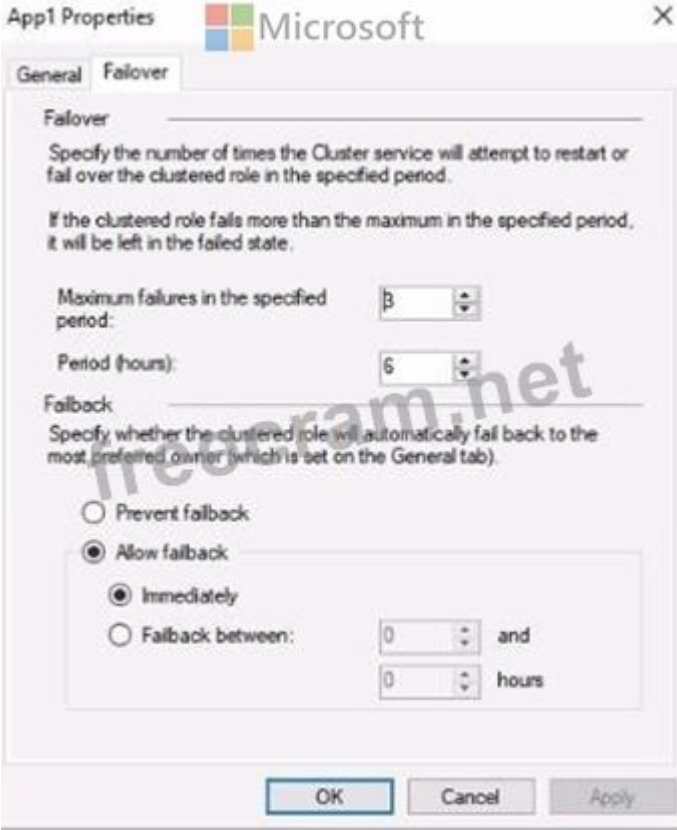

The Advanced Policies settings for App1 are shown in the Advanced Policies exhibit. (Click the Advanced Policies tab.)

App1 Properties

General Fallover

Fallover

Specify the number of times the Cluster service will attempt to restart or fail over the clustered role in the specified period.

If the clustered role fails more than the maximum in the specified period, it will be left in the failed state.

Maximum failures in the specified period: 3

Period (hours): 6

Fallback

Specify whether the clustered role will automatically fail back to the most preferred owner (which is set on the General tab).

☐ Prevent fallback

☒ Allow fallback

☒ Immediately

☐ Fallback between: 0 and 0 hours

OK Cancel Apply

For each of the following statements, select Yes if the statement is true Otherwise, select No.

NOTE: Each correct selection is worth one point.

Answer Area

Statements	Yes	No
You can move App1 to Node4 manually.	☐	☐
If Node3 fails, App1 will fail over to Node2 automatically.	☐	☐
If App1 automatically fails over from Node3, App1 will fail back to Node3 automatically after Node3 is repaired.	☐	☐

Answer:

Answer Area

Statements	Yes	No
You can move App1 to Node4 manually.	☐	☒
If Node3 fails, App1 will fail over to Node2 automatically.	☐	☒
If App1 automatically fails over from Node3, App1 will fail back to Node3 automatically after Node3 is repaired.	☒	☐

Explanation:

Answer Area

Statements	Yes	No
You can move App1 to Node4 manually.	☐	☒
If Node3 fails, App1 will fail over to Node2 automatically.	☐	☒
If App1 automatically fails over from Node3, App1 will fail back to Node3 automatically after Node3 is repaired.	☒	☐

NEW QUESTION: 102

You have two physical servers named AppSrv1 and AppSrv2 and an unconfigured server named Server1. All the servers run Windows Server. Only Server1 can access the internet.

You plan to use Azure Site Recovery to replicate AppSrv1 and AppSrv2 to Azure.

You need to deploy the required components to AppSrv1, AppSrv2, and Server1.

Which components should you deploy? To answer, drag the appropriate components to the correct servers.

Each component may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.

NOTE: Each correct selection is worth one point.

Components

- The Azure Connected Machine agent
- An Azure Site Recovery configuration server
- The Azure Site Recovery Mobility Service
- The Microsoft Azure Recovery Services (MARS) agent

Answer Area

To AppSrv1 and AppSrv2:

Component

To Server1:

Component

Answer:

Components

- The Azure Connected Machine agent
- An Azure Site Recovery configuration server
- The Azure Site Recovery Mobility Service
- The Microsoft Azure Recovery Services (MARS) agent

Answer Area

To AppSrv1 and AppSrv2: The Azure Site Recovery Mobility Service

To Server1: An Azure Site Recovery configuration server

Explanation:

To AppSrv1 and AppSrv2: The Azure Site Recovery Mobility Service

To Server1: An Azure Site Recovery configuration server

Reference:

<https://docs.microsoft.com/en-us/azure/site-recovery/physical-azure-architecture>

<https://docs.microsoft.com/en-us/azure/site-recovery/physical-azure-set-up-source>

NEW QUESTION: 103

You need to use a comma-separated value (CSV) file to import server inventory to Azure Migrate. Which fields are mandatory for each entry in the CSV file?

- A. Server name, Cores, OS Name, and Memory (in MB)
- B. Server name, IP addresses, Disk 1 size (in GB), and CPU utilization percentage
- C. Server name, IP addresses, OS version, and Number of disks

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 104

Your network contains an Active Directory Domain Services (AD DS) domain. You need to deploy a Storage Spaces Direct cluster that has nested resiliency. What is the maximum number of nodes you can deploy to the cluster?

- A. 32
- B. 4
- C. 12
- D. 2
- E. 16

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 105

You have a cluster named Cluster1 that contains two servers named Server1 and Server2. Cluster1 has Storage Spaces Direct enabled. Cluster1 contains a virtual disk named Volume1 that is a 2-TB three-way mirror. You discover that Volume1 is full. You connect a new 2-TB physical disk to each node of Cluster1. You need to increase the size of Volume1. The solution must maintain resiliency. How should you complete the script? To answer, select the appropriate options in the answer area. NOTE: Each correct selection is worth one point.

Answer Area

Microsoft

Resize-Volume -FileSystemLabel Volume1 -Size

1TB

2TB

4TB

Add-PhysicalDisk -PhysicalDisks (Get-Disk | Where-Object IsOffline -eq \$False) -StoragePoolFriendlyName Cluster1

Add-PhysicalDisk -PhysicalDisks (Get-PhysicalDisk -CanPool \$False -FriendlyName *-1) -StoragePoolFriendlyName S2D*

Add-PhysicalDisk -PhysicalDisks (Get-PhysicalDisk -CanPool \$True -FriendlyName *-2) -StoragePoolFriendlyName S2D*

Answer:

Answer Area

Add-PhysicalDisk -PhysicalDisks (Get-Disk | Where-Object IsOffline -eq \$False) -StoragePoolFriendlyName Cluster1

Add-PhysicalDisk -PhysicalDisks (Get-PhysicalDisk -CanPool \$False -FriendlyName *-1) -StoragePoolFriendlyName S2D*

Add-PhysicalDisk -PhysicalDisks (Get-PhysicalDisk -CanPool \$True -FriendlyName *-2) -StoragePoolFriendlyName S2D*

Resize-Volume -FileSystemLabel Volume1 -Size

1TB

2TB

4TB

Explanation:

Answer Area

Add-PhysicalDisk -PhysicalDisks (Get-PhysicalDisk -CanPool \$True -FriendlyName *-2) -StoragePoolFriendlyName S2D*

Resize-Volume -FileSystemLabel Volume1 -Size

4TB

NEW QUESTION: 106

You have two Azure virtual networks named Vnet1 and Vnet2.

You have a Windows 10 device named Client1 that connects to Vnet1 by using a Point-to-Site (P2S) IKEv2 VPN.

You implement virtual network peering between Vnet1 and Vnet2. Vnet1 allows gateway transit Vnet2 can use the remote gateway.

You discover that Client1 cannot communicate with Vnet2.

You need to ensure that Client1 can communicate with Vnet2.

Solution: You resize the gateway of Vnet1 to a larger SKU.

Does this meet the goal?

A. No

B. Yes

Answer: ([SHOW ANSWER](#))

Valid AZ-801 Dumps shared by EduDump.com for Helping Passing AZ-801 Exam! EduDump.com now offer the **newest AZ-801 exam dumps**, the EduDump.com AZ-801 exam **questions have been updated** and **answers have been corrected** get the **newest** EduDump.com AZ-801 dumps with Test Engine here: <https://www.edudump.com/exams/Microsoft/AZ-801/premium/> (297 Q&As Dumps, **35%OFF** Special Discount Code: **freecram**)

NEW QUESTION: 107

You have a server named Server1 that runs Windows Server 2019 and has the Hyper-V server role installed. Server1 hosts the virtual machines shown in the following table.

Name	Configuration version	Generation
VM1	9.0	1
VM2	8.0	1
VM3	9.0	2
VM4	5.0	2

You deploy a new server named Server2 that runs Windows Server 2025 and has the Hyper-V server role installed. You need to distribute the virtual machines across both servers. Which virtual machines can you import to Server2?

- A. VM1, VM2, VM3, andVM4
- B. VM1, VM2, and VM3 only
- C. VM3 only
- D. VM1 and VM3 only
- E. VM3 and VM4 only

Answer: (SHOW ANSWER)

NEW QUESTION: 108

Your on-premises network contains an Active Directory Domain Services (AD DS) domain. The domain contains a server named Server1 that hosts an app named App1. App1 uses Active Directory authentication. You have a Microsoft Entra tenant that contains a user named User1. You deploy Microsoft Entra Connect sync and configure password synchronization. User1 fails to authenticate to Appl. You need to ensure that User1 can authenticate to Appl. What should you do?

- A. For Microsoft Entra Connect sync, enable password writeback.
- B. For Microsoft Entra Connect sync, enable the BlockCloudObjectTakeoverThroughHardMatch feature.
- C. From the AD DS domain, create a new user account named User1.
- D. For Microsoft Entra Connect sync, disable soft match.

Answer: (SHOW ANSWER)

NEW QUESTION: 109

You have an Azure virtual machine named VM1 that runs Windows Server. When you attempt to install the Azure Performance Diagnostics extension on VM I, the installation fails. You need to identify the cause of the installation failure. What are two possible ways to achieve the goal? Each correct answer presents a complete solution. NOTE: Each correct selection is worth one point.

- A. Sign into VM1 and verify the MonitoringAgentlog file.
- B. Sign in to VM1 and verify the WaAppAgentlog file.
- C. From the Azure portal, view the activity log for VM1.
- D. From the Azure portal, view the alerts for VM1.

Answer: (SHOW ANSWER)

NEW QUESTION: 110

You need to back up Server 4 to meet the technical requirements. What should you do first?

- A.** Deploy Microsoft Azure Backup Server (MABS).
- B.** Configure Windows Server Backup.
- C.** Install the Microsoft Azure Recovery Services (MARS) agent.
- D.** Configure Storage Replica.

Answer: ([SHOW ANSWER](#))

Reference:

<https://docs.microsoft.com/en-us/azure/backup/install-mars-agent>

NEW QUESTION: 111

You have an Azure subscription. The subscription contains 100 virtual machines that run Windows Server 2025.

You plan to implement data collection rules (OCRs) in Azure Monitor to collect Application logs and System logs from the virtual machines.

You need to filter the events collected based on custom criteria.

Which query language should you use?

- A.** XPath
- B.** WQL
- C.** LINQ
- D.** KQL

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 112

You have an on premises Hyper-V host named Server 1. Server1 contains a virtual machine named VM1. You have a non-domain joined Hyper-V server named Server2 that is hosted in a remote location. You plan to replicate VM1 to Server2 by using Hyper-V Replica. You need to configure replication on Server1. Which authentication method can you use?

- A.** NTLM
- B.** Kerberos
- C.** certificate
- D.** preshared secret

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 113

You have an on-premises server named Server1 that runs Windows Server.

You have a Microsoft Sentinel workspace named sentinel.

You need to collect Windows Defender Firewall events from Server1 to sentinel.

Which two pages should you use in the Azure portal? To answer, select the appropriate pages in the answer area.

NOTE: Each correct selection is worth one point.



Search

> General

> Threat management

✓ Content management

Content hub

Repositories (Preview)

Community

✓ Configuration

Workspace manager
(Preview)

Data connectors

Analytics

Watchlist

Automation

Settings

Answer:



Microsoft Sentinel

Selected workspace: 'sentinel'

Search

> General

> Threat management

✓ Content management

Content hub ✓

Repositories (Preview)

Community

✓ Configuration

Workspace manager
(Preview)

Data connectors ✓

Analytics

Watchlist

Automation

Settings

Explanation:



Search

> General

> Threat management

Content management

Content hub

Repositories (Preview)

Community

Configuration

Workspace manager (Preview)

Data connectors

Analytics

Watchlist

Automation

Settings

NEW QUESTION: 114

You have an on-premises server that runs Windows Server and contains a folder named Folder1. Folder1 contains 50 GB of files.

You have an Azure subscription that contains an Azure Files share named share1.

You need to migrate the data in Folder1 to share1.

What should you do? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

Answer Area

Deploy to Azure:

- An Azure Storage account
- ArcBox
- An Azure Migrate project
- An on-premises data gateway
- An Azure Storage account**
- A Storage Sync Service instance

Install on Server1:

- The Azure File Sync agent
- The Azure Connected Machine agent
- The Azure File Sync agent**
- Storage Migration Service
- Storage Replica

Answer:

Answer Area

Deploy to Azure:

- An Azure Storage account
- ArcBox
- An Azure Migrate project
- An on-premises data gateway
- An Azure Storage account**
- A Storage Sync Service instance

Install on Server1:

- The Azure File Sync agent
- The Azure Connected Machine agent
- The Azure File Sync agent**
- Storage Migration Service
- Storage Replica

Explanation:

Answer Area

Deploy to Azure:

An Azure Storage account

Install on Server1:

The Azure File Sync agent

NEW QUESTION: 115

Which domain controller should be online to meet the technical requirements for DC4?

- A. DC3
- B. DC2
- C. DC1

Answer: (SHOW ANSWER)

NEW QUESTION: 116

You have three servers named Server1. Server1 and Server3 that run Windows Server and have the hyper V server role installed. Server 1 hosts an Azure Migrate appliance named Migrate1.

You plan to migrate virtual machines to Azure.

You need to ensure that any new virtual machines created on Server 1. Server2 and Server3 are available in Azure Migrate What should you do?

- A. On the network that has Migrate1 deployed, deploy a WINS server.
- B. On the DNS server used by Migrate 1, create a GlobalName zone.
- C. On Migrate1, set the Startup Type of the Computer Browser service to Automatic
- D. On Migrate1, add a discovery source.

Answer: (SHOW ANSWER)

NEW QUESTION: 117

You need to meet the technical requirements for User1.

To which group in contoso.com should you add User1?

- A. Schema Admins
- B. Account Operators
- C. Domain Admins
- D. Backup Operators

Answer: (SHOW ANSWER)

NEW QUESTION: 118

Your network contains an Active Directory Domain Services (AD DS) domain. The domain contains a group named Group1 and the member servers shown in the following table.

Name	Operating system	Printer Port (LPT1)
Server1	Windows Server 2019	Enabled
Server2	Windows Server 2025	Enabled

Server1 contains the printers shown in the following table.

Name	Connected to	Permission to print
Printer1	LPT1: Printer Port	Group1
Printer2	Local Port: Port1	Group1
Printer3	192.158.10.15: Standard TCP/IP Port	Group1
Printer4	File: Print to File	Group1

You use Print Management to migrate the printers from Server1 to Server2.

Which migrated printers can print to file, and to which migrated printers can the members of Group1 print?

To answer, select the appropriate options in the answer area.

Answer Area

Print to file:

Printer1 only

Printer4 only

Printer2 and Printer3 only

Printer1, Printer2, and Printer4 only

Printer1, Printer2, Printer3, and Printer4

Group1 members can print to:

No printers

Printer1 only

Printer4 only

Printer2 and Printer3 only

Printer1, Printer2, and Printer4 only

Printer1, Printer2 Printer3, Printer4

Answer:

Answer Area

Print to file:

Printer1 only

Printer4 only

Printer2 and Printer3 only

Printer1, Printer2, and Printer4 only

Printer1, Printer2, Printer3, and Printer4

Group1 members can print to:

No printers

Printer1 only

Printer4 only

Printer2 and Printer3 only

Printer1, Printer2, and Printer4 only

Printer1, Printer2 Printer3, Printer4

Explanation:

Answer Area

Print to file:

Printer4 only

Group1 members can print to:

Printer1, Printer2, Printer3, and Printer4

NEW QUESTION: 119

You have an Azure subscription. The subscription contains a virtual machine named Serve1 that run Windows Server.

You create a new Log Analytics workspace named Workspace1. You need to collect performance metrics for Server! by using Azure Monitor. What should you do next?

- A. Server1 that runs Windows Server.
- B. Regenerate the secondary key.
- C. Deploy and configure Windows Event Forwarding.
- D. Create a data collection rule (DCR).
- E. Install the Azure Connected Machine agent.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 120

Your network contains an Active Directory Domain Services (AD DS) domain. You plan to protect high- privilege domain credentials by specifying the following:

- * The lifetime of the Kerberos Ticket Granting Ticket (TGT)
- * The conditions required for devices to request a TGT

What should you use, and what should you create? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.



Answer:



Explanation:



NEW QUESTION: 121

You have an on-premises Active Directory Domain Services (AD DS) domain that syncs with an Azure Active Directory (Azure AD) tenant. The AD DS domain contains a domain controller named DC1. DC1 does NOT have internet access. You need to configure password security for on-premises users. The solution must meet the following requirements:

- * Prevent the users from using known weak passwords.
- * Prevent the users from using the company name in passwords.

What should you do? To answer, drag the appropriate configurations to the correct targets. Each configuration may be used once, more than once, or not at all. You may need to drag the split bar between panes or scroll to view content.

NOTE: Each correct selection is worth one point.

Configurations

Configure Azure AD Identity Protection.

Configure Azure AD Password Protection.

Install the Azure AD Pass-through Authentication Agent.

Install the Azure AD Password Protection DC agent.

Install the Azure AD Password Protection proxy service.

Answer Area

On DC1:

Configuration

On a member server:

Configuration

In Azure:

Configuration

Answer:

Configurations

Configure Azure AD Identity Protection.

Configure Azure AD Password Protection.

Install the Azure AD Pass-through Authentication Agent.

Install the Azure AD Password Protection DC agent.

Install the Azure AD Password Protection proxy service.

Answer Area

On DC1:

Install the Azure AD Password Protection DC agent.

On a member server:

Install the Azure AD Password Protection proxy service.

In Azure:

Configure Azure AD Password Protection.

Explanation:

On DC1:

Install the Azure AD Password Protection DC agent.

On a member server:

Install the Azure AD Password Protection proxy service.

In Azure:

Configure Azure AD Password Protection.

Reference:

<https://docs.microsoft.com/en-us/azure/active-directory/authentication/howto-password-ban-bad-on-premises-deploy>

Valid AZ-801 Dumps shared by EduDump.com for Helping Passing AZ-801 Exam! EduDump.com now offer the **newest AZ-801 exam dumps**, the EduDump.com AZ-801 exam **questions have been updated** and **answers have been corrected** get the **newest** EduDump.com AZ-801 dumps with Test Engine here: <https://www.edudump.com/exams/Microsoft/AZ-801/premium/> (297 Q&As Dumps, **35%OFF** Special Discount Code: **freecram**)

NEW QUESTION: 122

Note: This question is part of a series of questions that present the same scenario. Each question in the series contains a unique solution that might meet the stated goals. Some question sets might have more than one correct solution, while others might not have a correct solution.

After you answer a question in this section, you will NOT be able to return to it. As a result, these questions will not appear in the review screen.

You have a server named Server1 that runs Windows Server.

You need to ensure that only specific applications can modify the data in protected folders on Server1.

Solution: From App & browser control, you configure the Exploit protection settings.

Does this meet the goal?

A. Yes

B. No

Answer: ([SHOW ANSWER](#))

Reference:

[https://docs.microsoft.com/en-us/microsoft-365/security/defender-endpoint/customize-controlled-folders?](https://docs.microsoft.com/en-us/microsoft-365/security/defender-endpoint/customize-controlled-folders?view=o365-worldwide)

[view=o365-worldwide](https://docs.microsoft.com/en-us/microsoft-365/security/defender-endpoint/customize-controlled-folders?view=o365-worldwide)

NEW QUESTION: 123

You have an on-premises Active Directory Domain Services (AD DS) domain that contains the resources shown in the following table.

Name	Type	Description
User1	User	Is a member of Group1
User2	User	Has a phone number of 111-111
User3	User	Is in the Users container
Group1	Group	None
OU1	Organizational unit (OU)	Is empty

The domain contains the domain controllers shown in the following table.

Name	Site
DC1	Site1
DC2	Site2

You configure a site link between Site1 and Site2 and set the replication interval to 20 minutes.

At 10:00 AM, connectivity between Site1 and Site2 fails.

Administrators perform the actions shown in the following table.

Time	Performed on	Description
10:05 AM	DC1	Move User3 to OU1.
10:07 AM	DC2	Remove User1 from Group1.
10:10 AM	DC1	Change the phone number of User2 to 222-222.
10:11 AM	DC1	Change the phone number of User2 to 333-333.
10:12 AM	DC1	Add User2 to Group1.
10:20 AM	DC2	Delete OU1.
10:25 AM	DC2	Change the phone number of User2 to 444-444.

At 10:30 AM, connectivity between Site1 and Site2 is restored.

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

NOTE: Each correct selection is worth dim point

Answer Area

Statements

At 11:30 AM, User1 and User2 are members of Group1.

At 11:30 AM, the phone number of User2 is 333-333.

At 11:30 AM, User3 is deleted.

Yes

No

Answer:

Answer Area

Statements

At 11:30 AM, User1 and User2 are members of Group1.

At 11:30 AM, the phone number of User2 is 333-333.

At 11:30 AM, User3 is deleted.

Yes

No

Explanation:

Answer Area

Statements

At 11:30 AM, User1 and User2 are members of Group1.

At 11:30 AM, the phone number of User2 is 333-333.

At 11:30 AM, User3 is deleted.

Yes

No

NEW QUESTION: 124

Your network contains an Active Directory Domain Services (AD DS) domain. The domain contains servers that run Windows Server as shown in the following table.

Name	IP address
Server1	172.16.10.10
Server2	172.16.20.50
Server3	172.16.30.80

Server1 has the connection security rules shown in the following table.

Name	Endpoint 1	Endpoint 2	Authentication mode	Authentication method
Rule11	172.16.10.0/24	172.16.20.50	Require inbound and outbound	Computer (NTLMv2)
Rule12	172.16.10.10	172.16.0.0/16	Request inbound and outbound	Computer (Kerberos V5)

Server2 has the connection security rules shown in the following table.

Answer Area

Statements

Server1 can communicate with Server2 successfully.

Server2 can communicate with Server3 successfully.

Server3 can communicate with Server2 successfully.

Yes

No

Answer:
ANSWER AREA

Statements

Server1 can communicate with Server2 successfully.

Server2 can communicate with Server3 successfully.

Server3 can communicate with Server2 successfully.

Yes

No

Explanation:

Answer Area

Microsoft

Statements

Server1 can communicate with Server2 successfully.

Server2 can communicate with Server3 successfully.

Server3 can communicate with Server2 successfully.

Yes

No

NEW QUESTION: 125

Your network contains two Active Directory Domain Services (AD DS) forests named contoso.com and fabrikam.com. Contoso.com includes the groups shown in the following table.

Name	Type
Group1	Security Group - Domain Local
Group2	Security Group - Global
Group3	Security Group - Universal
Group4	Distribution Group - Domain Local

You need to migrate the groups to fabrikam.com by using ADMT.
Which groups can be migrated and which groups can have the sidHistory attribute populated after the migration?

Answer Area

Can be migrated:

Group3 only

Group1 and Group4 only

Group2 and Group3 only

Group1, Group2 and Group3 only

Group1, Group2, Group3 and Group4

Can have sidHistory:

Group3 only

Group1 and Group4 only

Group2 and Group3 only

Group1, Group2 and Group3 only

Group1, Group2, Group3 and Group4

Answer:

Answer Area



Microsoft

Can be migrated:

Group3 only
Group1 and Group4 only
Group2 and Group3 only
Group1, Group2 and Group3 only
Group1, Group2, Group3 and Group4

Can have sIDHistory:

Group3 only
Group1 and Group4 only
Group2 and Group3 only
Group1, Group2 and Group3 only
Group1, Group2, Group3 and Group4

Explanation:

Answer Area



Microsoft

Can be migrated:

Group1, Group2 and Group3 only

Can have sIDHistory:

Group1, Group2 and Group3 only

NEW QUESTION: 126

You have a server that runs Windows Server 2025 Standard and has the Hyper-V role installed. You need to upgrade the server to Windows Server 2025 Datacenter. The solution must minimize downtime. What should you run?

- A. `dism.exe`
- B. `setup.exe`
- C. `slmgr.vbs`
- D. `convert.exe`

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 127

Your network contains an Active Directory Domain Services (AD DS) domain. The functional level of the domain is Windows Server 2012 R2.

You need to create and link an authentication policy silo.

What should you do first?

- A. Create an authentication policy silo.
- B. Raise the domain functional level to Windows Server 2025.
- C. Create an authentication policy.
- D. Raise the domain functional level to Windows Server 2016.

Answer: ([SHOW ANSWER](#))

NEW QUESTION: 128

You manage 200 physical servers that run Windows Server.

You plan to migrate the servers to Azure.

You need to prepare for discovery of the servers by using Azure Migrate.

Which three actions should you perform in sequence on a physical server? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Actions

Download and extract the Azure Migrate installer script ZIP file.

Download and extract the Azure Migrate Appliance VHD file.

Run AzureMirgrateInstaller.ps1.

Import a virtual machine.

Configure the appliance and register the appliance with Azure Migrate.

Answer Area

Answer:

Actions

Download and extract the Azure Migrate installer script ZIP file.

Download and extract the Azure Migrate Appliance VHD file.

Run AzureMirgrateInstaller.ps1.

Import a virtual machine.

Configure the appliance and register the appliance with Azure Migrate.

Answer Area

Download and extract the Azure Migrate installer script ZIP file.

Run AzureMirgrateInstaller.ps1.

Configure the appliance and register the appliance with Azure Migrate.

Explanation:



Reference:

<https://docs.microsoft.com/en-us/azure/migrate/tutorial-discover-physical>

NEW QUESTION: 129

You have 50 on-premises servers that run Windows Server. You have an Azure subscription that contains 50 virtual machines that run Windows Server. You need to create an Azure Monitor alert that will be triggered if one of the servers or virtual machines has less than 10 percent available disk space. What should you do first?

- A. Create an Alert Rule
- B. Install the Azure Monitor agent on each server.
- C. Enable System Insights on each server.
- D. Create a Log Analytics workspace and configure the Agent management settings.

Answer: (SHOW ANSWER)

<https://learn.microsoft.com/en-us/answers/questions/165893/help-to-set-up-azure-alert-for-disk-space-alert-wh.html>

NEW QUESTION: 130

You have an on-premises server named Server1 that runs Windows Server. Server1 has the Web Server (IIS) server role installed and hosts an ASP.NET web app named App1. You have an Azure subscription. You plan to migrate App1 to a container in Azure. You need to export App1 to a ZIP file. What should you install on Server1?

- A. Docker Enterprise
- B. Web Deploy
- C. the IIS Management Scripts and Tools role service
- D. the Windows Server Migration Tools feature

Answer: (SHOW ANSWER)

NEW QUESTION: 131

You have an Azure virtual machine named VM1 that runs Windows Server. You need to perform the following tasks on VM1:

- * Configure Windows Defender Firewall to allow Remote Desktop connections.
- * Configure where to store the logs of the virtual machine console.

Which two settings should you use? To answer, select the settings in the answer area. NOTE: Each correct selection is worth one point.

 VM1 ...
Virtual machine

 Search (Ctrl+)

 Metrics

 Diagnostic settings 

 Logs

 Connection monitor (classic)

 Workbooks

Automation

 Tasks (preview)

 Export template

Support + troubleshooting

 Resource health

 Boot diagnostics

 Performance diagnostics

 VM Inspector (Preview)

 Reset password

 Redeploy + reapply

 Serial console 

 Connection troubleshoot

 New Support Request

Answer:

**VM1**
Virtual machine



Microsoft

Search (Ctrl+ /)

Metrics

Diagnostic settings

✓

Logs

Connection monitor (classic)

Workbooks

Automation

Tasks (preview)

Export template

Support + troubleshooting

Resource health

Boot diagnostics

Performance diagnostics

VM Inspector (Preview)

Reset password

Redeploy + reapply

Serial console

✓

Connection troubleshoot

New Support Request

Explanation:

Answer Area

VM1 Virtual machine

Search (Ctrl+ /)

Metrics

D diagnostic settings ✓

Logs

Connection monitor (classic)

Workbooks

Automation

Tasks (preview)

Export template

Support + troubleshooting

Resource health

Boot diagnostics

Performance diagnostics

VM Inspector (Preview)

Reset password

Redeploy + reapply

Serial console ✓

Connection troubleshoot

New Support Request

Microsoft

freeexam.net

NEW QUESTION: 132

You are planning the migration of APP3 and APP4 to support the Azure migration plan.
What should you do on Cluster1 and in Azure before you perform the migration? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth one point.

On Cluster1:

Microsoft

Configure Azure Network Adapter.
Create a Point-to-Site (P2S) VPN connection to Vnet1.
Import the Azure Migrate appliance.
Install the Azure File Sync agent.
Install the Windows Server Migration Tools.

In Azure:

Microsoft

Create a premium block blobs Azure Storage account.
Create a private endpoint.
Create a VPN gateway.
Create an Azure Migrate project.

Answer:

On Cluster1:

Microsoft

Configure Azure Network Adapter.
Create a Point-to-Site (P2S) VPN connection to Vnet1.
Import the Azure Migrate appliance.
Install the Azure File Sync agent.
Install the Windows Server Migration Tools.

In Azure:

Microsoft

Create a premium block blobs Azure Storage account.
Create a private endpoint.
Create a VPN gateway.
Create an Azure Migrate project.

Explanation:

On Cluster1:

Microsoft

Configure Azure Network Adapter.
Create a Point-to-Site (P2S) VPN connection to Vnet1.
Import the Azure Migrate appliance.
Install the Azure File Sync agent.
Install the Windows Server Migration Tools.

In Azure:

Microsoft

Create a premium block blobs Azure Storage account.
Create a private endpoint.
Create a VPN gateway.
Create an Azure Migrate project.

Reference:

<https://docs.microsoft.com/en-us/azure/migrate/tutorial-discover-hyper-v>

NEW QUESTION: 133

You have a server that runs Windows Server and hosts an app named Appl.

You need to prevent App1 from accessing external SMTP servers. The solution must meet the following requirements:

- * Minimize the impact on AppVs access to external HTTP servers.
- * Minimize the impact on other apps on (he server.
- * Minimize administrative effort

What should you implement in Windows Defender Firewall?

- A.** an outbound program rule
- B.** an inbound custom rule
- C.** an outbound port rule
- D.** an inbound program rule
- E.** an outbound custom rule

Answer: A ([LEAVE A REPLY](#))

NEW QUESTION: 134

Your on-premises network has a 200-Mbps connection to Azure and contains a server named Server1 that stores 70 TB of data files.

You have an Azure Storage account named storage 1.

You plan to migrate the data files from Server1 to a blob storage container in storage!. Testing shows that copying the data files by using azcopy will take approximately 35 days.

You need to minimize how long it will take to migrate the data to Azure.

What should you use?

- A.** Storage Migration Service
- B.** Azure Data Box
- C.** Azure File Sync
- D.** Azure Storage Explorer

Answer: B ([LEAVE A REPLY](#))

NEW QUESTION: 135

You have a Microsoft Sentinel deployment and 100 Azure Arc-enabled on-premises servers. All the Azure Arc-enabled resources are in the same resource group.

You need to onboard the servers to Microsoft Sentinel. The solution must minimize administrative effort.

What should you use to onboard the servers to Microsoft Sentinel?

- A.** Azure Automation
- B.** Azure Policy
- C.** Azure virtual machine extensions
- D.** Microsoft Defender for Cloud

Answer: ([SHOW ANSWER](#)**)**

Reference:

<https://docs.microsoft.com/en-us/azure/cloud-adoption-framework/manage/hybrid/server/best-practices/arc-policies-mma>

NEW QUESTION: 136

Your network contains an on-premises Active Directory Domain Services (AD DS) domain named contos.

com. The domain contains the accounts shown in the following table.

Name	Account type	In organizational unit (OU)
Admin1	User	OU1
Admin2	User	OU2
Server1	Computer	OU3
Server2	Computer	OU4

The domain is configured to store BitLocker recovery keys in Active Directory.

- * Admin1 turns on BitLocker Drive Encryption (BitLocker) for volume C on Server1.
- * Admin1 moves Server1 to OU1.
- * Admin2 turns on BitLocker for removable volume E on Server2.
- * Admin2 moves removable volume E from Server2 to Server1 and unlocks the volume.

On which Active Directory object can you each BitLocker recovery key? To answer, select the appropriate options in the answer area.

NOTE: Each correct selection is worth on point.

Answer Area

The BitLocker recovery key for volume C:

The BitLocker recovery for key volume E:

Microsoft

Answer:

see the answer below in image.

Explanation:

Answer as:

Answer Area

Microsoft

The BitLocker recovery key for volume C:

The BitLocker recovery for key volume E:

Valid AZ-801 Dumps shared by EduDump.com for Helping Passing AZ-801 Exam! EduDump.com now offer the **newest AZ-801 exam dumps**, the EduDump.com AZ-801 exam **questions have been updated** and **answers have been corrected** get the **newest** EduDump.com AZ-801 dumps with Test Engine here: <https://www.edudump.com/exams/Microsoft/AZ-801/premium/> (297 Q&As Dumps, **35%OFF** Special Discount Code: **freecram**)

NEW QUESTION: 137

You have a Windows Server failover cluster named Cluster1 that has a cloud witness and the nodes shown in the following table.

Name	Windows Server role	Assigned vote
Node1	File Server, DFS Namespace Server	1
Node2	DFS Namespace Server	1
Node3	File Server, DFS Namespaces Server	1
Node4	File Server	0

Cluster1 has the roles shown in the following table.

Name	Cluster role
FS1	File Server for general use
DFS1	DFS Namespace Server

Cluster1 has the following configuration.

```
PS C:\> Get-ClusterFaultDomain
```

Name	Type	ParentName	ChildrenNames	Location
Site1	Site		{Node1, Node2}	
Site2	Site		{Node3, Node4}	
Node1	Node	Site1		
Node2	Node	Site1		
Node3	Node	Site2		
Node4	Node	Site2		

For each of the following statements, select Yes if the statement is true. Otherwise, select No.
NOTE: Each correct selection is worth one point.

Statements	Yes	No
If FS1 runs on Node3, and Node3 fails, FS1 will fail over to Node4 automatically.	☐	☐
If DFS1 runs on Node2, and Node2 fails, DFS1 will fail over to Node3 automatically.	☐	☐
If Site2 fails, DFS1 will remain available.	☐	☐

Answer:

Statements	Yes	No
If FS1 runs on Node3, and Node3 fails, FS1 will fail over to Node4 automatically.	☒	☐
If DFS1 runs on Node2, and Node2 fails, DFS1 will fail over to Node3 automatically.	☐	☒
If Site2 fails, DFS1 will remain available.	☒	☐

Explanation:

Statements	Yes	No
If FS1 runs on Node3, and Node3 fails, FS1 will fail over to Node4 automatically.	☒	☐
If DFS1 runs on Node2, and Node2 fails, DFS1 will fail over to Node3 automatically.	☐	☒
If Site2 fails, DFS1 will remain available.	☒	☐

NEW QUESTION: 138

Your network contains a single-domain Active Directory Domain Services (AD DS) forest named contoso.com. The functional level of the forest is Windows Server 2012 R2. All domain controllers run Windows Server 2012 R2.

Sysvol replicates by using the File Replication Service (FRS).

You plan to replace the existing domain controllers with new domain controllers that will run Windows Server 2022.

You need to ensure that you can add the first domain controller that runs Windows Server 2022.

Solution; You raise the domain and forest functional levels.

Does this meet the goal?

- A. Yes
 - B. No
- Answer: (SHOW ANSWER)

Topic 2, Fabrikam inc

Case study

This is a case study. Case studies are not timed separately. You can use as much exam time as you would like to complete each case. However, there may be additional case studies and sections on this exam. You must manage your time to ensure that you are able to complete all questions included on this exam in the time provided.

To answer the questions included in a case study, you will need to reference information that is provided in the case study. Case studies might contain exhibits and other resources that provide more information about the scenario that is described in the case study. Each question is independent of the other questions in this case study.

At the end of this case study, a review screen will appear. This screen allows you to review your answers and to make changes before you move to the next section of the exam. After you begin a new section, you cannot return to this section.

To start the case study

To display the first question in this case study, click the Next button. Use the buttons in the left pane to explore the content of the case study before you answer the questions. Clicking these buttons displays information such as business requirements, existing environment, and problem statements. If the case study has an All Information tab, note that the information displayed is identical to the information displayed on the subsequent tabs. When you are ready to answer a question, click the Question button to return to the question.

Overview

Fabrikam, Inc. is a manufacturing company that has a main office in Chicago and a branch office in Paris.

Existing Environment

Identity Infrastructure

Fabrikam has an Active Directory Domain Services (AD DS) forest that syncs with an Azure Active Directory (Azure AD) tenant. The AD DS forest contains two domains named corp.fabrikam.com and europe.fabrikam.com.

Chicago Office On-Premises Servers

The office in Chicago contains on-premises servers that run Windows Server 2016 as shown in the following table.

Name	Type	Configuration
HV1	Physical	Hyper-V host
HV2	Physical	Hyper-V host
APP1	Virtual machine	Application server
APP2	Virtual machine	Application server
APP3	Virtual machine	Application server
APP4	Virtual machine	Application server
DC1	Virtual machine	Domain controller
Archive1	Physical	File server
DHCP1	Virtual machine	DHCP server
Fileserver1	Virtual machine	File server
WEB1	Virtual machine	Web server
WEB2	Virtual machine	Web server
AADC1	Virtual machine	Azure AD Connect

All the servers in the Chicago office are in the corp.fabrikam.com domain.

All the virtual machines in the Chicago office are hosted on HV1 and HV2. HV1 and HV2 are nodes in a failover cluster named Cluster1.

WEB1 and WEB2 run an Internet Information Services (IIS) website. Internet users connect to the website by using a URL of https://www.fabrikam.com.

All the users in the Chicago office run an application that connects to a UNC path of \\Fileserver1\Data.

Paris On-Premises Servers

The office in Paris contains a physical server named dc2.europe.fabrikam.com that runs Windows Server 2016 and is a domain controller for the europe.fabrikam.com domain.

Network Infrastructure

The networks in both the Chicago and Paris offices have local internet connections. The Chicago and Paris offices are connected by using VPN connections. The client computers in the Chicago office get IP addresses from DHCP1.

Security Risks

Fabrikam identifies the following security risks:

- * Some accounts connect to AD DS resources by using insecure protocols such as NTLMv1, SMB1, and unsigned LDAP.
- * Servers have Windows Defender Firewall enabled. Server administrators sometimes modify firewall rules and allow risky connections.

Requirements

Security Requirements

Fabrikam identifies the following security requirements:

- * Prevent server administrators from configuring Windows Defender Firewalls rules.
- * Encrypt all the data disks on the servers by using BitLocker Drive Encryption (BitLocker).
- * Ensure that only authorized applications can be installed or run on the servers in the forest.
- * Implement Microsoft Sentinel as a reporting solution to identify all connections to the domain controllers that use insecure protocols.

On-Premises Migration Plan

Fabrikam plans to migrate all the existing servers and identifies the following migration requirements:

- * Move the APP1 and APP2 virtual machines in the Chicago office to a new Hyper-V failover cluster named Cluster2 that will run Windows Server 2022.
- * Cluster2 will contain two new nodes named HV3 and HV4.
- * All virtual machine files will be stored on a Cluster Shared Volume (CSV).

Migrate Archive1 to a new failover cluster named Cluster3 that will run Windows Server 2022.

- * Cluster3 will contain two physical nodes named Node1 and Node2.
- * The file shares on Cluster3 will be a failover cluster role in active-passive mode.

Migrate all users, groups, and client computers from europe.fabrikam.com to corp.fabrikam.com.

- * The migration will be performed by using the Active Directory Migration Tool (ADMT).
- * A computer named ADMTcomputer will be deployed to the corp.fabrikam.com domain to run ADMT migration procedures.
- * User accounts will retain their existing password.

Migrate the data share from Fileserver1 to a new server named Fileserver2 that will run Windows Server 2022. After the migration, the data share must be accessible by using the existing UNC path.

Azure Migration Plan

Fabrikam plans to migrate some resources to Azure and identifies the following migration requirements:

- * Create an Azure subscription named Sub1.
- * Create an Azure virtual network named Vnet1.
- * Use ExpressRoute to connect the Paris and Chicago offices to Vnet1.
- * License all servers for Microsoft Defender for servers.
- * Migrate APP3 and APP4 to Azure.
- * Migrate the www.fabrikam.com website to an Azure App Service web app named WebApp1.
- * Decommission WEB1 and WEB2.

DHCP Migration Plan

Fabrikam plans to replace DHCP1 with a new server named DHCP2 and identifies the following migration requirements:

- * Ensure that DHCP2 provides the same IP addresses that are currently available from DHCP1.
- * Prevent DHCP1 from servicing clients once services are enabled on DHCP2.
- * Ensure that the existing leases and reservations are migrated.

NEW QUESTION: 139

You have a management group named MG1 that contains an Azure subscription named Sub1. Sub1 contains the resources shown in the following table.

Name	Description
RG1	Resource group
VM1	Virtual machine
VNet1	Virtual network
Workspace1	Log Analytics workspace

You need to enable Microsoft Defender for Servers.

From the Azure portal, on which two resources can you enable Defender for Servers? Each correct answer presents a complete solution.

NOTE: Each correct selection is worth one point.

- A. MG1
- B. Sub1
- C. Workspace1
- D. VM1
- E. VNet1
- F. RG1

Answer: (SHOW ANSWER)

NEW QUESTION: 140

You plan to deploy the Azure Monitor agent to 100 on-premises servers that run Windows Server. Which parameters should you provide when you install the agent?

- A. the client ID and the secret of an Azure service principal
- B. the name and the access key of an Azure Storage account
- C. a connection string for an Azure SQL database
- D. the ID and the key of an Azure Log Analytics workspace

Answer: (SHOW ANSWER)

Reference:

<https://docs.microsoft.com/en-us/windows-server/storage/storage-spaces/configure-azure-monitor>

NEW QUESTION: 141

You are evaluating the technical requirements for Cluster2.

What is the minimum number of Azure Site Recovery Providers that you should install?

- A. 12
- B. 1
- C. 16
- D. 4

Answer: (SHOW ANSWER)

NEW QUESTION: 142

You have a Storage Spaces Direct cluster in a hyper-converged deployment. The cluster contains three nodes that run Windows Server 2022. The cluster hosts 20 Hyper-V virtual machines. You need to upgrade the servers to Windows Server 2025. The solution must meet the following requirements:

- * Minimize downtime of the virtual machines.
- * Minimize administrative effort.

Which four actions should you perform on each node in sequence? To answer, move the appropriate actions from the list of actions to the answer area and arrange them in the correct order.

Microsoft

freecram.net

Q14213

ANSWER AREA

⋮

Perform a clean install of Windows Server 2025.

⋮

Evict the node from the cluster.

⋮

Manually move the virtual machines to another node.

⋮

Run the `Suspend-ClusterNode -Drain` cmdlet.

⋮

Place the server in storage maintenance mode.

⋮

Perform an in-place upgrade to Windows Server 2025.

⋮

Disable storage maintenance mode and resume the node.

Answer:

ACTIONS

- Perform a clean install of Windows Server 2025.
- Evict the node from the cluster.
- Manually move the virtual machines to another node.
- Run the `Suspend-ClusterNode -Drain` cmdlet.
- Place the server in storage maintenance mode.
- Perform an in-place upgrade to Windows Server 2025.
- Disable storage maintenance mode and resume the node.

ANSWER AREA

- Run the `Suspend-ClusterNode -Drain` cmdlet.
- Place the server in storage maintenance mode.
- Perform an in-place upgrade to Windows Server 2025.
- Disable storage maintenance mode and resume the node.

Explanation:

ACTIONS

- Perform a clean install of Windows Server 2025.
- Evict the node from the cluster.
- Manually move the virtual machines to another node.

ANSWER AREA

- Run the `Suspend-ClusterNode -Drain` cmdlet.
- Place the server in storage maintenance mode.
- Perform an in-place upgrade to Windows Server 2025.
- Disable storage maintenance mode and resume the node.

NEW QUESTION: 143

Your network contains an on-premises Active Directory Domain Services (AD DS) domain.
The domain contains the servers shown in the following table.

Name	Domain joined
Server1	Yes
Server2	Yes
Server3	Yes

Server1 has the connection security rule as shown in the Server1 exhibit. (Click the Server1 tab.)

Connection Security Rules									
Name	Enabled	Profile	Endpoint 1	Endpoint 2	Authentication mode	Authentication method	Endpoint 1 port	Endpoint 2 port	Protocol
Rule1	Yes	Domain	Any	Any	Require inbound and outbound	Computer (Kerberos V5)	Any	Any	TCP

Server2 has the connection security rule as shown in the Server2 exhibit. (Click the Server2 tab.)

Connection Security Rules									
Name	Enabled	Profile	Endpoint 1	Endpoint 2	Authentication mode	Authentication method	Endpoint 1 port	Endpoint 2 port	Protocol
Rule1	Yes	Domain	Any	Any	Require inbound and outbound	Computer (Kerberos V5)	Any	Any	TCP

Server1 has the inbound firewall rules as shown in the Server1 inbound rules exhibit. (Click the Server1 inbound rules tab.)

Inbound Rules									
Name	Group	Profile	Enabled	Action	Program	Local Address	Remote Address	Protocol	
File and Printer Sharing (Echo Request - ICMPv4-In)	File and Printer Sharing	Domain	Yes	Allow	System	Any	Any	ICMPv4	
File and Printer Sharing (Echo Request - ICMPv6-In)	File and Printer Sharing	Domain	Yes	Allow	System	Any	Any	ICMPv6	
File and Printer Sharing (LLMNR-UDP-In)	File and Printer Sharing	Domain	Yes	Allow	%System...	Any	Local subnet	UDP	
File and Printer Sharing (NB-Datagram-In)	File and Printer Sharing	Domain	Yes	Allow	System	Any	Any	UDP	
File and Printer Sharing (NB-Name-In)	File and Printer Sharing	Domain	Yes	Allow	System	Any	Any	UDP	
File and Printer Sharing (NB-Session-In)	File and Printer Sharing	Domain	Yes	Allow	System	Any	Any	TCP	
File and Printer Sharing (SMB-In)	File and Printer Sharing	Domain	Yes	Allow	System	Any	Any	TCP	
File and Printer Sharing (Spooler Service - RPC)	File and Printer Sharing	Domain	Yes	Allow	%System...	Any	Any	TCP	
File and Printer Sharing (Spooler Service - RPC-EPMAP)	File and Printer Sharing	Domain	Yes	Allow	%System...	Any	Any	TCP	

For each of the following statements, select Yes if the statement is true. Otherwise, select No.

Answer Area			Statements	Yes	No
			Server2 can ping Server1 successfully.	☐	☐
			Server2 can connect to a file share on Server1.	☐	☐
			Server3 can connect to a file share on Server1.	☐	☐

Answer:

Answer Area

Statements	Yes	No
Server2 can ping Server1 successfully.	☒	☐
Server2 can connect to a file share on Server1.	☒	☐
Server3 can connect to a file share on Server1.	☐	☒

Explanation:

Statements	Yes	No
Server2 can ping Server1 successfully.	☒	☐
Server2 can connect to a file share on Server1.	☒	☐
Server3 can connect to a file share on Server1.	☐	☒

NEW QUESTION: 144

You have three servers named Server 1. Servers and Server3 that run Windows Server. The servers have the Hyper-V server role installed and are configured in a Storage Spaces Deed cluster named Cluster1. Cluster1 hosts a virtual machine named VM1 that has Windows Admin Center Installed.

You manage all servers and clusters by using Windows Admin Center.

You purchase an Azure subscription.

You need to configure email alerts in Azure Monitor for the following:

- * Disk Capacity Utilization Over 80% for 10 Minutes
- * Any critical alert in the cluster system event log
- * Memory Utilization over 95% for 10 minutes
- * Heartbeat fewer than 5 beats for 5 Minutes.
- * CPU Utilization over 85 % for 10 Minutes.
- * Any hearth service faults for the cluster

The solution must use the minimum amount of administrative effort.

What should you do?

- A. From Azure portal, configure Azure Monitor and onboard Cluster1 by using Azure Arc.
- B. Configure Azure Monitor and manually install the Microsoft Monitoring Agent on Server1, Server2 and Server3
- C. From Windows Admin Center, configure Azure Monitor and onboard clustered.

Answer: (SHOW ANSWER)

NEW QUESTION: 145

You have two onpremises Hyper-V hosts named Served and Server2, Server1 contains two virtual machines named VM1 and VM2. Server2 contains three virtual machines named VM21. VM22, and VM23.

You have an Azure subscription.
You plan to use Azure Site Recovery to replicate all the virtual machines to Azure.
You need to deploy the Microsoft Azure Site Recovery Provider to the on-premises infrastructure.
What is the minimum number of providers you should install?

- A. 1
- B. 5
- C. 7
- D. 2

Answer: (SHOW ANSWER)

NEW QUESTION: 146

Your network contains an Active Directory Domain Services (AD DS) domain. The domain contains domain controllers that run Windows Server 2019 and are configured as shown in the following table.

Name	FSMO role
DC1	PDC emulator
DC2	RID master
DC3	Domain naming master
DC4	Schema master
DC5	Infrastructure master

You plan to run the adprep /domainprep command.
Which domain controller should be available for the command to complete?

- A. DC2
- B. DC5
- C. DC4
- D. DC1
- E. DC3

Answer: (SHOW ANSWER)

Valid AZ-801 Dumps shared by EduDump.com for Helping Passing AZ-801 Exam! EduDump.com now offer the **newest AZ-801 exam dumps**, the EduDump.com AZ-801 exam **questions have been updated** and **answers have been corrected** get the **newest** EduDump.com AZ-801 dumps with Test Engine here: <https://www.edudump.com/exams/Microsoft/AZ-801/premium/> (297 Q&As Dumps, **35%OFF** Special Discount Code: **freecram**)